




Installation Guide

Armor Grille
For 2007-2018 Wrangler JK

SKU # AMJPAA00134 & AMJPAA00137 & AMJPAA00138

STEP 1

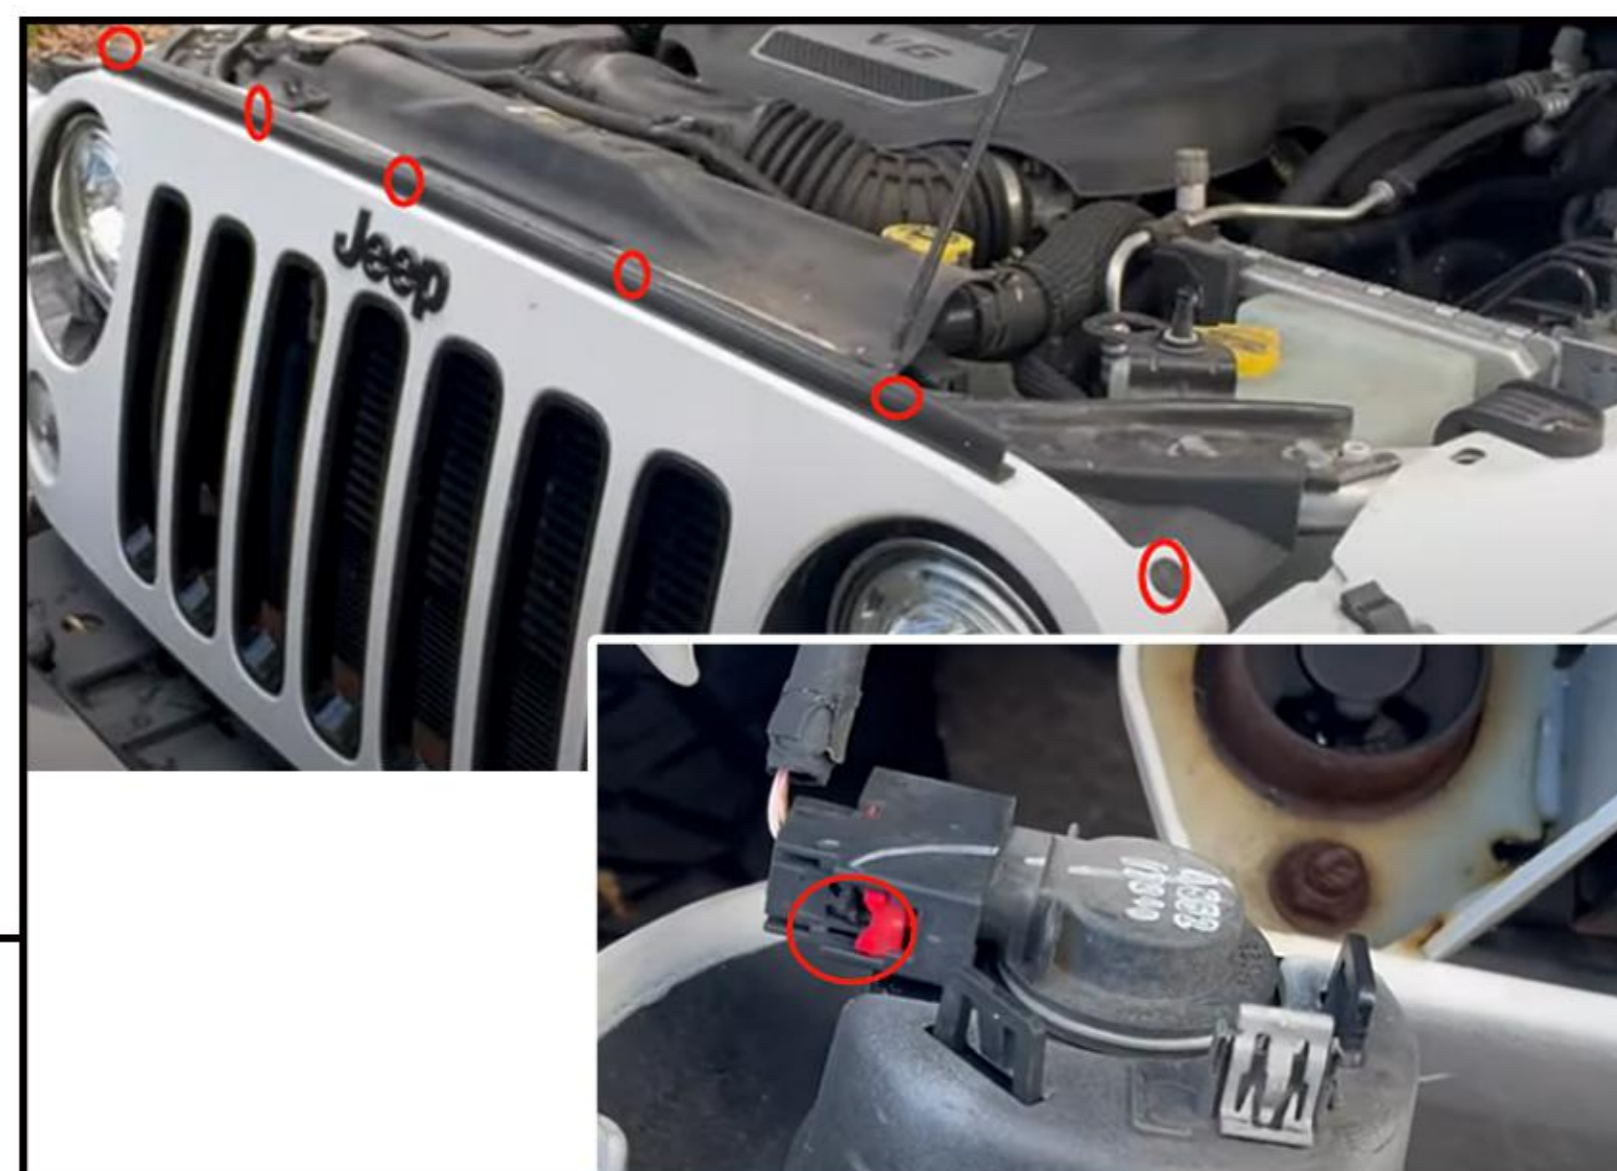

Pop the hood,remove the 6 push clips with a panel removal tool;Unplug the turn signals and pull the grille out of the car.

STEP 2



Remove four pop-in inserts on the bottom of the factory grille with a small screw driver. Remove the retaining clip from the turn signal socket and pull out the turn signal.
(Or you can use the new clips that come with the new grille)

STEP 3



Press the 6 retaining clips,apply the supplied weather stripping accross the top of the grille.

STEP 4



Align the grille to the car and get the retainer clips in the right position.
The red wire connects to the ACC,
the black wire connects to the negative of battery.

STEP 5



Follow the step 1 in reverse order to install the grille to complete the installation.