

LED FOG LIGHTS WITH HALO

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS

CONTENTS

(2) LED Fog Lights
(2) Wiring Harness Adapters
(4) Wire Leads
(4) Scotchlok Connectors
(1) Allen Key

TOOLS REQUIRED

Soft Pry Tool
Phillips Head Screw Driver
18mm Socket
Socket Wrench
Wire Cutters
Multi Meter or Test Light

STEP 1



Remove the (6) plastic push pins holding the factory splash shield onto the vehicle.

STEP 2



Locate the factory fog lights. Disconnect the wiring harness from the lights by depressing the tab on the light's connector. Pull the connector away from the light. Loosen and remove the (8) 18mm nuts securing the bumper to the vehicle.

STEP 3



Using a Phillips head screw driver, remove the (4) screws securing each light to the vehicle.

STEP 4




Secure the fog light assembly to the bumper using the original mounting hardware. Once secured, plug the provided wiring harness adapter and wire lead extensions into the fog light.



STEP 5

Plug the fog light into the vehicle fog light wiring harness. Test Halo functionality, and splice the additional wire leads into the grille mounted parking/turn signal lamp following the diagram above using the included (2) scotchlok connectors.

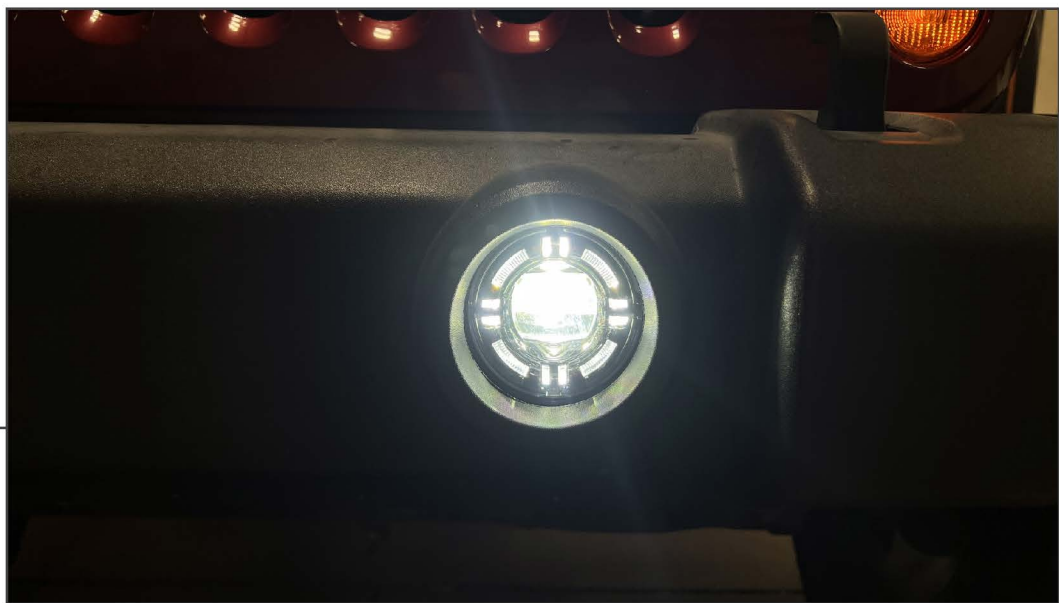

STEP 6

Reinstall the bumper to the vehicle following steps 1-2 in reverse order.

To switch from yellow/white fog light: Turn the fog light switch on/off quickly until the color switches.

Installation is now complete.