

Installation Guide


Trailing Arm Front bush

Suits:Mitsubishi Ralliart

Z 5132

(Always refer to the current catalogue for complete application listings)

N.B: This installation guide should be used in conjunction with the workshop manual.

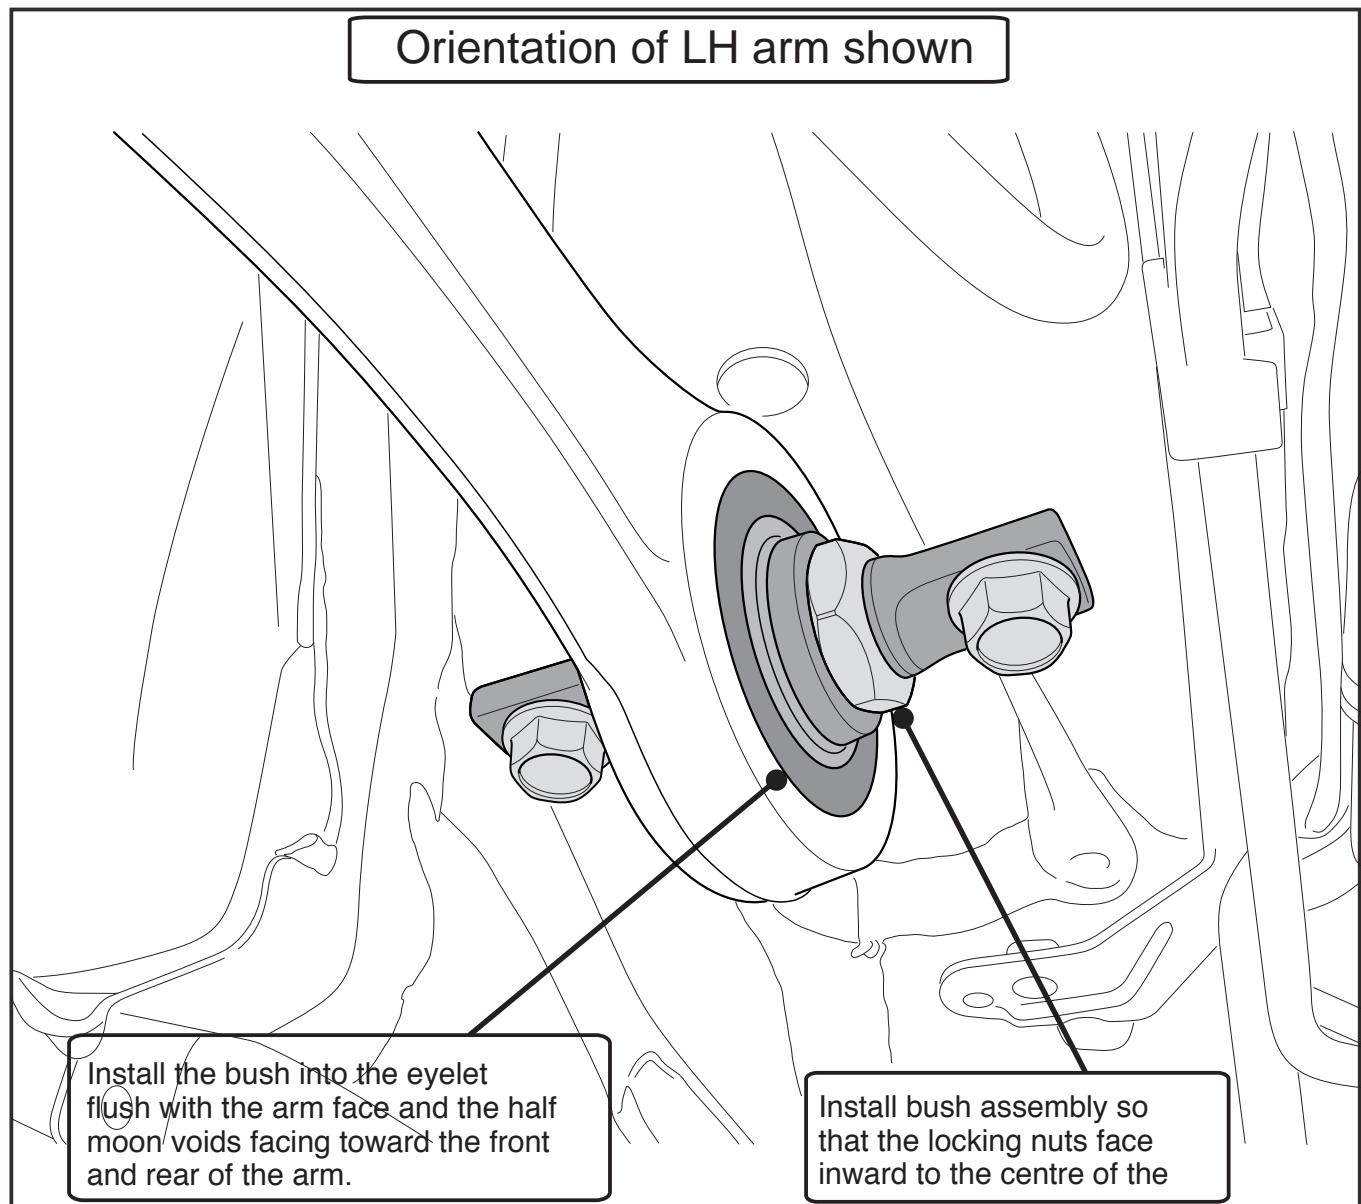

- Note: When adjusting toe angle during wheel aligning loosen the mounting bolts to allow sideways movement of the pin. Failure to do so will result in premature failure of the bush.
- Installation of the bush into the arm requires the removal of the hub assy, reasonable mechanical knowledge and tools are required to undertake this and therefore it is recommended that fitment is carried out by a licenced trades person.
- After fitment please ensure the locking nuts are tight and the addition of thread lock can also be used on the thread.

N.B: It is recommended that a licenced workshop or trades person carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.