



Rear defogger covers user's manual

It is compatible with both right-hand-drive and left-hand-drive models.





Rear window (for left side)

Rear window (for right side)

Compatible car models

Jeep Wrangler(JL): From Dec 2017~ It is compatible with four-door and two-door hardtop models. SPORT/WILLYS/SAHARA/RUBICON/ALTITUDE/TIDE/392

> Jeep WRANGLER (4xe): 2021~ SAHARA/RUBICON/ALTITUDE *It is cannot be installed on soft top vehicles.

Thank you for your purchase. Please read this user's manual in its entirety before using the product.

Specialized skills and knowledge are required to properly install this product. If you are not confident that you can complete installation on your own, we recommend hiring a specialist. * Note to hired installation specialists

Make sure to return this user's manual to the owner after installation.

This user's manual contains important warnings and user notices. Please keep it in an easily accessible location inside the vehicle to facilitate reference at any time

Product Features

- This product is a cover that protects rear-window heater cables and fixing
- •It can reduce problems such as cord breakage and damage to fixing terminals that are likely to occur when loading or unloading cargo.
- •Right-left set (for use on the right and left sides)
- Attached using double-sided tape

⚠ WARNING

•SEIKOSANGYO CO., LTD. is not responsible for any accident, breakdown, malfunction or loss resultingfrom incorrect installation, disassembly or alteration of the product caused by failure to follow the warnings and user notices in this manual.

- •Do not install this product anywhere other than the prescribed location.
- * We are not responsible for any accidents, failures, or damage that may occur as a result of failing to follow the precautions described in this document, or as a result of installing, disassembling, or modifying the product incorrectly.
- Adhere the product in position on a warm day.
- •Be aware that the adhesive strength immediately after adhering the product is not very strong
- * The adhesive strength of the double-sided tape is at its strongest 24 hours after adhering the product.
- This product uses strong double-sided tape and cannot be removed. If the product is removed, the surface on which it was attached may be damaged.
- Seikosangyo Co., I td. takes no responsibility, and will pay no damages/ compensation, for any change or irregularity in the user's vehicle resulting from product installation or usage, including malfunction, breakage, scratches, discoloration, marks or similar,
- •While materials with outstanding heat-resistant and weather-resistant properties are used in this product, the product may deform or deteriorate due to conditions inside the vehicle in extreme heat or due to aging and other factors





548MHG042009A

Contact Information for Product-related Inquiries

Saitama , 342-0043, Japan SEIKOSANGYO CO., LTD.

* Jeep is a registered trademark of Stellantis N.V. * AZUTO is a registered trademark of SEIKOSANGYO CO., LTD.

registered trademark of their respective owners.


Main material ABS

* Planning, Design and Quality control for this product were carried out in Japan,
* Product specifications and appearance are subject to change without prior notice, * All other product names, etc. used in this document are the trademark or

TR- Made in CHINA

Parts

Please check to make sure that all parts shown below are present,




Adhere the product in position on a warm dav.

•Be aware that the adhesive strength immediately after adhering the product is not very strong. The adhesive

strength of the double-sided tape is at its strongest 24 hours after adhering the product.

Installation positions

Rear window heater cable fixing terminal

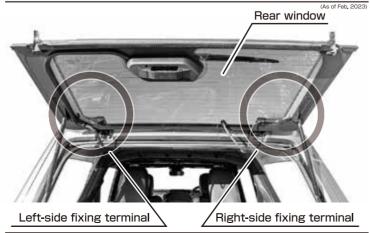

We recommend that you lower the side windows of the vehicle before installing or removing the product

Thoroughly remove dirt, dust, oil, etc. from the installation location with a neutral detergent

Installation procedure

- 1. Check the position of the rear-window heater cable and fixing terminal. 2.After confirming the installation position, clean with a neutral detergent and perform installation steps (1), (2), (3), (4), (5), (6), (7) and (8).
- (1) Remove the right-side heater cable from the clip and rotate it downward.




(2) Lightly cover the left and right fixing terminal covers with the ①/® parts of this product and confirm their position.

* When doing so, align the heater cable with the slits on this product indicated by the arrows.

Left side



(3) Peel off all double-sided tape backings from the left-side part of this product (marked (1) on the back side), place the heater cable on the A slit, and align and cover the ® slit with the cable cover attached to the glass surface.

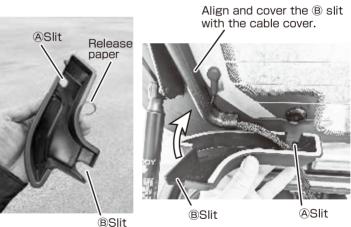

(4) Align with the mesh end of the ceramic line and affix. Early 2018 models do not have a mesh, so locate and horizontally along the ceramic line.



Mesh Ceramic line

mesh end for late


Ceramic lines for early 2018 models

2019 models


(5) Peel off all double-sided tape backings from the right-side part of this product (marked ® on the back side), place the heater cable on the © slit, and fix the heater cable to the n heater cable clip.

DHeater cable clip ©Slit

Insert and secure the heater cable into the D heater cable clip.



(6) Align with the mesh end of the ceramic line and affix. Early 2018 models do not have a mesh, so locate and affix horizontally along the ceramic line.

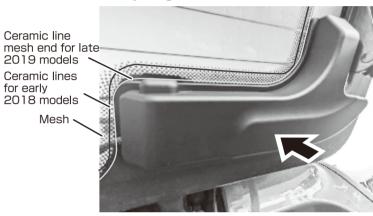

(7) Remove any slack in the heater cable by pushing it into the cover.

* Do not perform these tasks with the rear window closed, as doing so may damage the heater cable



(8) Open and close the rear window glass to confirm that there is no interference with the window frame.



