

# LED TAIL LIGHTS

(2007-2018 WRANGLER JK)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---

- (1) LH Tail Light
- (1) RH Tail Light
- (2) Resistor Brackets
- (4) M4 Bolts
- (4) M4 Lock Nuts
- (4) Vampire Clips

### TOOLS REQUIRED

---


- Phillips Screwdriver
- Pliers
- Exterior Detailer
- Microfiber Cloth

**STEP 1**



Remove the (2) inner Phillips head screws from the tail light assembly. Push the tail light towards the middle of the vehicle to dislodge the inner clips.

**STEP 2**

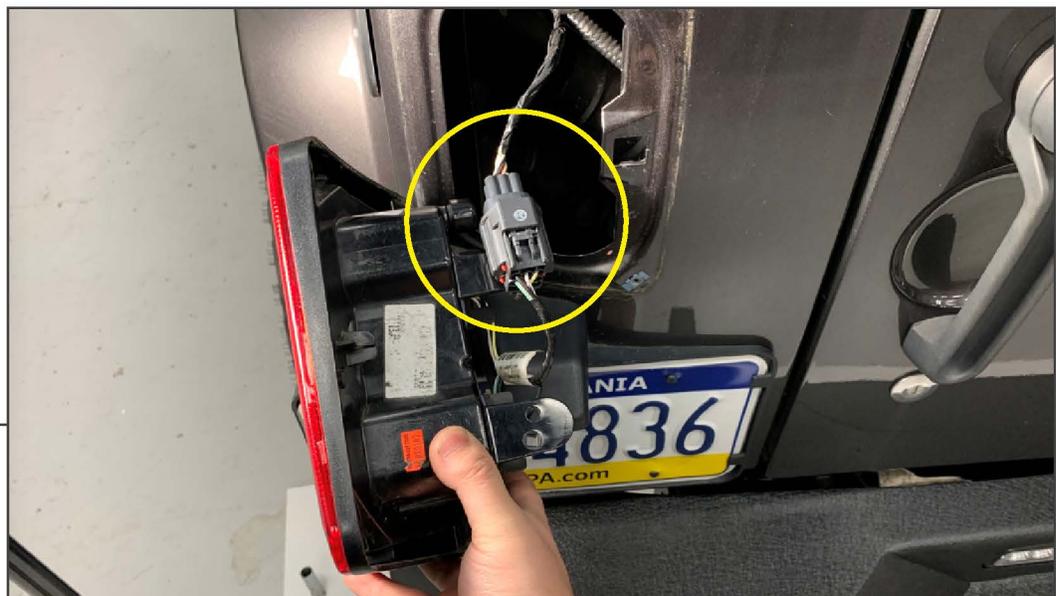

Unplug the (1) electrical connector from the tail light by pressing the plastic tab while separating the harnesses.

**STEP 3**



Clean the tail light mounting area of the vehicle using exterior detailer and a microfiber cloth. Allow the vehicle to fully dry.

**STEP 4**



Install the resistor bracket to the resistor using (2) Phillips bolts and (2) lock nuts, tighten until secure.



**STEP 5**

Secure the resistor & bracket to the inside of the vehicle body using (2) vampire clips. Then, fit the tail light to the vehicle, and secure using the original (2) Phillips screws.



**STEP 6**

Repeat Steps 1-6 for the remaining LED tail light.

Installation is now complete.