

WeatherTech®

Roof Basket

INSTALLATION INSTRUCTIONS

Parts Kit:

(8) Bolts

(8) Washers

(4) U-Clamps

(1) Hex L-Key

Torque Spec: 10 ft-lbs.

Measuring Tape*

*Not Included





Install Video



1


If the vehicle bars are **adjustable**, set to 28" apart for Roof Basket Large or XL or 38" apart for Roof Basket Large or XL with Length Extender. Then place the Roof Basket on the crossbars. If needed, move the adjustable supports so they are centered over the bar.

If the vehicle bars are **stationary**, place the Roof Basket on the roof of the vehicle so the adjustable supports lie on top of the crossbars. Then adjust the supports forward or backward until they're centered over the bar.

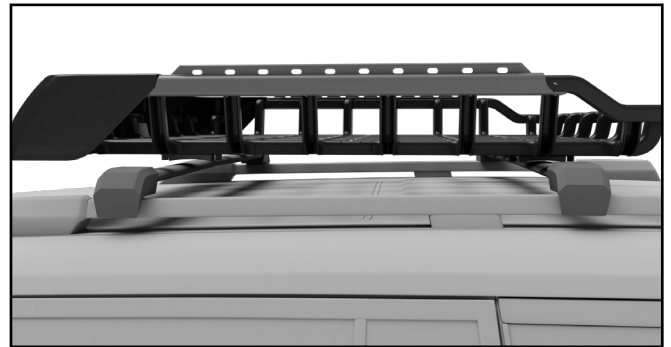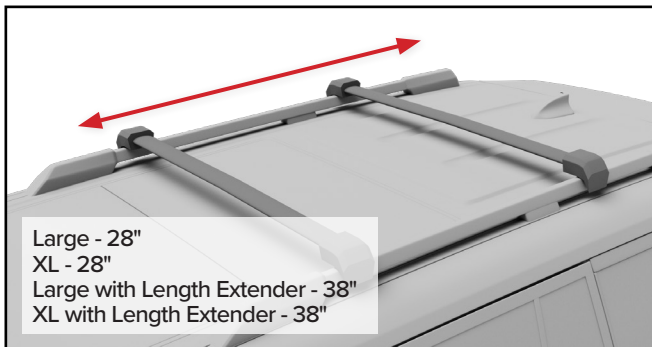


Note: Adjustable supports that sit on the same bar must be set to the same numbered hole. However, the numbered hole may vary from front bar to back bar.

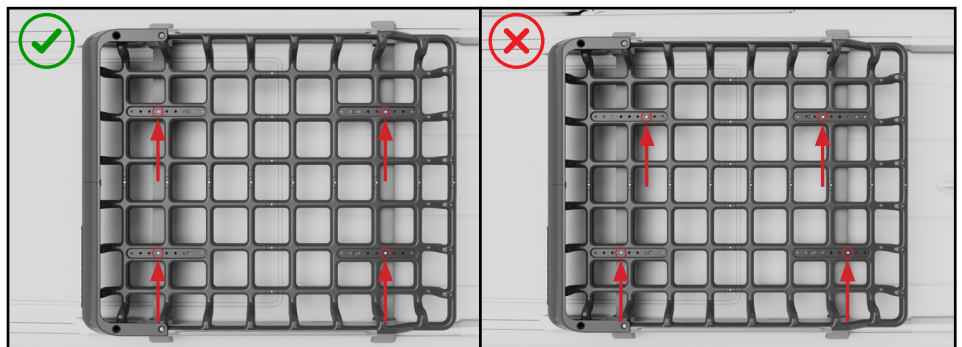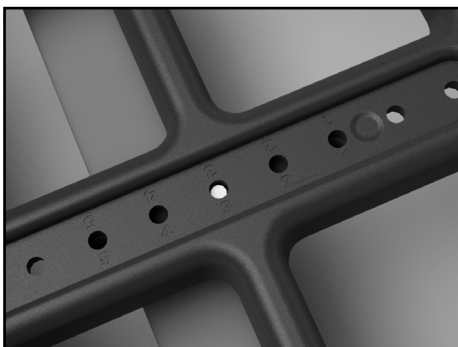

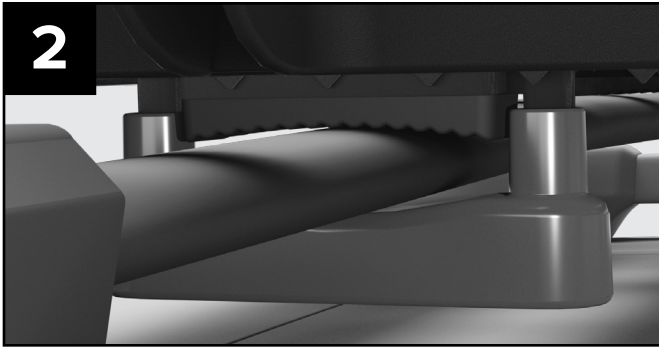

At each adjustable support, install a U-clamp below the vehicle crossbars.

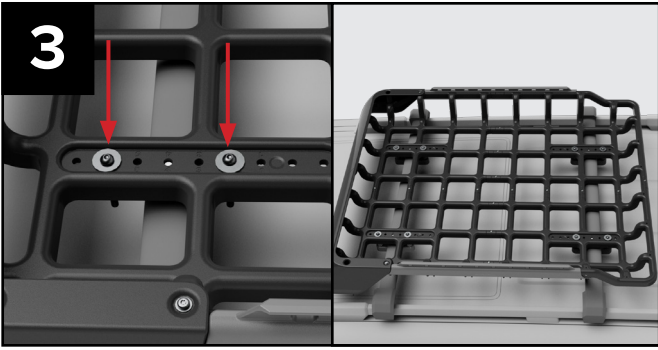

From the top, place (2) two bolts with washers into the holes to attach the U-clamp and tighten. Repeat for each adjustable support to secure the Roof Basket to the bars.



Congratulations! Your Roof Basket is now installed. Your Roof Basket carries a Lifetime Limited Warranty against defects in materials and workmanship when installed correctly.

Note: When securing cargo, use tie-down straps and loop around the crossbars on the vehicle roof, **NOT** the Roof Basket itself.



WARNING:
 TEST PRODUCT PLACEMENT AFTER THE FIRST 10 MILES TO ENSURE THE ROOF BASKET IS SECURE.
 CHECK YOUR VEHICLE MANUFACTURER'S ROOF WEIGHT LIMIT.

Note: Roof Basket weight varies by size.

Large	25 lbs.
Large with Length Extender	29 lbs.
XL	30 lbs.
XL with Length Extender	35 lbs.