



MADE IN THE USA

INSTALLATION MANUAL

JL Thin Profile Slider

2018-Present


SL-300-JL4/SL-301-JL4/SL-302-JL4



New Thin Profile Sliders for the JL Wrangler!

Part Description	Quantity
Sliders (Pair)	1
Slider Brackets	6
Rubber body trim	2
Optional 4 inch or 7 inch steps	4
Pinch seam plate brackets (Front)	4
Pinch seam plate brackets (Back)	4
HW Kit	1

Tools Required
Flat head screw driver or punch
Dead Blow Hammer
T50 Torx bit
1/2" socket
7/16" socket
Wrench with 3-4" Extension
Optional for quicker install:
Impact gun with adapters

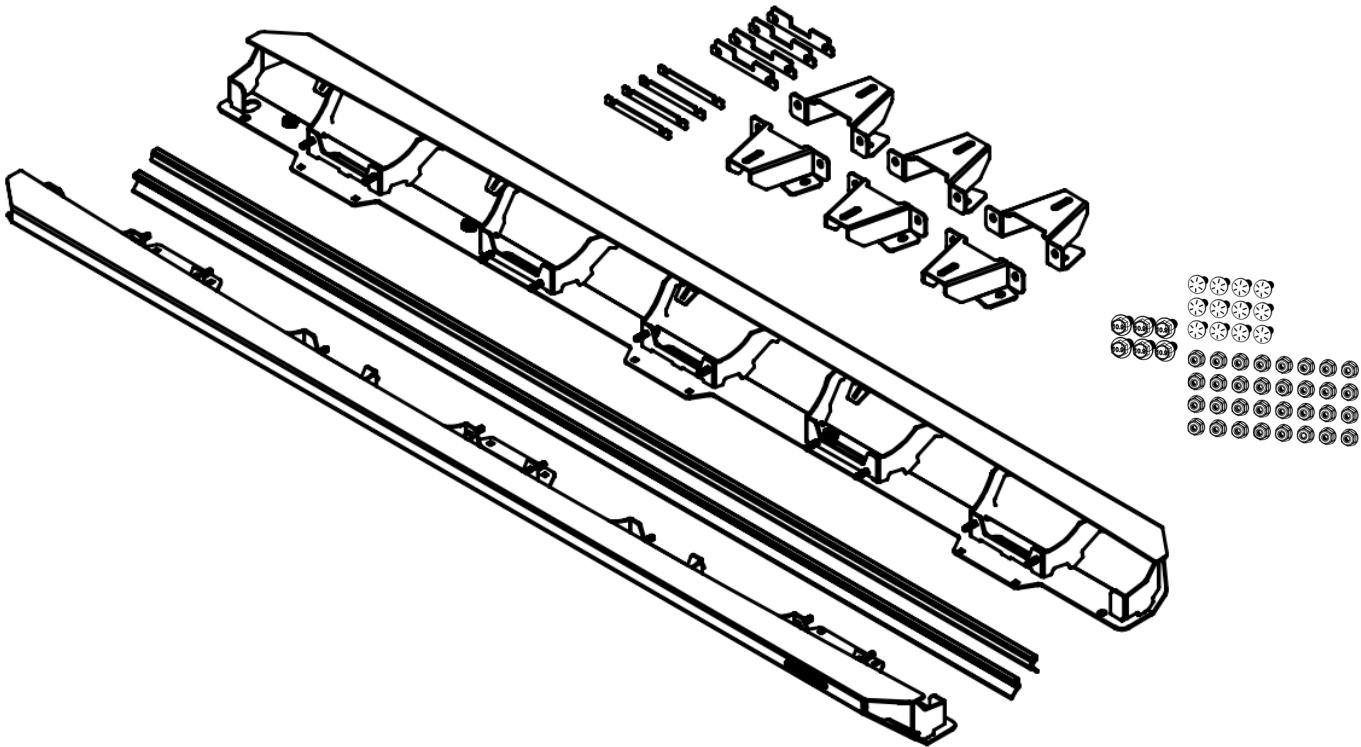

Scan this code to leave us a review!



Step 1

Remove factory installed sliders from the vehicle and set aside.


Step 2

Install the rubber seals onto both the driver and passenger side sliders. For ease of installation, use a screwdriver or punch to carefully open the U-channel in the rubber seal. Use a dead blow hammer to securely position the seal onto the sliders.



Step 3

Locate the four pinch seam plate brackets. Install two plate brackets on the driver side as shown below. Repeat the process on the passenger side.

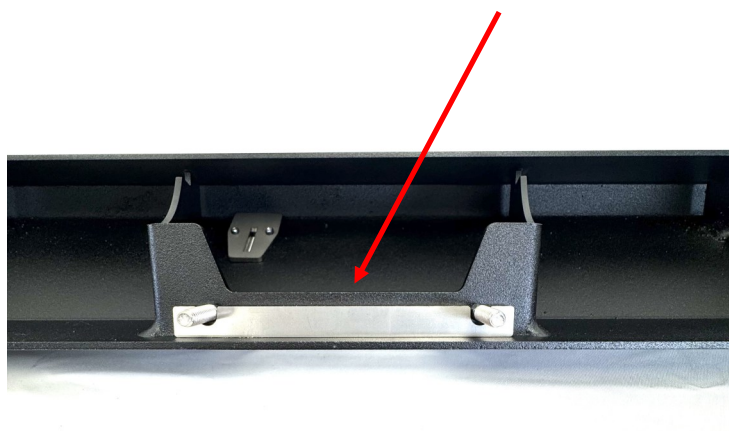


Step 4

Install the sliders onto the vehicle body, ensuring that all pinch seam bolts on the sliders align with and pass through the corresponding holes in the vehicle's pinch seam. Once all bolts are in place, attach the front, middle, and rear brackets. Secure the sliders and brackets to the pinch seam using the provided flanged nuts, as shown in the image below. Each bracket will require two nuts. Do not fully tighten the hardware at this stage.




Front, Middle and Rear Brackets

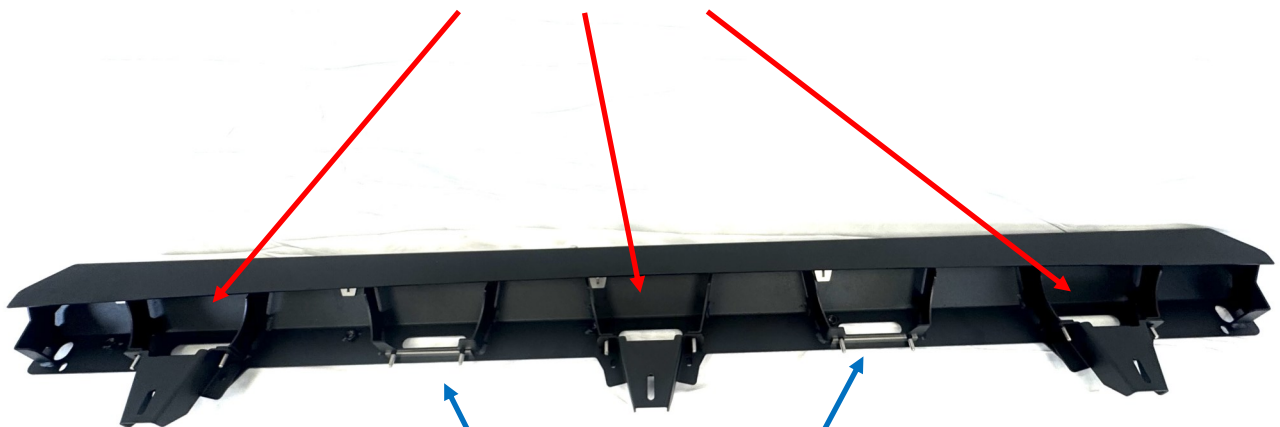

Pinch Seam Plate Brackets



Step 5

Next, install the provided silver bolts into the vehicle body at each bracket location. Then, insert two carriage bolts upward through each bracket and secure with the provided nuts. Do not fully tighten the hardware at this stage.

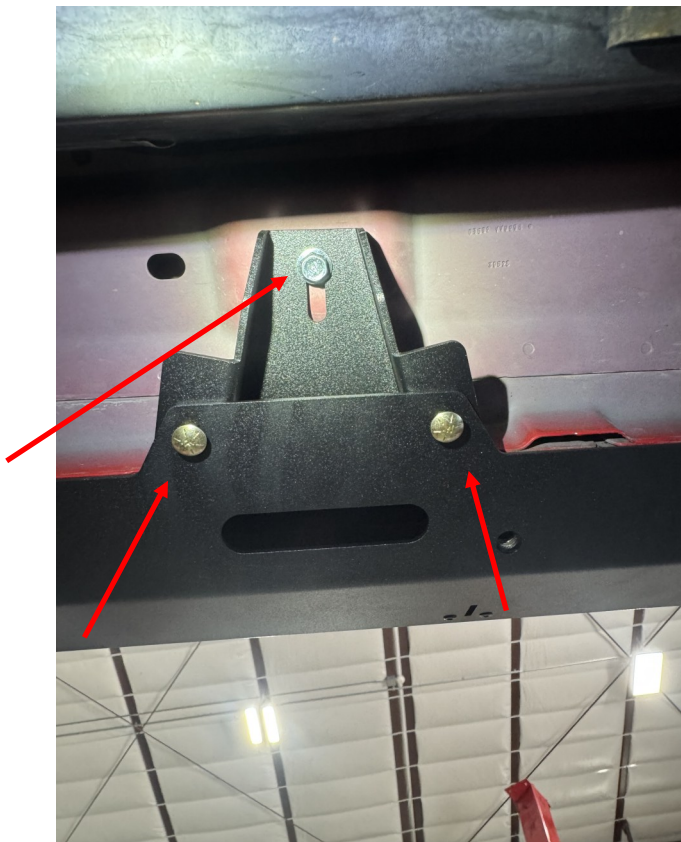

Step 6

For pinch seam bolts without brackets, install the pinch seam plates on the back side as shown below. Secure each plate using the provided nuts. There will be two plates per side. Torque all nuts to 20 lb-ft.

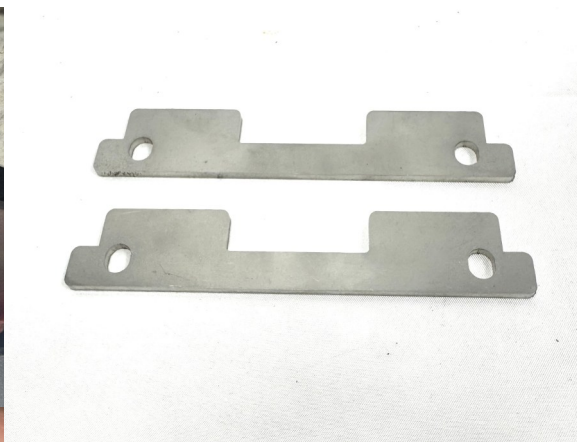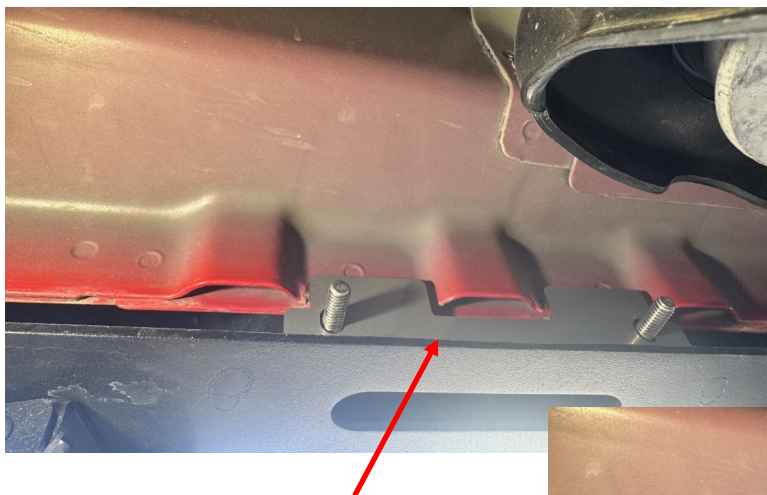


Step 7

With all bolts and nuts installed, proceed to fully tighten all hardware. Torque all bolts and nuts to 20 lb-ft, ensuring everything is securely fastened.

Step 8 -Optional

If installing the 4-inch or 7-inch step, insert the steps into the designated slots on the sliders. Once in position, pull upward until the step locks securely into place. Next, install two torx head bolts on the back of each step and tighten them until hand-tight.

Note: These bolts can be removed using the factory torx tool provided with all Jeep models.

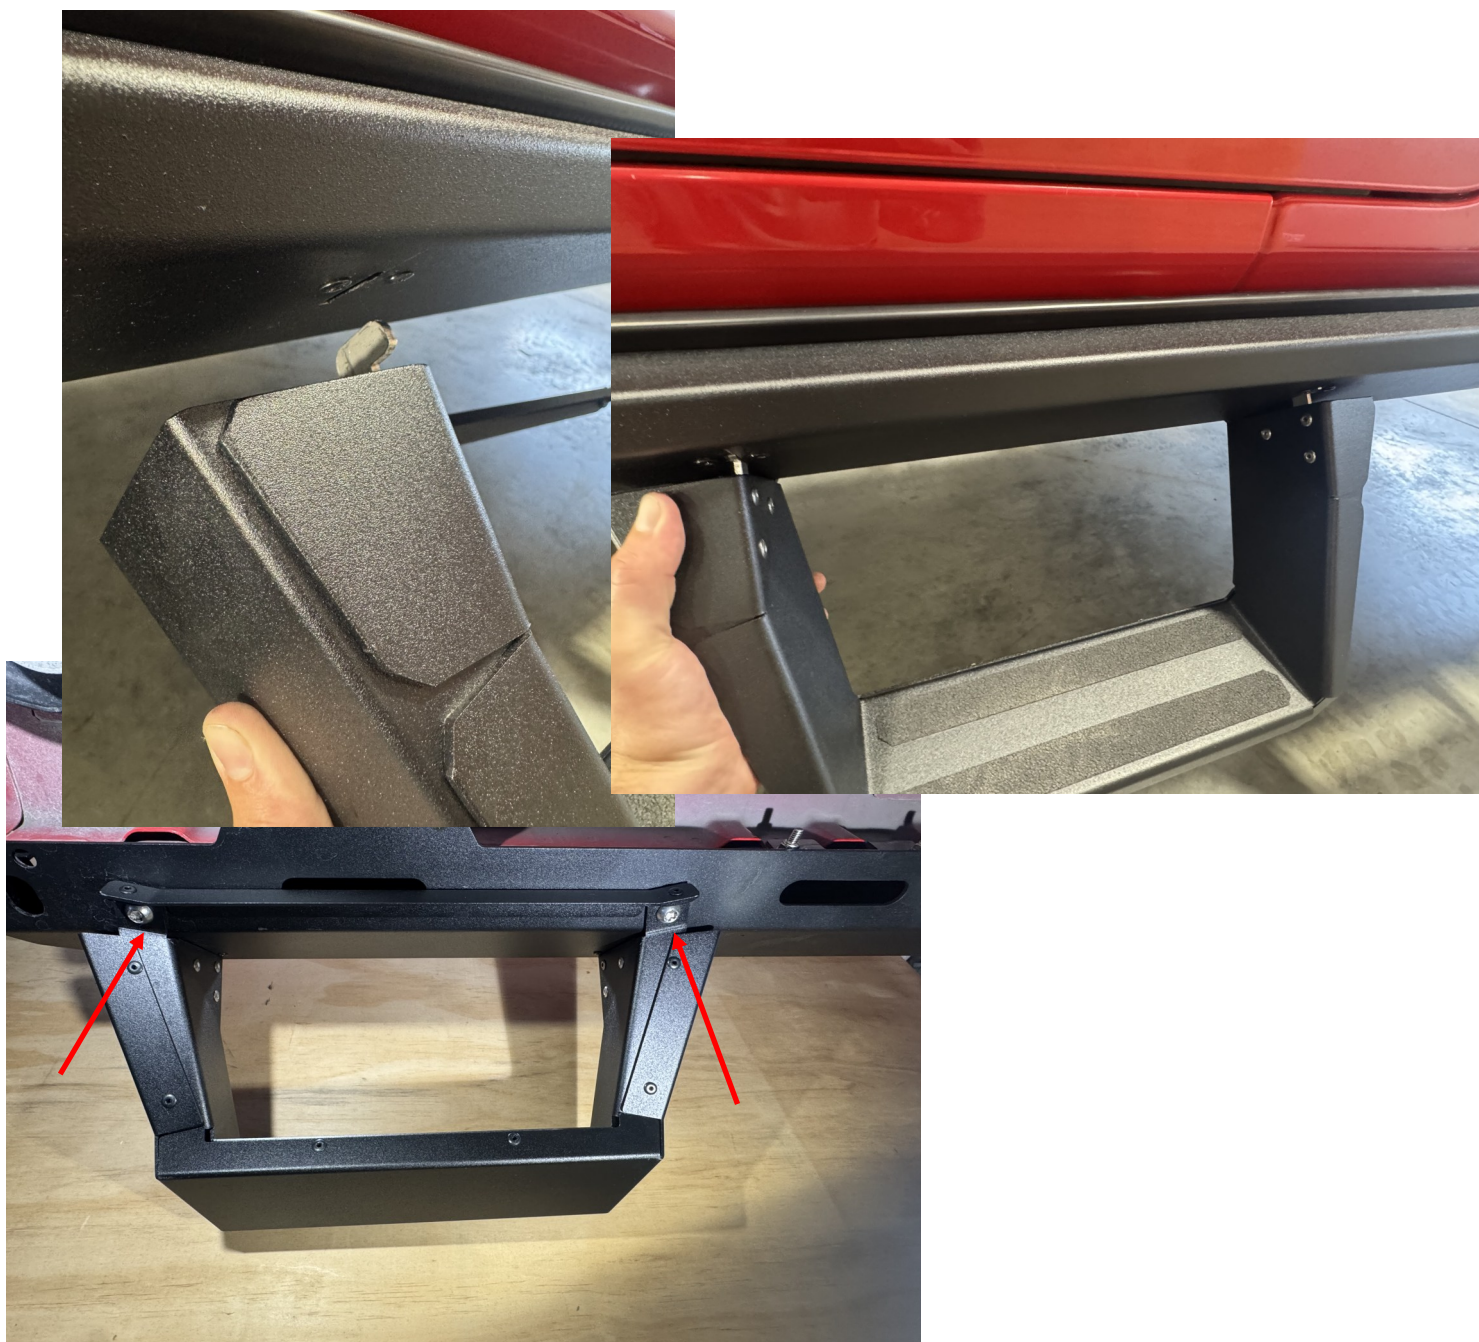

Installation is now complete!

WARRANTY POLICY

LIMITED TWELVE (12) MONTH WARRANTY FOR FINISH AND ELECTRICAL COMPONENTS

Rock-Slide Engineering, LLC (“RSE”) warrants to the original purchaser that (a) the structural and mechanical components of the Step Sliders will be free of defects in material and workmanship for the lifetime of the Step Sliders (the “product”), and (b) the finish (powder coat) and the electrical components (including the motor) will be free of defects in material and workmanship for a period of twelve (12) months from the original date of purchase. This warranty applies only to the original retail purchaser. Warranty is void if product was not purchased directly from R- SE or from an authorized RSE retailer or reseller. This warranty applies only with regard to the product as originally installed to the original vehicle. This warranty does not cover removal or reinstallation of the product.

To exercise this warranty and receive any warranty service, the original purchaser must provide RSE with proof of purchase and date of purchase that is acceptable to RSE, such as a copy of the original purchaser’s purchase receipt. The original purchaser must return the defective product to RSE along with a description of the problem, a copy of the original purchase receipt, the original bill of sale and all contact information (name, address, telephone number and email address). To begin the warranty process, the original purchaser must email RSE’s warranty department. During this warranty term, and upon the original purchaser’s valid exercise of this warranty, RSE shall, at its option, repair or furnish the replacement product in the event the original product is deemed by RSE to be defective. RSE’s sole liability shall be for repairing or replacing the product, but RSE may refund the purchase price at its sole discretion and option. The original purchaser is responsible for prepayment of all shipping and/or transportation charges with respect to the exercise of this warranty. The product may change without notice. In the event of a product change, RSE has no obligation to upgrade or modify any older generation product.

THE WARRANTY SET FORTH HEREIN IS THE ONLY WARRANTY COVERING THE PRODUCT. NO OTHER WARRANTY EXISTS, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE. No retailer, reseller, dealer, agent, or employee is authorized to make any modifications, extensions, amendments, or additions to this warranty.

This warranty shall be void in its entirety if RSE determines that the product installation was modified, changed, altered, customized or in any way used other than as instructed. Installation of the product without strictly adhering to the installation instructions shall void this warranty. Installation must be on the proper vehicle or warranty is void.

RSE SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES, UNDER ANY LEGAL THEORY AND/OR UNDER ANY CIRCUMSTANCE WHATSOEVER. IN ANY EVENT, ANY DAMAGES IN ANY SITUATION SHALL BE LIQUIDATED DAMAGES AND MAY NOT EXCEED THE RETAIL PRICE OF THE PRODUCT. RSE SHALL NOT BE LIABLE FOR ANY LOSS, DAMAGE OR INJURY DIRECTLY OR INDIRECTLY ARISING FROM THE USE OF OR INABILITY TO DETERMINE THE USE OF THE PRODUCT. THE ORIGINAL PURCHASER IS RESPONSIBLE TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, PRIOR TO USING THE PRODUCT, AND THE ORIGINAL PURCHASER ASSUMES ALL RESPONSIBILITY AND RISK IN CONNECTION THEREWITH.

For questions or concerns: please contact our office at 435-752-4580 and ask for the warranty department or email us at warranty@rockslideengineering.com.