

# Jeep

---




## STEP 13

Fold down and latch the rear seat. Then, push the rear seat belt buckles through the seat bottom to complete the seat cover installation.

### CARE INSTRUCTIONS:

- Clean using a damp cloth or sponge.
- Machine wash separately on gentle cycle in cold water with mild detergent.
- Air Dry Only.

## STEP 11

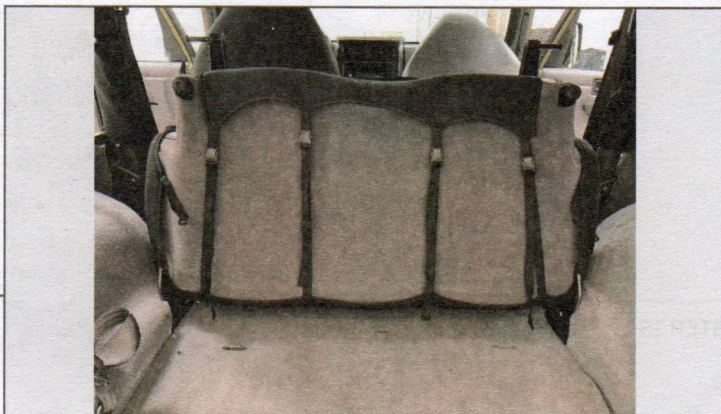


Install the cover over the seat bottom. Push the straps through the seat back and loop them under the seat. Reconnect the straps under the seat. It is helpful to fold the seat up during this process.

## STEP 12




Pull the elastic hooks around the sides of the seats and hook them onto the center (2) straps.

## STEP 9

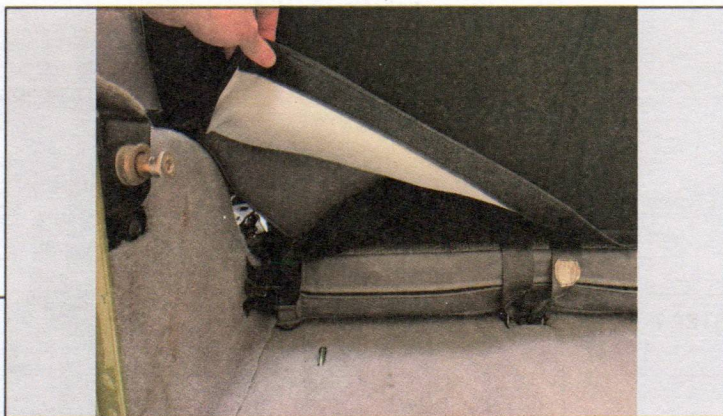

Install the seat back cover over the top of the seat. Pull the cover down the seat. Push the soft portion of the seat cover through the seat towards the back of the vehicle. Pull the soft portion up the back of the seat and attach it to the back side of the seat cover.

## STEP 10

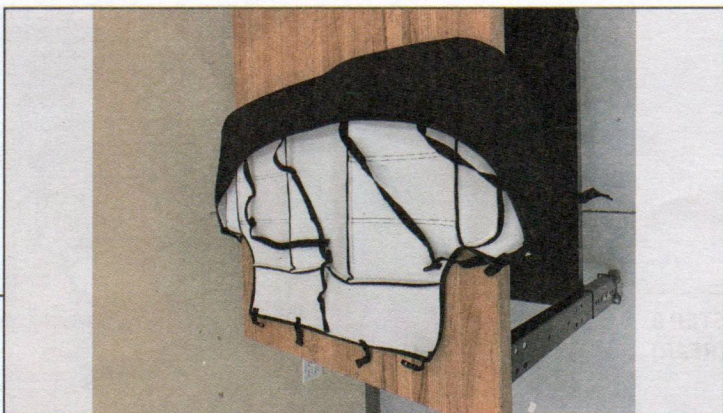

Identify rear seat bottom. Unclip the straps.

## STEP 7




Installation is now complete on the front seat. Repeat the process on the other front seat.

## STEP 8 (REAR)




Begin the install by identifying the rear upper seat back. Separate the bottom of the cover.

## STEP 5

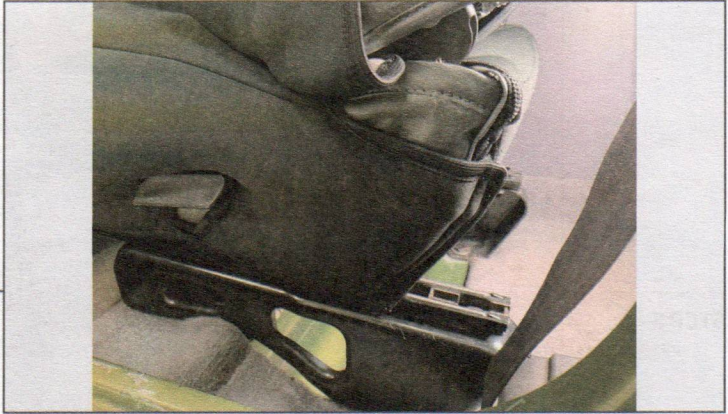


Place the bottom cover over the seat. Push the straps through the back of the seat and loop them under the seat bottom. Position the seat lever through the hole in the cover. Wrap the hook and loop portion of the bottom cover around bottom of the seat and attach.

## STEP 6

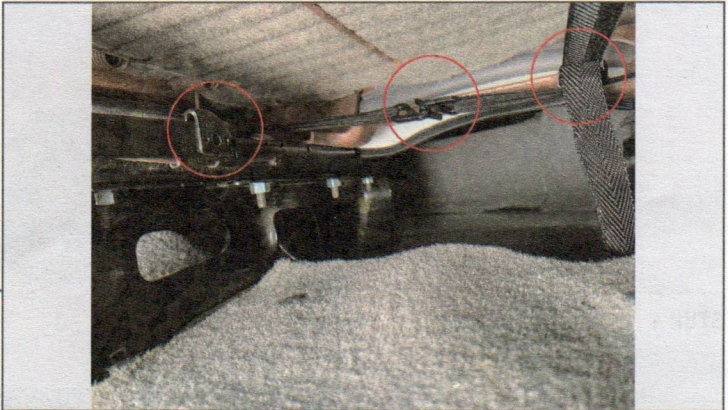

Reconnect the straps under the seat. Pull the straps tight. Wrap the elastic hooks under the seat ensuring that they are located above the seat slider. If the elastic hooks are placed under the slider they may get damaged by the slider.

## STEP 3

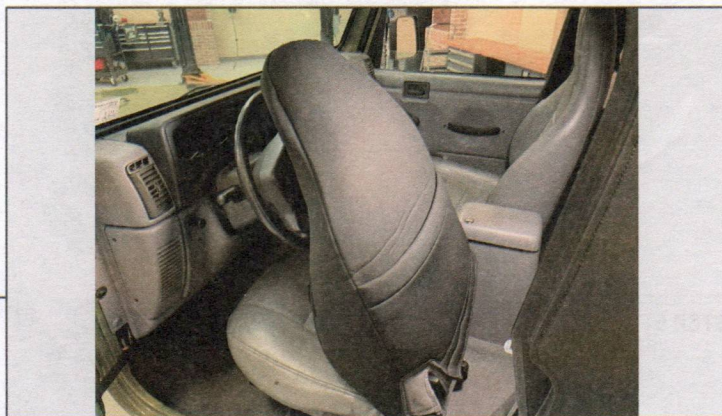

Pull the soft portion of the seat cover from Step 2 up the back of the seat and secure it to the back of the seat cover.

## STEP 4



Identify the front lower seat bottom. The hole is for the recline lever on the seat. Unclip the straps on the under side of the cover.


# Jeep

---



## STEP 1 (FRONT)

Begin the install by identifying the front upper seat back. The sewn in slit on the side bolster faces the exterior of the vehicle. Separate the bottom of the seat back.

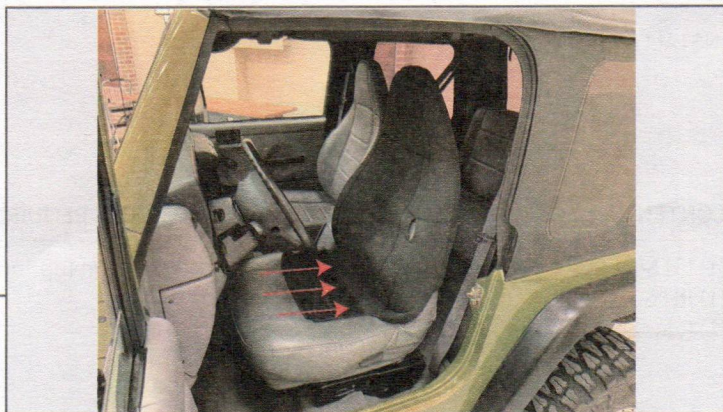

## STEP 2

Install the seat back cover over the top of the seat. Pull the cover down the seat. Push the soft portion of the seat cover through the seat towards the back of the vehicle.

# Jeep®

---

## NEOPRENE SEAT COVERS

(1991-1995 WRANGLER YJ)

---

### INSTALLATION INSTRUCTIONS

#### CONTENTS

---

(1) LH Seat Set  
(1) RH Seat Set  
~~(1) Rear Seat Set~~

#### TOOLS REQUIRED

---

Vacuum (optional)

SKU # :

J258862