



STEP 17

Reconnect the straps from the front of the seat cover to the straps on the rear of the seat cover. Tighten the straps for desired fit.



STEP 18

Latch the elastic hooks from each side of the seat cover together.



STEP 19

Slide the headrest cover over the headrest to complete this portion of the rear seat.



STEP 20

If equipped with a center arm rest, fold down the armrest and remove the headrest by depressing both tabs on the headrest posts.



STEP 21

Locate the smallest remaining headrest cover. Insert the headrest posts through the cover, then wrap the cover around the headrest.




STEP 22

Identify the large rear upper seat back. Unzip, and separate the top and bottom portions of the seat cover.



STEP 15

Continue to pull the soft portion of the cover from step 14 around the seat back. Attach the soft portion of the seat cover to the back side of the seat cover.

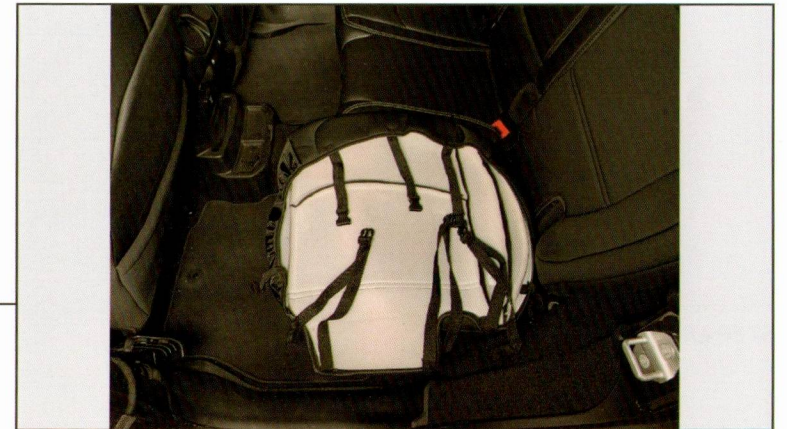

STEP 16

Identify the smaller portion of the seat bottom. Disconnect the straps. Feed the straps through the seat back and under the seat.



STEP 13



Slide the seat cover over the seat back. Tuck the center section of the cover through the headrest posts. Connect the hook and loop on the top of the seat cover.

STEP 14



Wrap the soft portion of the upper seat cover through the seat. Folding the seat forward allows for more space between the seat back and seat bottom.




STEP 23



Slide the cover over the upper seat back. Install the seat cover under the seat belt as shown by passing the cover behind the seat belt.

STEP 24

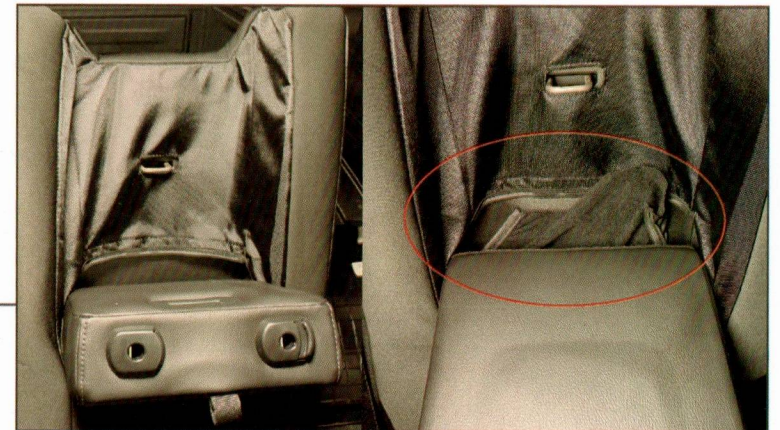

Pull the armrest through the seat cover. Wrap the soft portion of the cover behind the armrest and reattach it to the cover.




STEP 25

Tuck the center section of the cover through the headrest posts. Connect the hook and loop on the top of the seat cover.



STEP 26

Wrap the soft portion of the upper seat cover through the seat. Folding the seat forward allows for more space between the seat back and seat bottom.

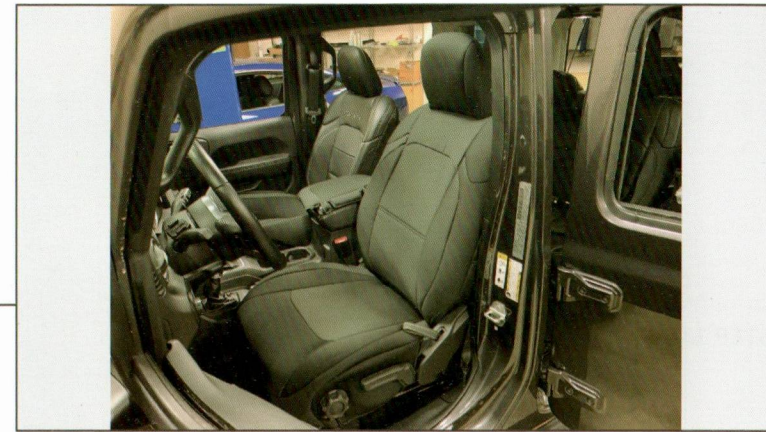

STEP 11

Reinstall the headrest and follow the same procedure for the passenger seat.



STEP 12 (Rear)


This install guide illustrates the installation of rear seat covers on a vehicle with the center fold down armrest. Not all JL's have the same rear seat, this is for guidance on other seat configurations, not all of the steps will be the same.

Begin the rear seat cover installation by identifying the small half of the upper seat back. Separate the cover at the top and bottom.



STEP 9

Route the side straps under the seat by feeding them through the gap between the seat bracket and the slider. Location will vary from side to side. Ensure the strap is above the seat slider otherwise the slider may damage the strap.

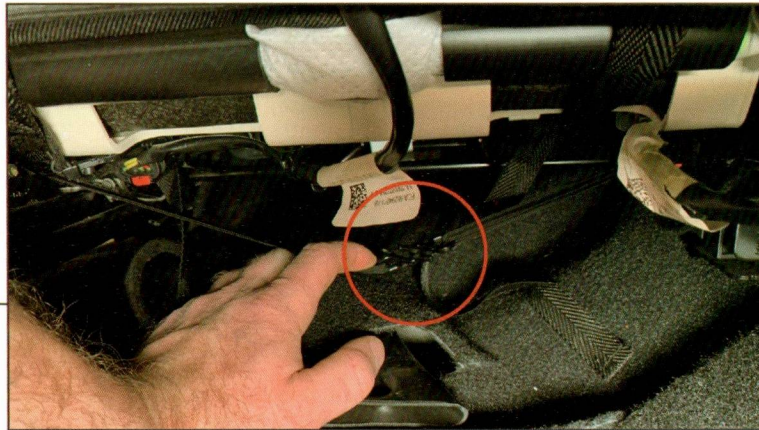

STEP 10

From under the seat, hook both side straps together.



STEP 27

Carefully zip the seat back together. Then, continue to pull the soft portion of the cover from step 26 around the seat back. Attach front and rear portions together.



STEP 28

Identify the armrest cover. Separate the front and back.



STEP 29



Wrap the soft portion of the armrest around the armrest.

STEP 30



Reattach the soft portion of the armrest cover to the back of the armrest cover. Pull the pull loop through the front of the armrest cover.




STEP 7



Identify the driver side lower seat cover by locating the hole for the seat adjuster. Disconnect the straps. Install the seat cover over the seat bottom. Push the straps through the seat back.

STEP 8

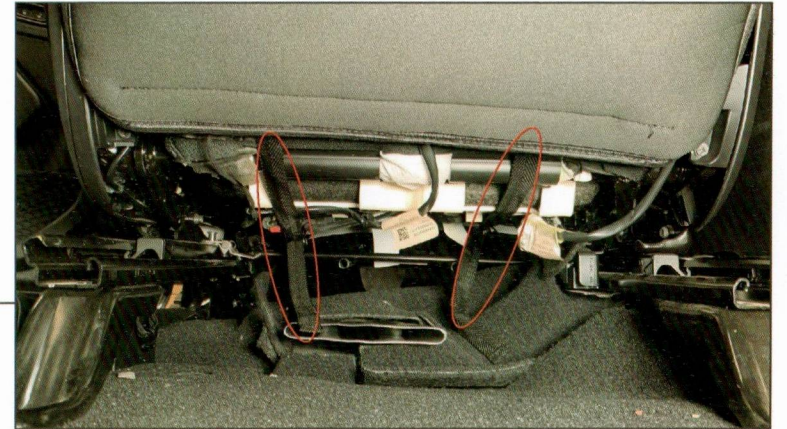

Route the straps under the seat so that they do not interfere with any of the seat cables or wiring. Reconnect the straps and then tighten them as desired.



STEP 5



Wrap the soft portion of the upper seat cover through the seat back. **Note: Folding the seat forward allows for more space between the seat back and seat bottom.

STEP 6



Fold the seat back bottom from Step 4 under the seat cover. Then pull the soft portion of the seat cover from Step 5 up the back of the seat and attach the front and rear portions of the seat cover together.



STEP 31



Install the headrest covers to complete the upper seat back.

STEP 32



Identify the larger portion of the seat bottom. Disconnect the straps. Feed the straps through to the backside of the seat.




STEP 33

Reconnect the straps from the front of the seat cover to the straps on the rear of the seat cover. Tighten the straps for desired fit.



STEP 34

Latch elastic hooks from each side of the seat cover to one of the center straps.

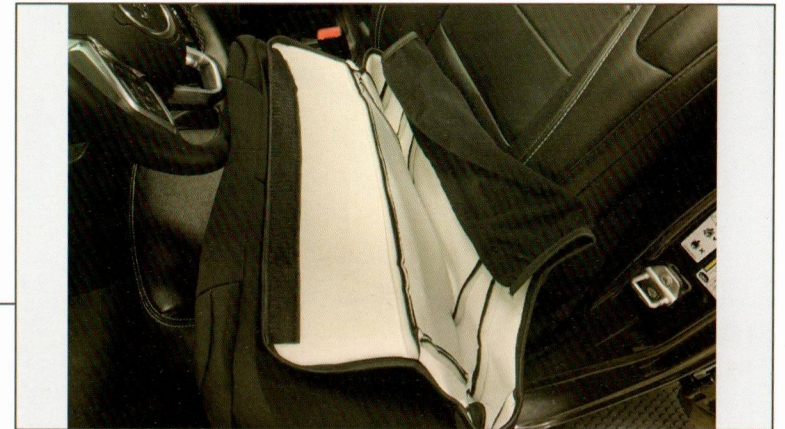

STEP 3

Identify the correct seat back cover by locating airbag flap. The flap will face the outside of the vehicle. Then separate the base of the cover and slide it half way down the seat back.



STEP 4

From the back of the seat, unhook the elastic on the bottom of the seat back from under the seat.



STEP 1 (Front)

Begin the installation by thoroughly vacuuming all the seats. Then remove the headrests by depressing the plastic retainers on the base of each headrest post. Pull the headrest out of the seat.



STEP 2

Install the headrest cover over the factory headrest. The tag on the cover will face the rear of the vehicle. Attach the center together then the sides.



STEP 35

Pull the seat belt receivers through the cover to complete the installation.

CARE INSTRUCTIONS:

- Clean using a damp cloth or sponge.
- Machine wash separately on gentle cycle in cold water with mild detergent.
- Air Dry Only.



NEOPRENE SEAT COVERS

(2018-2024+ WRANGLER JL)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Seat Set
- (1) RH Seat Set
- ~~(1) Rear Seat Set~~

TOOLS REQUIRED

Vacuum (optional)

SKU # :

J258871-B

B