raxiom
advanced lighting solutions

LED TURN SIGNAL

(2007-2018 WRANGLER JK)

INSTALLATION INSTRUCTIONS

CONTENTS


(1) LH Turn Signal
(1) RH Turn Signal

TOOLS REQUIRED

Panel Removal Tool
Flathead Screwdriver

SKU # J272428

STEP 1

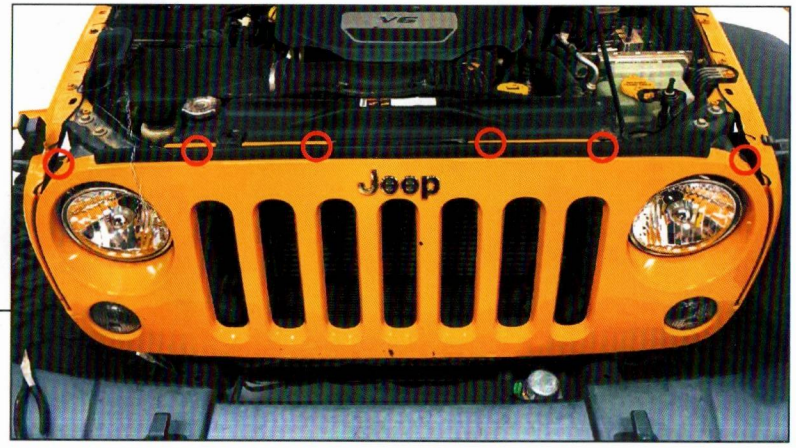

Open the hood. Remove (6) plastic push clips using a panel removal tool.

STEP 2



Firmly pull the bottom of the grille away from the vehicle to dislodge the lower clips on the grille. Unplug the turn signal harnesses from the lights by sliding the red lock back on the connector, and then press the black connector tab to release the connector.

Remove the grille from the vehicle. Set the grille on a soft workable surface.

raxiom
advanced lighting solutions

STEP 3



Using a flathead screwdriver, push in the (2) locking tabs holding the turn signal housing into the grille. Once unclipped, push the fog light housing through the front of the grille.

Repeat this procedure to the opposite side turn signal housing.

STEP 4



Install the LED turn signal by pushing the light housing through the front of the grille until the tabs latch into place. Plug the vehicle harness into the LED turn signals, then repeat Steps 1-2 in reverse order to reassemble the grille to the vehicle.

Installation is now complete.