

LED TAIL LIGHTS

(2020-2023+ GLADIATOR JT)

INSTALLATION INSTRUCTIONS


CONTENTS

- (1) LH Tail Light
- (1) RH Tail Light
- (2) Resistor Brackets
- (4) Resistor Bracket Clips
- (4) Machine Screws
- (4) Machine Screw Nylon Nuts

TOOLS REQUIRED

- Phillips Head Screwdriver
- Pliers
- 8mm Socket
- Socket Wrench

STEP 1

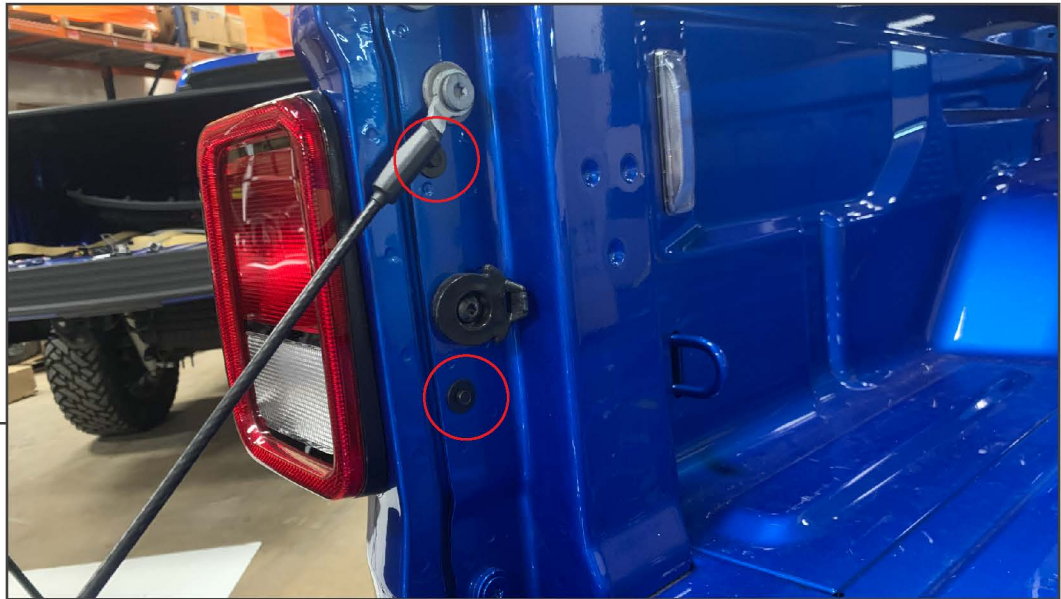


Lower the tailgate to access the tail light bolts. Using an 8mm socket, remove the (2) bolts securing the tail light to the vehicle.

STEP 2




Using a soft pry tool, depress the tab on the factory light while pulling the light towards the rear of the vehicle.

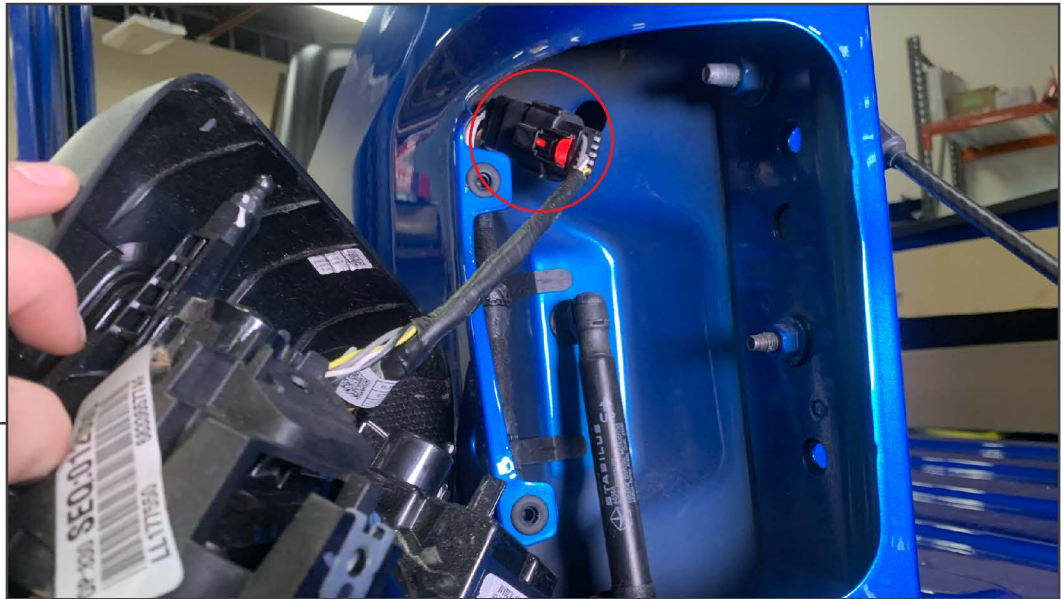

STEP 3


Slide the red lock tab back. Depress the tab on the electrical connector while pulling the connectors away from each other.

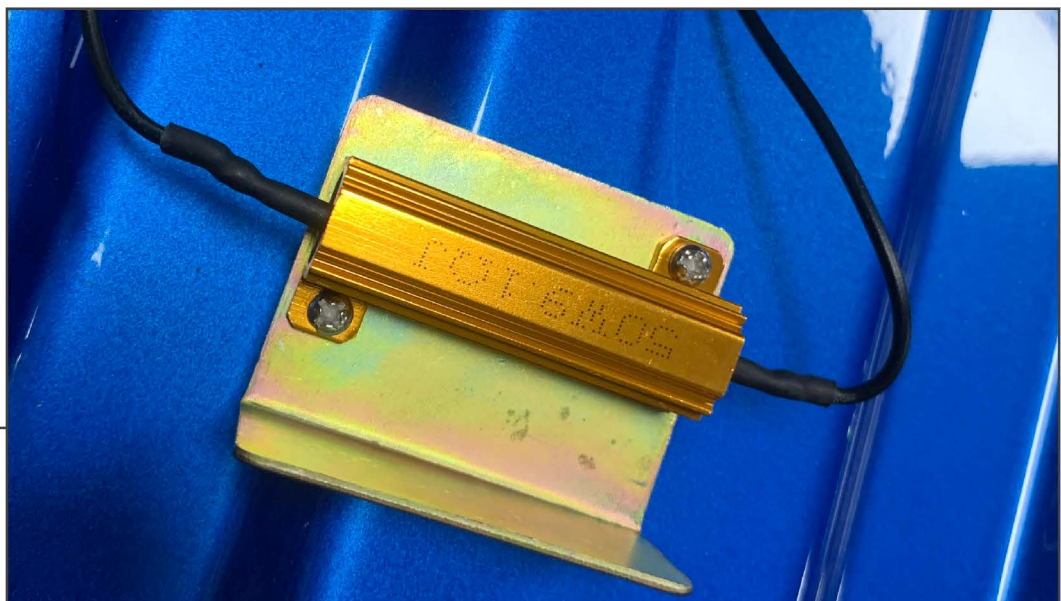

STEP 4


Mount the resistors to the resistor brackets using the supplied hardware. Hold the nylon nut with pliers while tightening the screws with a Phillips head screwdriver.

STEP 5

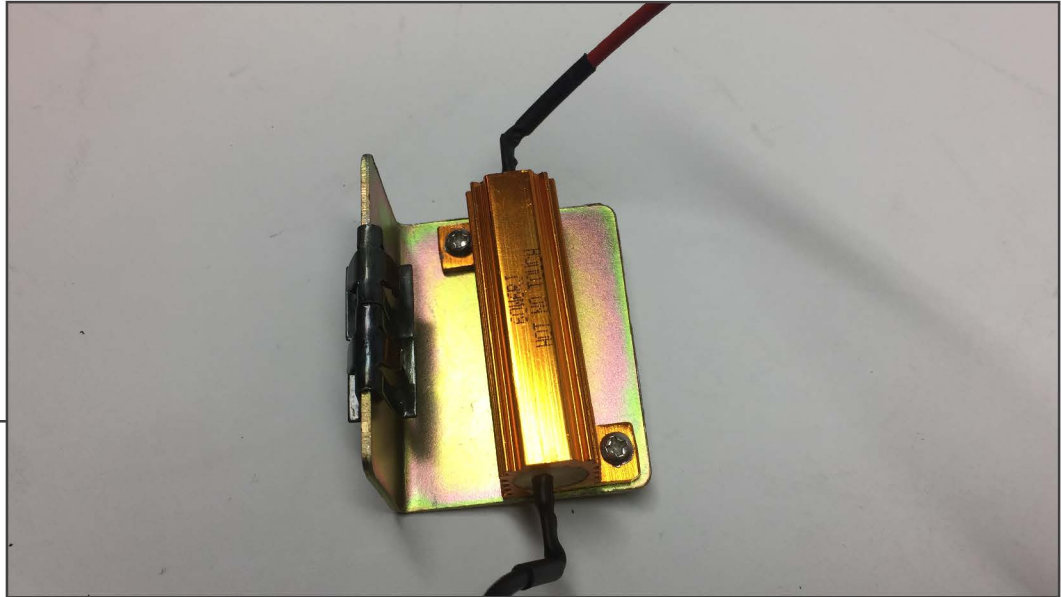

Using (2) clips per side, clip the resistor bracket to the vehicle.

STEP 6

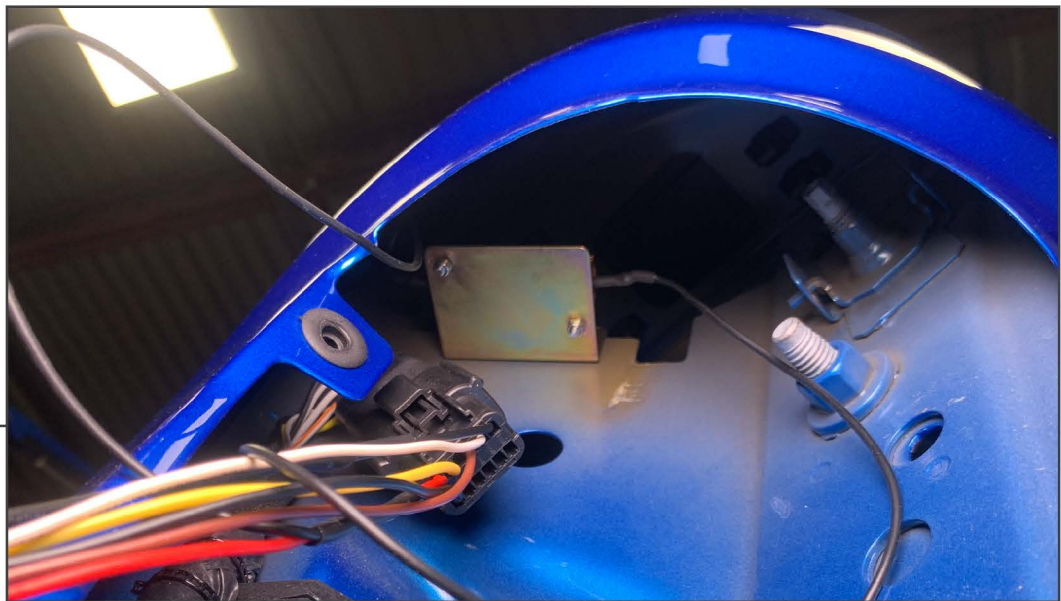

Plug in the tail light, push the light into the vehicle. Secure the light to the vehicle using the factory hardware.



STEP 7

Repeat steps 1-6 to the opposite side of the vehicle.

Installation is now complete.