

Installation Instructions

Description: BUMPER FOR WRANGLER JK, JL, & Gladiator JT


#	Description	Qty	Specification	#	Description	Qty	Specification
①	bumper	1		④	Spring washer	4	D10
②	Hexagon head bolt	4	M10*40	⑤	Spring washer	8	D12
③	Hexagon flange nut	8	M12	⑥	Enlarged washer	4	D10



Installation Steps:

- 1: Check if the accessories are complete
- 2: Install the fixed plate to the pump with hexagon head bolts(M10*40).
- 3: Remove the surrounding and horizontal bars of the original car.
- 4: Use nuts to install the pump into the car.
- 5: Tighten all the bolts.

Picture 1

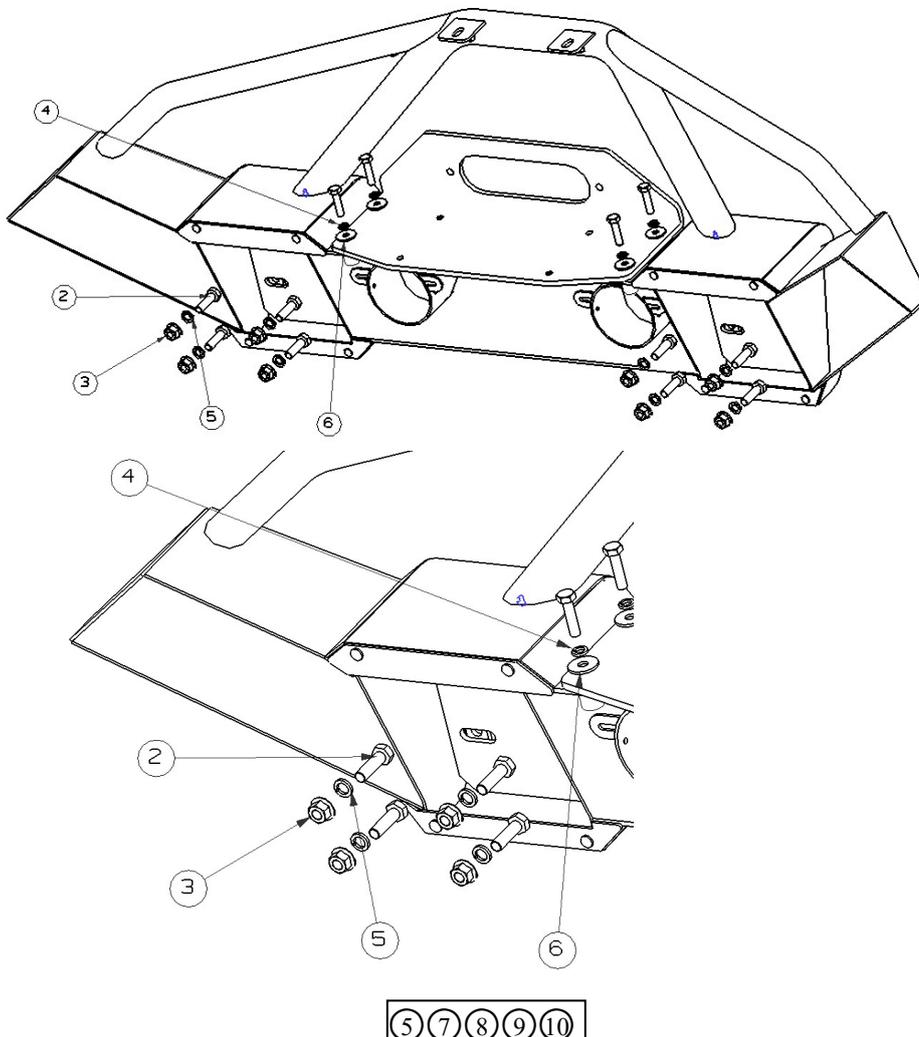

Picture 2

