

-NOTICE-

**IF YOUR JT GLADIATOR IS EQUIPPED WITH:
BACKUP SENSORS **AND/OR** LED LIGHT PACKAGE**

YOU WILL NEED TO GATHER THE FOLLOWING MOPAR PARTS:

For LED License Plate Lights:

- (QTY 1) 6KM23RXFAA - License Plate Lamp Bezel, Left
- (QTY 1) 6KM22RXFAA - License Plate Lamp Bezel, Right
- (QTY 1) 6TB07RXFAA - License Lamp Bracket, Left
- (QTY 1) 6TB06RXFAA - License Lamp Bracket, Right

For Backup Sensors – You will need (Viewing Perspective is from **Outside**):

- (QTY 1) 6MH85RXFAC - Parking Distance Bezel – Outer Left
- (QTY 1) 6MH83RXFAB - Parking Distance Bezel – Center Left
- (QTY 1) 6MH82RXFAB - Parking Distance Bezel – Center Right
- (QTY 1) 6MH84RXFAB - Parking Distance Bezel – Outer Right
- (QTY 1) 68295603AC - Sensor Mounting Bracket – Outer Left
- (QTY 1) 68295601AC - Sensor Mounting Bracket – Center Left
- (QTY 1) 68295600AC - Sensor Mounting Bracket – Center Right
- (QTY 1) 68295602AC - Sensor Mounting Bracket – Outer Right

INSTALLATION INSTRUCTIONS

PART No.

FB22149

**Jeep JT Gladiator
Mako Rear Bumper**



VIDEO AVAILABLE



REQUIRED TOOLS

- 18mm Socket
- 8mm Socket
- 4mm Allen

KIT CONTAINS

- JT Gladiator Mako Rear Bumper
- D-Rings
- M12 Hex Nut
- M12 Washer
- M12 Lock Washer
- M12 Counter Sunk Bolts
- M6 Button Head Bolts
- M6 Flat Washers
- M6 Lock Washers

QTY

- 1
- 2
- 6
- 6
- 6
- 2
- 4
- 4
- 4

Jeep JT Gladiator Mako Rear Bumper

1) REMOVE YOUR EXISTING BUMPER

Remove your existing rear bumper according to the manufacturer's instructions. We show how to remove your factory bumper in another video on our website www.FishboneOffroad.TV



If your model has sensors, remove them in order, left to right, one through four.



2) PREPARE YOU NEW BUMPER FOR INSTALL

With the Mako aside, reinstall your trailer wiring plug and license lights into it. If your vehicle has LED License Plate Lights, you will instead need to use the LED brackets and bezels listed above.




If your model has sensors, you will need to reinstall them into the Mako using the required Sensor brackets and bezels listed above, ensuring the each sensor returns to their 'one through four' factory location.



Jeep JT Gladiator Mako Rear Bumper

Remove the factory license plate clip nuts from the JT Gladiators frame.

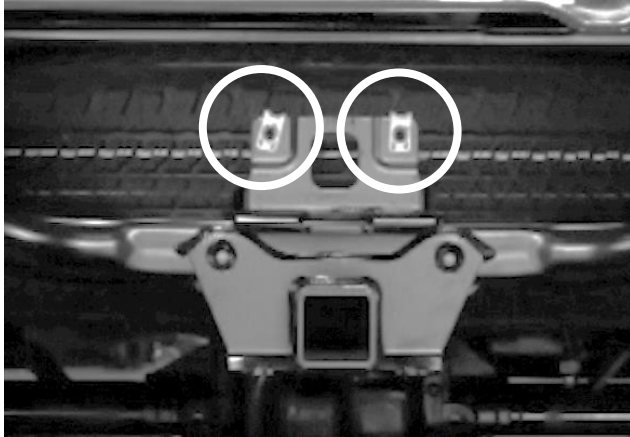

With the included tapered bolts, washers, lock washers, and nuts, secure the center of the bumper to the center frame mount.

4) RECONNECT THE WIRES

With your bumper in place, reconnect your trailer wiring, license plate light wiring, and the sensor plug harness.



3) INSTALL YOUR MAKO BUMPER

Slide the Mako into the frame mounting holes.



With the included flat washers, lock washers, and hex nuts, secure the bumper to the left and right frame mounts with an 18mm Socket.



5) REINSTALL YOUR LICENSE PLATE

With the included button head bolts, washers, and 4mm Allen, secure your license plate to the center of the bumper



6) INSTALL D-RINGS



**ENJOY YOUR NEW FISHBONE
OFFROAD JT MAKO REAR BUMPER!**

