



TURBO AIR AC VENT W/ AMBIENT LIGHT FOR JEEP WRANGLER JL/JT



1
Disassemble all cover plates in sequence. Be careful not to damage the panel during removal. (Figure 2 3 4 5)



2
Remove the other parts.



3
Remove the other parts.



4
Remove the other parts.



5
2 screws need to be removed from the lower cover plate of the storage box.



6
Then you can see the corresponding letter "LHO".



7
Remove the original air conditioning vent.



8
Remove the silver fixing ring on the original air conditioner vent and install it on the new air conditioner vent.



9
Install to the corresponding LHC/LHO/RHC/RHO. Tighten the screws in turn. (Pay attention to the correct installation direction)




10
As shown, insert the control gas line from the corresponding position.



11
And then pull out the line from the other side. Be careful not to get the lines stuck when pulling.



12
Insert the line of the control box from the bottom.

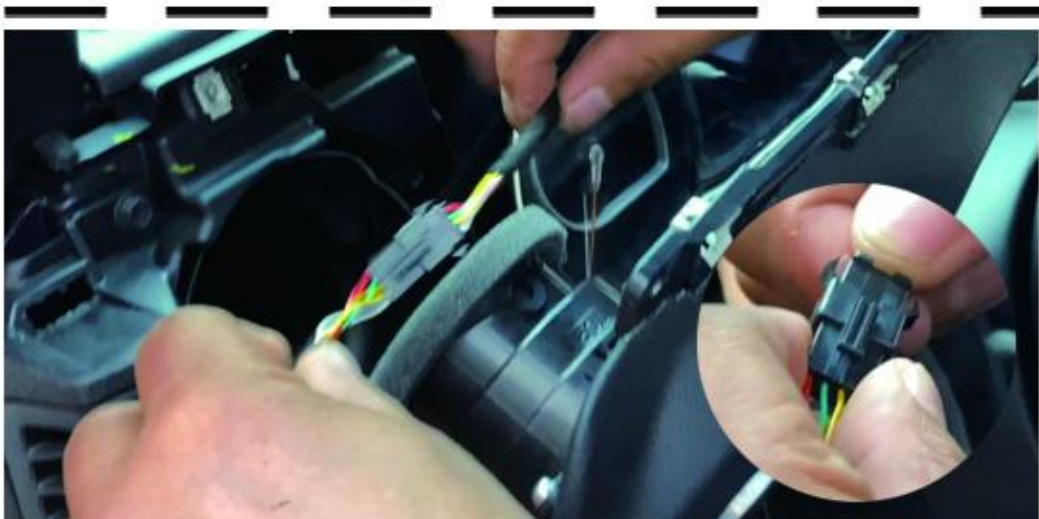

13
There are 4 control plugs. Connect them to the plugs of the four air conditioning vents.



14
Install the panel on. Tighten and fix with screws.



15
When installing the right side panel, Connect the airbag plug (yellow one)



16
Install the two screws inside the storage box.



17
Reinstall all panels one by one. As shown, press to install the panel.



18
Install the armrest and fix it with screws.




19
Press the strip panel and fix it with screws. Then install the panel from top to bottom.



20
As shown, press to install the panel. Fix it with screws.



21
Then install the panel from top to bottom.

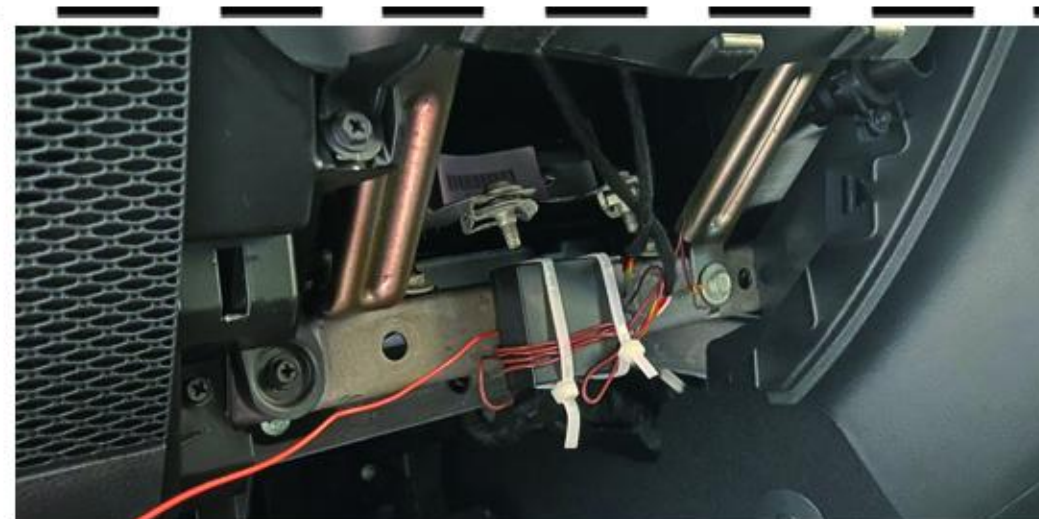

22
Fasten the control box in place.



23
Thread the controller wire in from the bottom.




24
Select the desired position and stick the switch on the panel.




25
Connect Negative line.



26
Run the red line through the hole to the ACC Fuse box.

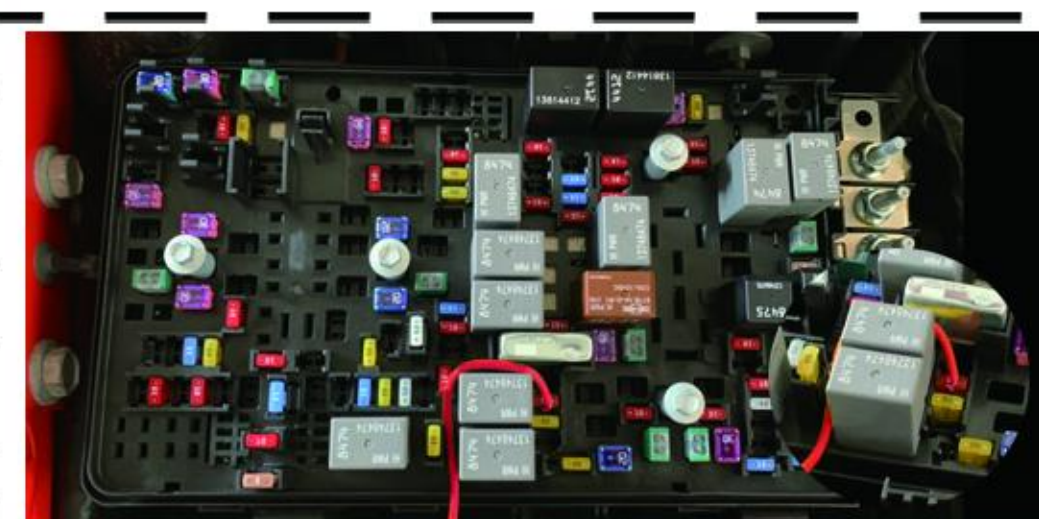

27
Connect the ACC line to the Fuse box.

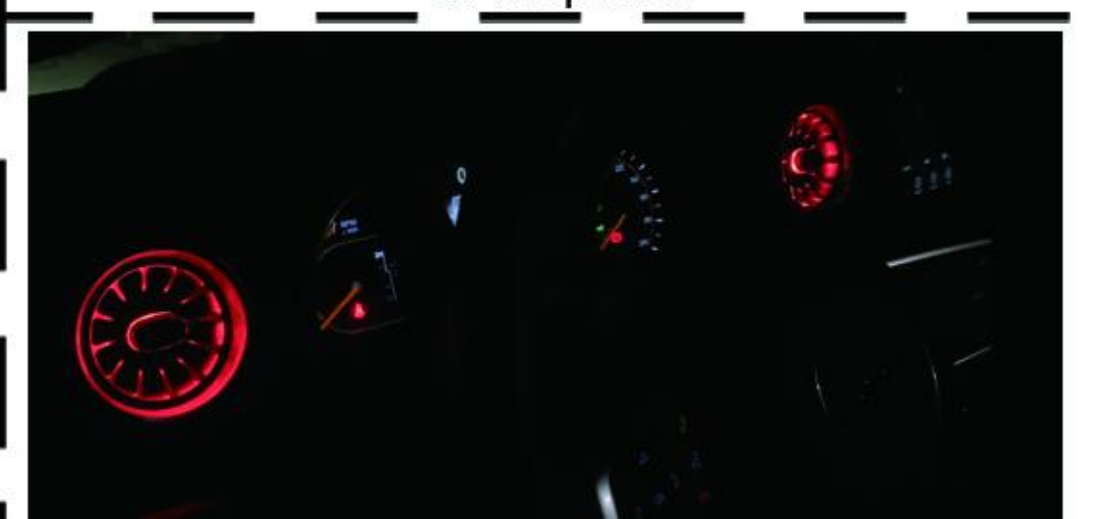

28
The effect of opening at night after installation.