

LOW PROFILE LED TAIL LIGHTS

(2020-2023+ GLADIATOR JT)


INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Tail Light
- (1) RH Tail Light
- (2) Resistor Brackets
- (4) Resistor Bracket Clips
- (4) Machine Screws
- (4) Machine Screw Nylon Nuts

TOOLS REQUIRED

- 8mm Socket
- Ratchet
- Pliers
- Phillips Screwdriver

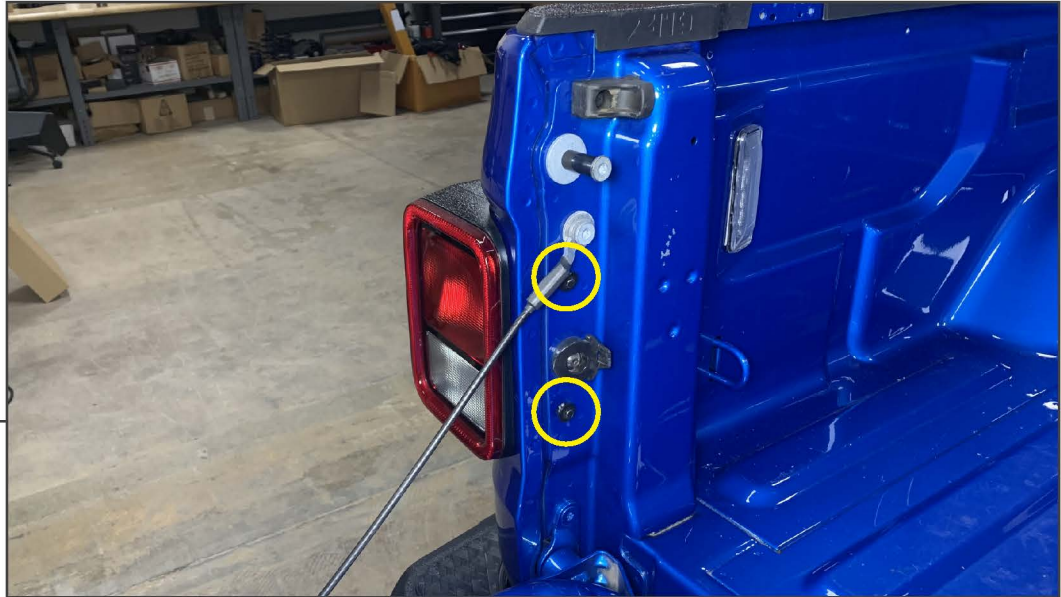


STEP 1

Lower the tailgate to access the tail light bolts. Using an 8mm socket, remove the (2) bolts securing the tail light to the vehicle.




STEP 2

Using a soft pry tool, depress the tab on the factory light while pulling the light towards the rear of the vehicle.

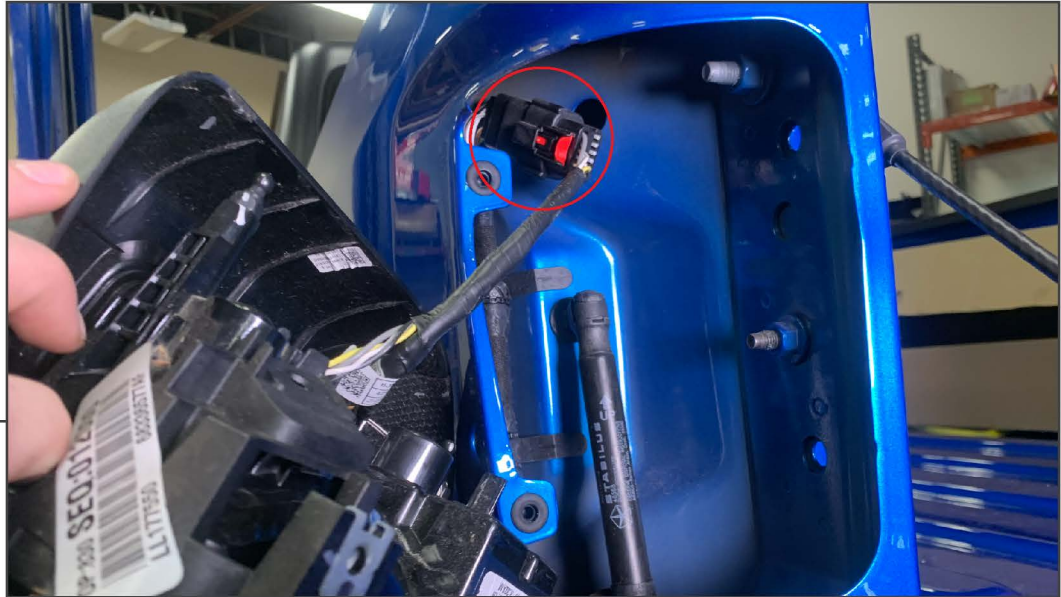

STEP 3

Slide the red lock tab back. Depress the tab on the electrical connector while pulling the connectors away from each other.

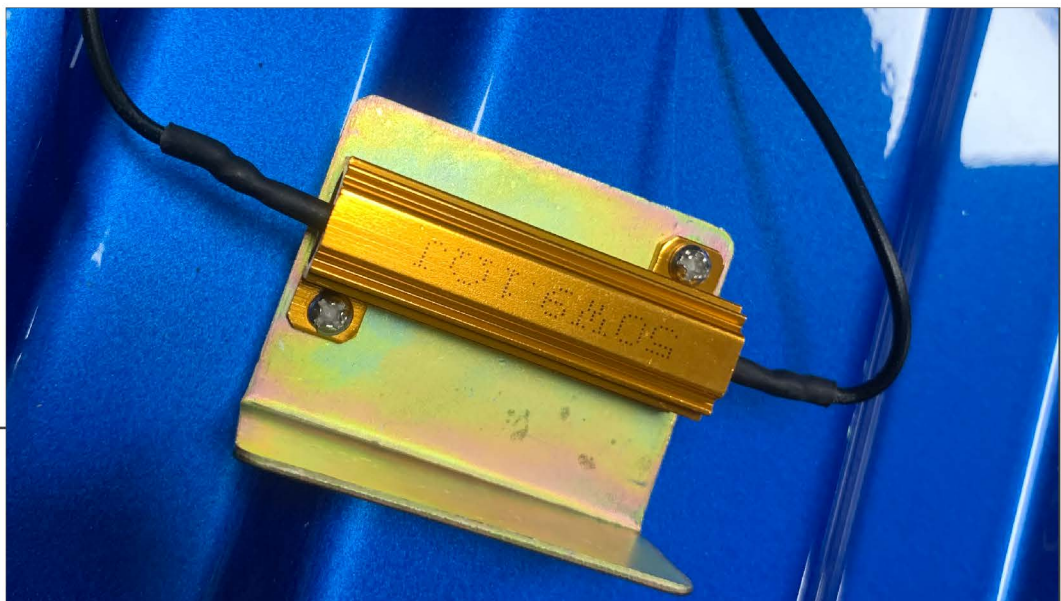

STEP 4


Mount the resistors to the resistor brackets using the supplied hardware. Hold the nylon nut with pliers while tightening the screws with a Phillips head screwdriver.

STEP 5



Install (2) metal clips to the resistor bracket.

STEP 6

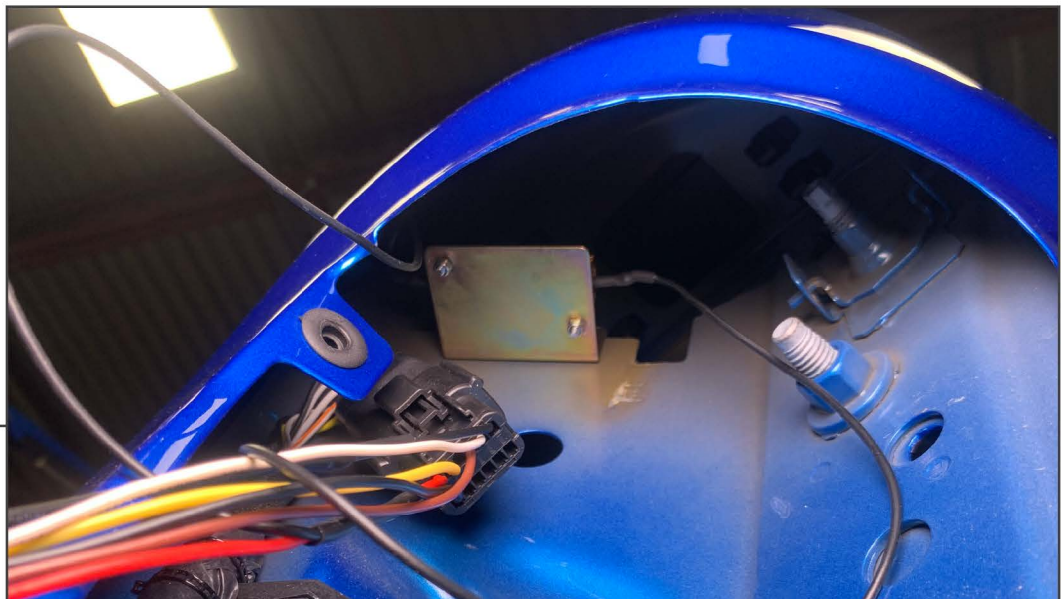

Using the (2) metal clips attached to the bracket, attach the resistor bracket to the vehicle sheet metal.

Fit the tail light wiring connector into the vehicle wiring harness connector.



STEP 7

Push the tail light into the vehicle, ensuring the alignment pins align to the rubber grommets within the bed. Secure the tail light using the OEM bolts.

Repeat steps 1-7 for the remaining tail light.

Installation is now complete.