

MAXIMUS-3

★ ★ ★

JT/GLADIATOR TRUCK

MAXIMUS-3 JT REAR RUBI STEPS

PART #: JT4028RS

INSTALLATION GUIDES

PLEASE MAKE SURE YOU READ AND UNDERSTAND THE ENTIRE INSTALLATION GUIDE BEFORE YOU START. WE EXPECT YOU TO HAVE BASIC MECHANICAL ABILITIES TO PERFORM THIS INSTALLATION.


WE RECOMMEND THAT YOU SEPARATE AND IDENTIFY ALL THE PARTS AND HARDWARE KITS YOU RECEIVED WITH YOUR SHIPMENT BEFORE YOU PROCEED TO DISASSEMBLE YOUR JEEP.



IMPORTANT

Follow these instructions precisely. Maximus-3 is not liable for any damaged caused from improperly installed products. It is the purchaser's responsibility to ensure both the installation and maintenance is performed properly as set-forth in this guide. We recommend using anti seize paste on all non-thread lock bolts.

<u>Component List:</u>	<u>Qty</u>	<u>Hardware Kits:</u>	<u>Qty</u>
JT Rear Rubi Step Assy - L	1	Maximus-3 Steps to Stock Rubi Steps	
JT Rear Rubi Step Assy - R	1	3/8 Carriage Bolts	4
		3/8 Flanged Nuts	4
<u>Tools Required:</u>		Maximus-3 Steps Bottom to Top	
✓ 15 mm Metric Drive Socket		M8 x 30 Button Socket Bolts – Black	4
✓ 9/16" Deep Socket		M8 x 16 Washers – Black	4
✓ Metric Allen Keys Set			

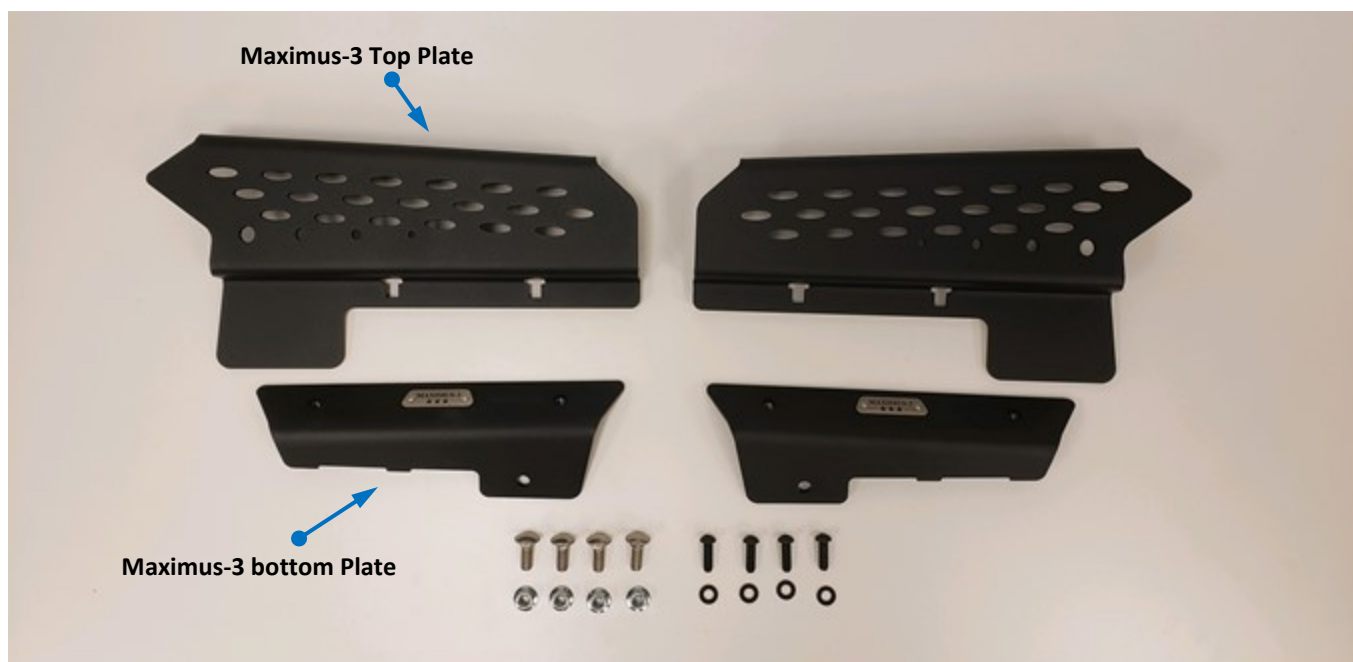

INSTALLATION STEPS

1. REMOVE FACTORY RUBICON REAR QUARTER ROCK SLIDERS.

Using 15 MM socket remove the factory Rear Quarter Sliders (5 bolts on each side). Save all the bolts for reuse.

2. BOLT MAXIMUS-3 TOP PLATE TO THE FACTORY QUARTER SLIDERS

Separate the Maximus-3 Steps Assembly by removing 2 M8 bolts from each. Remember how it was assembled. Using carriage bolts and flanged nuts supplied, bolt the top plate to the factory quarter sliders as show below.

Reassemble the bottom plate to the top plate.

3. BOLT BACK THE ASSEMBLY TO THE VEHICLE USING THE FACTORY HARDWARE



Your installation is complete. If you have questions regarding this installation, please contact us at sales@maximus-3.com or call 248-821-6654

4/19/2022

6575 19 Mile Road, Sterling Heights, MI 48314

P: (248) 821 6654

MAXIMUS-3.COM