

# MAXIMUS-3



---

JL WRANGLER

## JL REAR FLASHLIGHT MOUNT

Part #: JL6001ML

### INSTALLATION GUIDES

Please make sure you read and understand the entire installation guide before you start. We expect you to have basic mechanical abilities to perform this installation.

We recommend that you separate and identify all the parts and hardware kits you received with your shipment before you proceed to disassemble your Jeep.

---



---

## IMPORTANT

Follow these instructions precisely. Maximus-3 is not liable for any damage caused by improperly installed products. It is the purchaser's responsibility to ensure both the installation and maintenance is performed properly as set forth in this guide. We recommend using anti seize paste on all non-thread lock bolts.


---

**Parts List:**

Mounting Bracket with Mag Light Clips      Qty 1

**Tools Required:**

- T-25 Torx bit/socket
- Socket Wrench

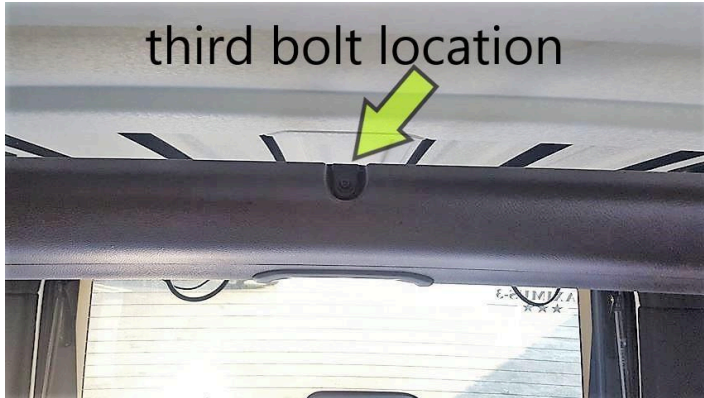

**INSTALLATION STEPS.**

Remove three factory torx bolts using a T-25 torx bit. Two are in the rear cargo area. The third bolt location is above the rear seats (other side of the sports bar)

Place the flashlight bracket into place. Replace the three factory bolts. Done!