

SUPER SLIM LED TAIL LIGHTS

(2020-2025+GLADIATOR JT-WITH OEM HALOGEN TAIL LIGHTS)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Tail Light
- (1) RH Tail Light

TOOLS REQUIRED

- 8mm Socket
- Ratchet

STEP 1




Lower the tailgate to access the tail light bolts. Using an 8mm socket, remove the (2) screws securing the tail light to the vehicle.

STEP 2



Using a soft pry tool, depress the tab on the factory light while pulling the light towards the rear of the vehicle.

STEP 3

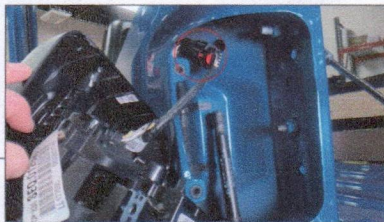

Slide the red lock tab back. Depress the tab on the electrical connector while pulling the connectors away from each other.

STEP 4



Determine the LH/RH tail lights using the label embossed in the back of the light assembly.


Slide the red lock on the electrical connector back, then plug the connector into the vehicle harness. Slide the red lock towards the vehicle harness once the connector is fully seated.

STEP 5



Align the tail light to the vehicle, and firmly press the outside of the light to seat the mounting dovetails into the vehicle rubber grommets. Secure the tail light into place using the original (2) 8mm screws.

STEP 6

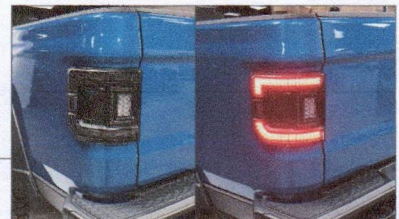

Repeat Steps 1-5 to the opposite side of the vehicle for the remaining tail light.

Installation is now complete.