

LED TAIL LIGHTS

(2020-2023+ GLADIATOR JT)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH Tail Light
- (1) RH Tail Light
- (2) Resistor Brackets
- (4) Resistor Bracket Clips
- (4) Machine Screws
- (4) Machine Screw Nylon Nuts

TOOLS REQUIRED

Phillips Head Screwdriver Pliers 8mm Socket Socket Wrench





Lower the tailgate to access the tail light bolts. Using an 8mm socket, remove the (2) bolts securing the tail light to the vehicle.




STEP 2

Using a soft pry tool, depress the tab on the factory light while pulling the light towards the rear of the vehicle.





Slide the red lock tab back. Depress the tab on the electrical connector while pulling the connectors away from each other.

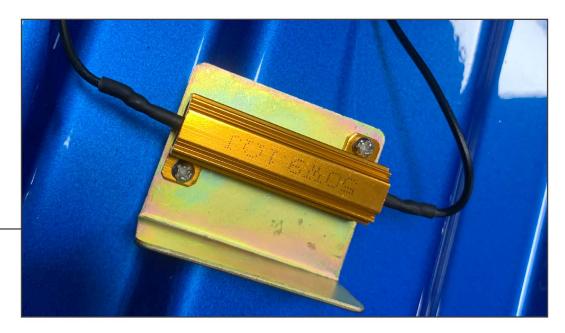


STEP 4

Mount the resistors to the resistor brackets using the supplied hardware. Hold the nylon nut with pliers while tightening the screws with a Phillips head screwdriver.





Using (2) clips per side, clip the resistor bracket to the vehicle.

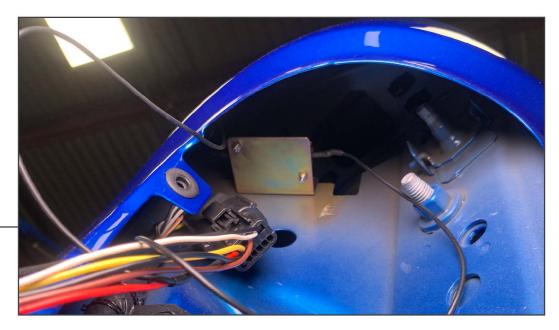

STEP 6

Plug in the tail light, push the light into the vehicle. Secure the light to the vehicle using the factory hardware.





Installation is now complete.