

## LED HITCH STEP

(UNIVERSAL - TRUCKS WITH 2" HITCH RECEIVER)

## INSTALLATION INSTRUCTIONS

## **CONTENTS**

- (1) Hitch Step
- (1) U-Bolt
- (1) Reinforcement Bracket
- (2) Nuts
- (6) Wire Harness Hold Downs
- (6) Zip Ties
- (2) ScotchLok Connectors

## **TOOLS REQUIRED**

Socket Set Ratchet





STEP 1

Insert the LED hitch step into the vehicle hitch receiver and secure using a hitch pin (not included). Using (1) U-Bolt, (1) reinforcement bracket, and (2) nuts, secure the step to the bottom of the receiver.




STEP 2

Plug the hitch step 4-pin wiring harness into the vehicle 4-pin trailer connector.



STEP 3

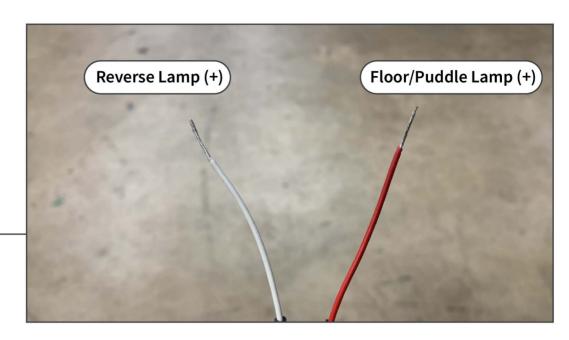

Wire the (2) separate wire leads to the vehicle lighting using the diagram below. Splice each connection using the provided (2) Scotchlok connectors.

Hitch Step Wire Leads - Vehicle Harness
Red (Floor/Puddle Lamp) - Parking Lamp (+)
White (Reverse Lamp) - Reverse Lamp (+)



STEP 4

Neatly route all wiring harnesses to the vehicle to prevent damage.

Installation is now complete.