REDROCK

CROSS BAR ROOF RACK - 60"

(UNIVERSAL)

INSTALLATION INSTRUCTIONS

CONTENTS

- (2) Cross Bars w/ Mounts
- (2) Weather Strips
- (4) Chassis Mount "1"
- (4) Chassis Mount "2"
- (4) Chassis Mount "3"
- (4) Chassis Mount "4"
- (4) Locking Threaded Knobs
- (6) Foam Pads
- (2) Keys

TOOLS REQUIRED


Isopropyl Alcohol Microfiber Cloth Scissors/Cutters





STEP 1

Locate the mounting location for the roof rack on the vehicle. Once identified, adhere the (1) foam pad onto the vehicle to protect the painted finish.

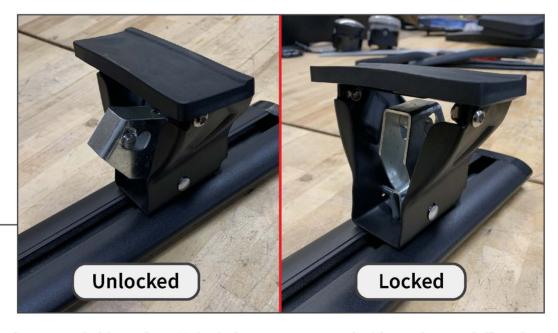

STEP 2

Place the roof rack on a workable surface. Unlock the mounts on each side, and center/offset the roof rack to fit the application. Test fit to the vehicle to ensure mounting locations and roof rack alignment is correct. Once aligned as desired, lock the mounts into place.





STEP 5

Once the roof rack is tight to the vehicle, turn the key to lock the knob in place. Close the vehicle door.

Repeat steps 1-5 for the remaining roof rack bar. Installation is now complete.