

Please read and understand all instructions before starting this installation. The manufacturer holds no responsibility for any personal injury or damage sustained to vehicle during installation or use of this product.

CAUTION: This product is designed primarily to enhance the appearance of this vehicle and in no way will prevent damage to vehicle, personal injury or death in the event of an accident.

TOOLS REQUIRED:

10mm Socket Wrench
Phillips Screw Driver
Flat Screw Driver

COMPONENTS INCLUDED:



A. (1) Grille
B. (8) M5x20mm Phillips Screws
C. (8) M5 Flange Nuts
D. (2) Mounting Brackets

Packaged Grille:



STEP 1: REMOVING FACTORY OE GRILLE




- 1) **NOTE:** Cover the top of the front bumper with masking tape to protect the finish when removing the factory grille shell and installing the Grille.
- 2) Open the hood and remove one plastic fastener on each side of the factory grille shell using a flat screw driver (Fig 3)
- 3) Proceed to remove the two top factory screws holding the center of the grille shell to the radiator support using a Phillips screw driver or a 10mm socket wrench (Fig 2). Once you have removed the plastic fasteners and factory screws from across the top of the grille shell, carefully pull up on the grille shell to unfasten the bottom two clips and remove it from the vehicle (Fig 3).

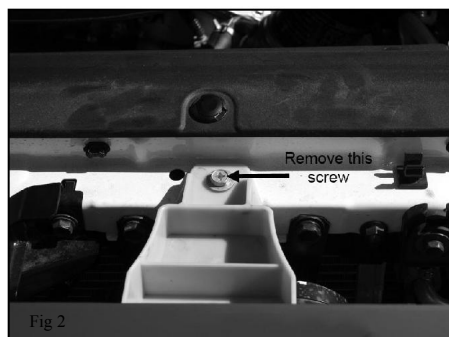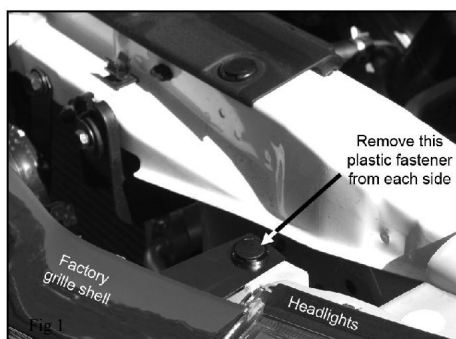

STEP 2: INSTALLING NEW GRILLE

- 1) Attach the two mounting brackets to the back of the package grille shell (top side) using Phillips screws and flange nuts provided. (Fig 4)
- 2) Position the new Grille onto the factory grille shell cavity. Slide in Grille from the top of the grille shell cavity, and then snap in the bottom clips. (Fig 5)
- 3) Attach the top of the new Grille using the same factory screws used to mount the factory grille shell removed in step two (Fig 6). Align Grille and then tighten all screws at this time.

Installation Instructions Package Grille 05-11 Toyota Tacoma

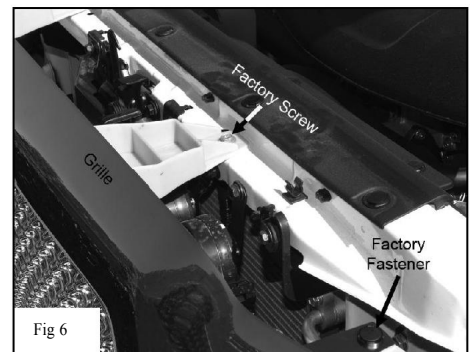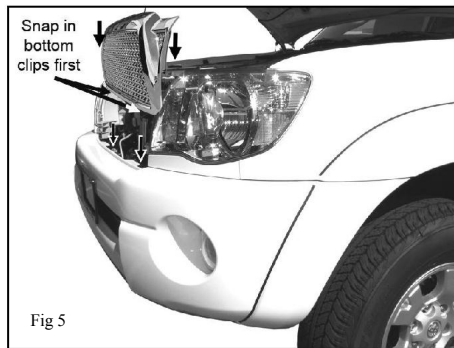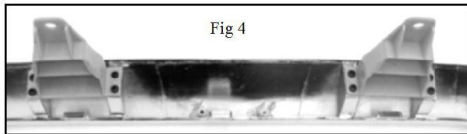

- 4) Close the hood slowly to make sure that it doesn't make contact with the Grille.
- 5) Do periodic inspections to the Grille to make sure it is secure and tight.
- 6) Complete the installation.

