


1. **NOTE: STEPS 1 thru 3 for 2007-2009 Tundra ONLY:** Locate the black plastic applique near the top of the grill.
2. Using the Pry Tool provided, carefully pry the plastic applique away from the grill. Begin by lifting up the bottom drivers side corner and work your way across to the bottom passenger side corner. Remove applique.
3. With the applique removed, use a 10mm nut driver to remove the (5) exposed bolts.
4. Carefully raise hood.
5. Reach under the hood to the backside of the grill and disconnect the hood lock rod from the grill by releasing the lock mechanism and gently lifting the rod away from grill.
6. Reach under the hood to the backside of the grill, and using a nut driver remove (10) nuts.
7. Carefully lower hood.
8. Starting on the driver side top corner of the grill, and then the passenger side, use the Pry Tool provided to carefully pry the grill loose from the hood. Set grill aside.
9. Clean front of hood edge, and carefully raise hood.
10. Align hood shield with hood edge.
11. Align (2) holes in hood shield with holes in hood. Install a fastener in each hole.
12. Carefully lower hood.
13. **NOTE: 2008 and up Sequoia and 2010 and up Tundra ONLY:** Replace (5) existing white pins on backside of grill with longer pins included in kit.
14. Reinstall grill by aligning with holes in hood edge. Ensure that the hood shield is **BETWEEN** the grill and the hood.
15. **NOTE: 2007-2009 Tundra ONLY:** Reattach the grill by reinstalling (5) bolts previously removed.
16. Carefully raise hood.
17. Reach under the hood to the backside of the grill, and reinstall (10) nuts previously removed.
18. Reach under the hood to the backside of the grill and reattach the hood lock rod to the grill.
19. Carefully close hood.
20. **NOTE: 2007-2009 Tundra ONLY:** Carefully reinstall the previously removed applique. Slide the top clips in first, then press firmly to snap remaining tabs into place.
21. Apply (4) Bump ons to hood surface.

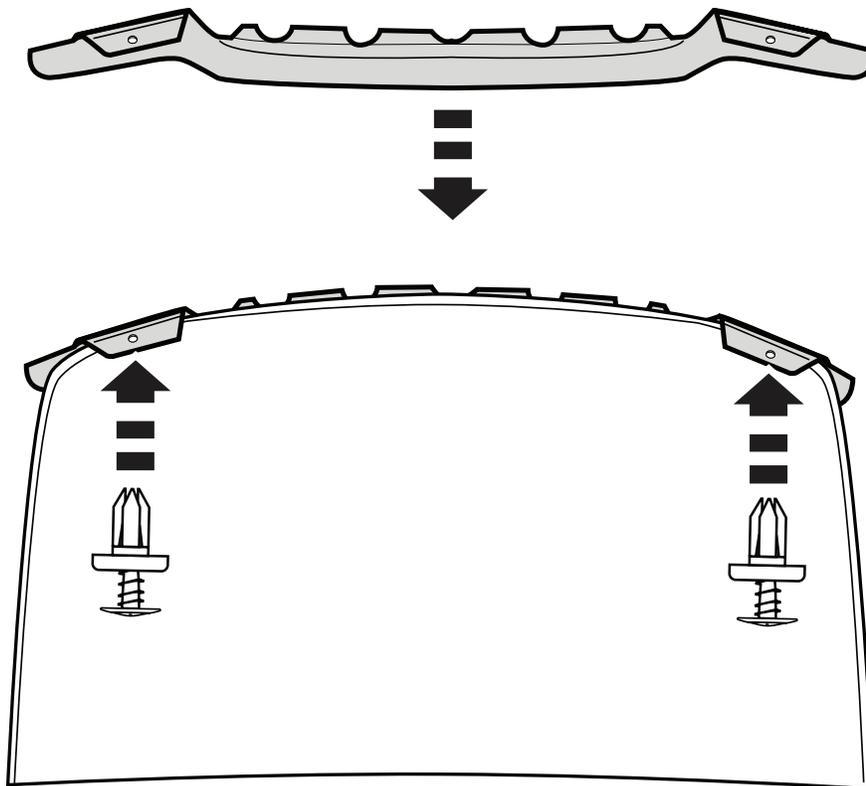

**IMPORTANT:** Before driving, ensure the hood shield is properly secured to vehicle. Clean with a **SOFT** cloth and soap and water **ONLY!** Using abrasive cleaners, chemicals, or solvents will **VOID** the warranty on this product.