



**Before returning this product
to the store of purchase**

Contact Dee Zee if you experience the following problems:

- Missing Parts
- Installation Problems/Questions
- Warranty Questions

1.800.779.2102

Hours of operation: 8am - 5pm CST, Mon-Friday

Review complete warranty policy and register your product at:

www.deezee.com



Dee Zee Toolbox Installation Instructions

Congratulations on your purchase of a quality Dee Zee product. Dee Zee is recognized as having the highest quality running boards and accessories on the market today. We have earned this reputation by offering our customers a product they can be proud to place on their vehicles. Dee Zee meets all the criteria of manufacturing a custom-fit product which guarantees it to be the easiest product to install.

Note: Please take time to read all of the instructions before beginning this installation.

Note: Use J-Bolt provided or WARRANTY IS VOID...DO NOT USE self tapping screws to mount.

Warning! If it is necessary to drill any holes into the vehicle, Dee Zee recommends putting a sealant or rust inhibitor around all holes drilled into the body of the vehicle.

Cleaning Instructions: To maintain the bright finish of your Dee Zee Stainless Steel Toolbox, clean with a mild detergent and then apply a high grade automotive type wax.

If you should happen to have any questions with this product or you have an installation question, please feel free to call us at:

1-800-779-8222

If you would like to find out more information on Dee Zee's products please feel free to visit our website at:

WWW.DEEZEE.COM

Dee Zee

Single Lid / Double Lid Tool Box

Installation Instructions


This toolbox installation instruction is for both Single-Lid Toolboxes and Double-Lid Toolboxes.
 Cette instruction d'installation de boîte à outils est pour des boîtes à outils de Single-Lid et des boîtes à outils de Double-Lid.

Double-Lid Toolbox:

Toolbox lid design may vary from picture with different toolbox models.

Boîte à outils De Double-Lid:

La conception de couvercle de boîte à outils peut changer de l'image avec différents modèles de boîte à outils.

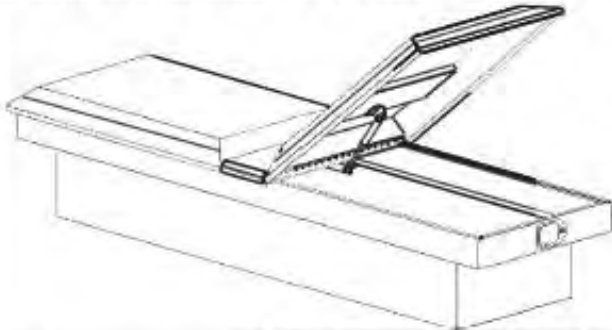

A

|


X1

Single-Lid Toolbox:


Toolbox lid design may vary from picture with different toolbox models.

Boîte à outils De Single-Lid:

La conception de couvercle de boîte à outils peut changer de l'image avec différents modèles de boîte à outils.

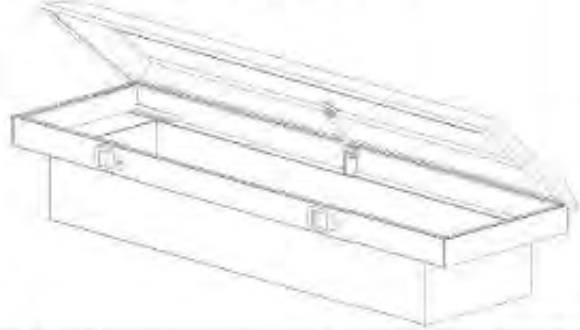

B



3/8" J-Bolt

X2

C

3/8" Flat Washer



X2

D


3/8" Hex Nut



X2

F

Foam Tape



X2


G **Toolbox Tray (Optional)**

Note: Some toolbox models do not come with the toolbox tray.



X1


Tools Required:
Outils Nécessaires:

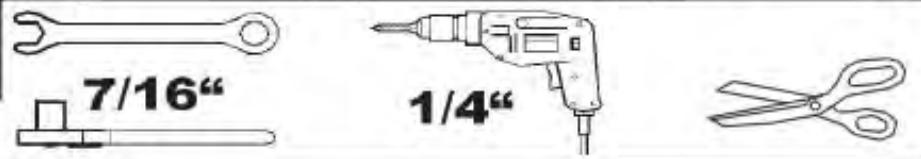

1

Peel backing off of foam tape (F).


Dégagement de peau de la bande de mousse (f).




2

Place foam gasket (F) onto the bottom of toolbox (A). Trim the foam gasket (F) flush with the ends of toolbox (A).

Placez la garniture de mousse (f) sur le bas de la boîte à outils(a). Équilibrez l'éclat de la garniture de mousse (f) avec les extrémités de la boîte à outils (a).

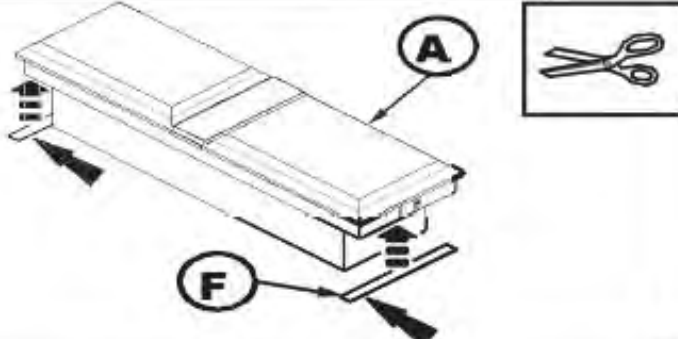

3

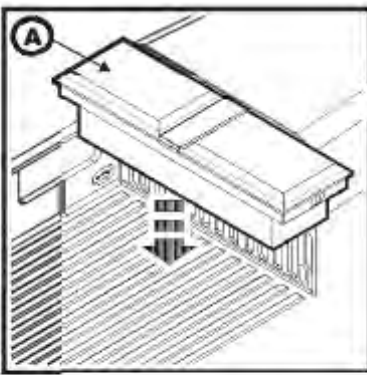

Place toolbox (A) into the back of your truck bed.
 Placez la boîte à outils (a) dans le dos de votre lit de camion.




4


Using Drawing A and B below as a guide, mark the mounting hole location for J-hook (B). The mounting hole location should be centered inside the toolbox (A) and near the lip of the truck bed rail as shown below.

En utilisant A et B de dessin ci-dessous comme guide, marquez l'emplacement de trou de support pour le crochet en J (b). L'emplacement de trou de support devrait être centré à l'intérieur de la boîte à outils et s'approcher de la lèvre du rail de lit de camion comme montré ci-dessous.


Drawing A

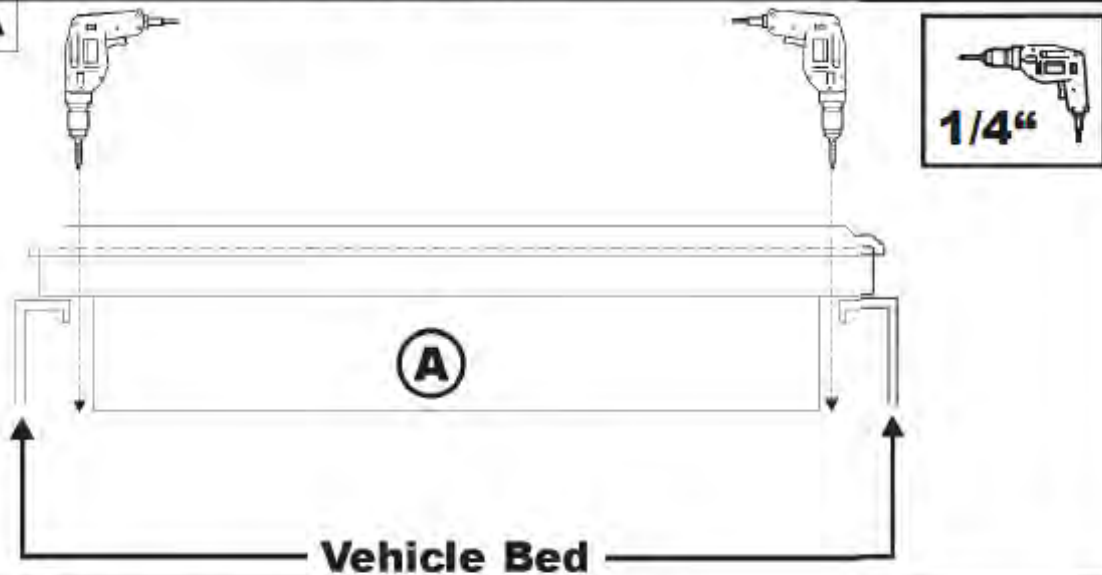

Drawing B

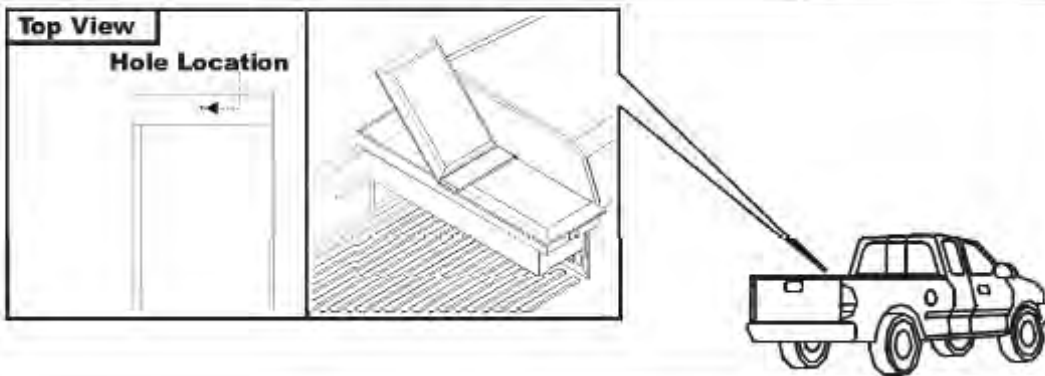



3 Place toolbox (A) into the back of your truck bed.
 Placez la boîte à outils (a) dans le dos de votre lit de camion.

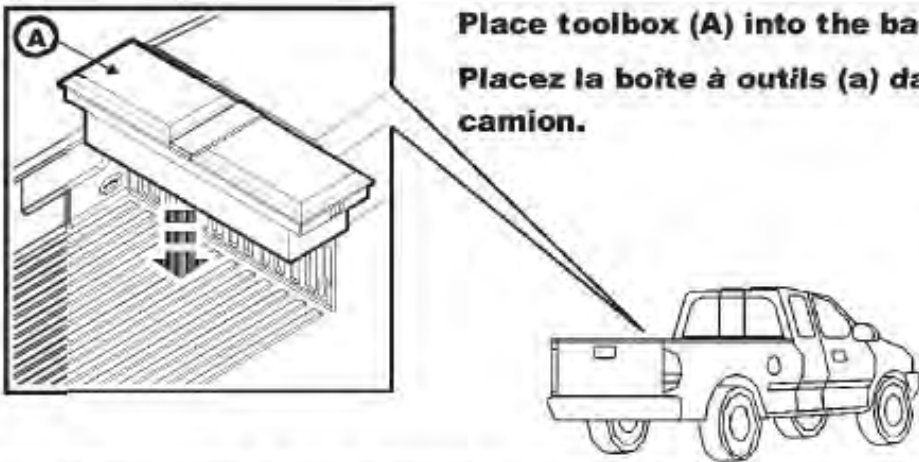


STOP!
FOR 8601
SEE PAGE
3&4

4 Using Drawing A and B below as a guide, mark the mounting hole location for J-hook (B). The mounting hole location should be centered inside the toolbox (A) and near the lip of the truck bed rail as shown below.

En utilisant A et B de dessin ci-dessous comme guide, marquez l'emplacement de trou de support pour le crochet en J (b). L'emplacement de trou de support devrait être centré à l'intérieur de la boîte à outils et s'approcher de la lèvre du rail delit de camion comme montré ci-dessous.

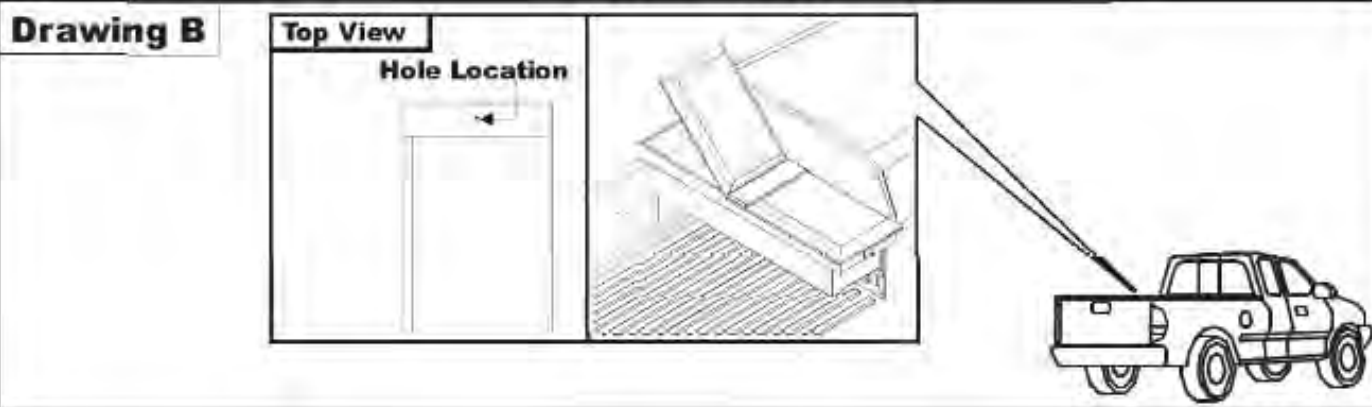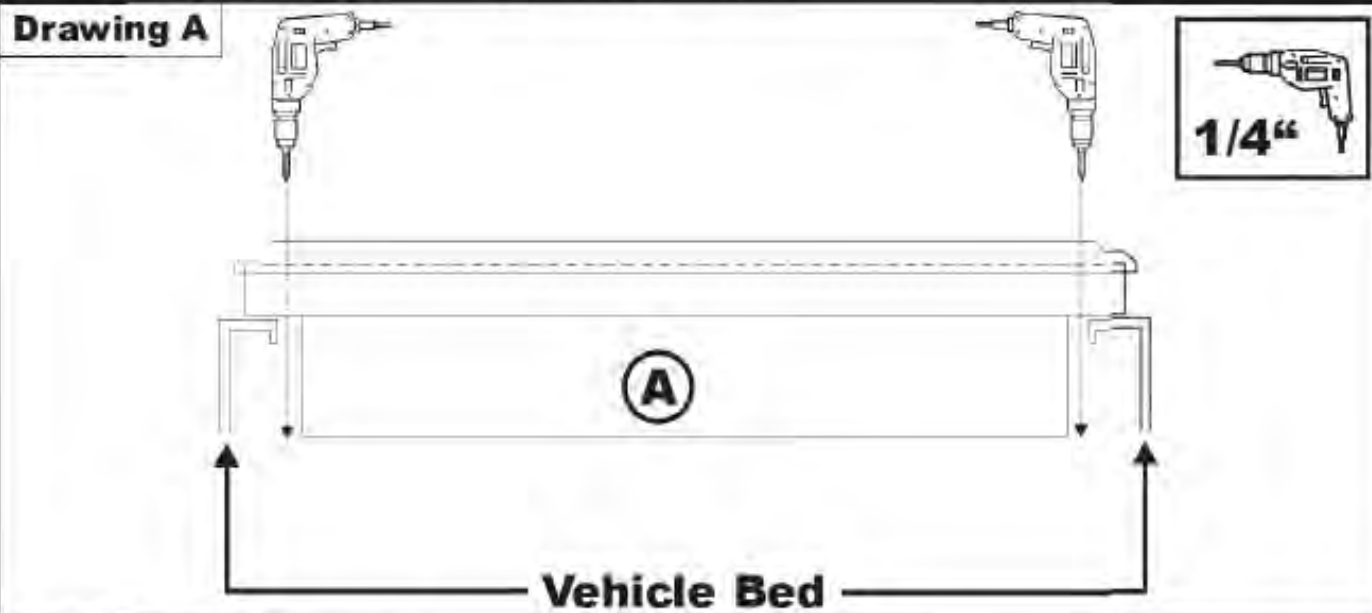

3a

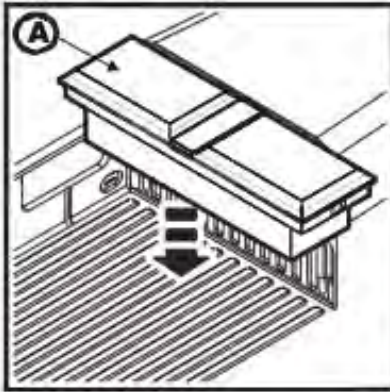

Page 3 & 4 is for Dz 8601 Only!


Place toolbox (A) into the back of your truck bed.




4a

Using Drawing A and B below as a guide, mark the mounting hole location for J-hook (B). The mounting hole location should be on opposite corners inside the toolbox (A) and near the inside edges of the box as shown below.

Drawing A

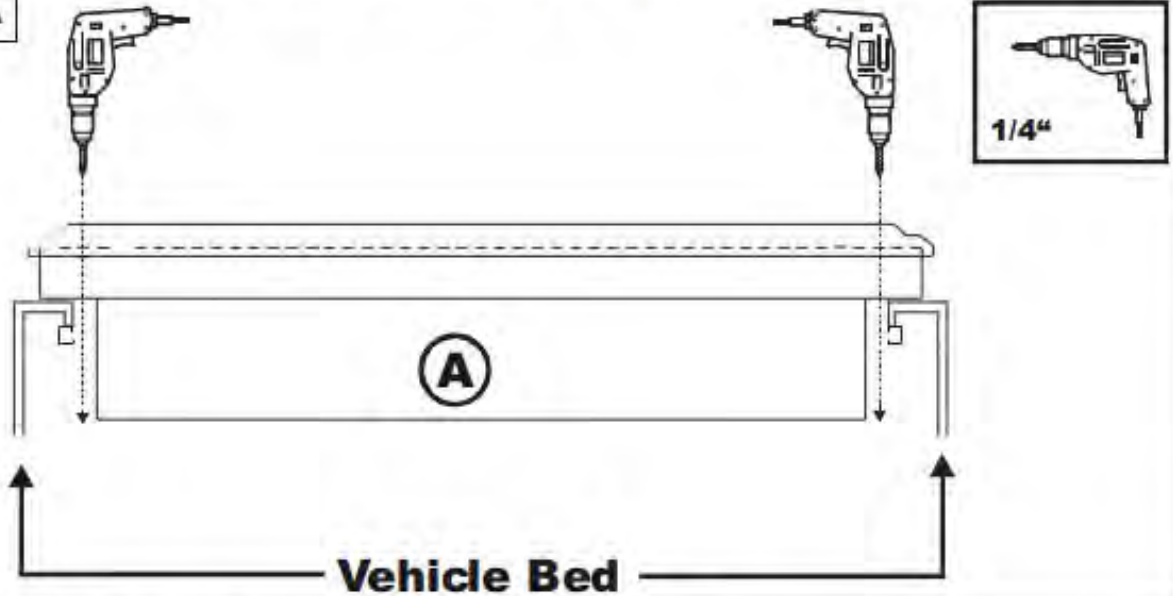

Drawing B

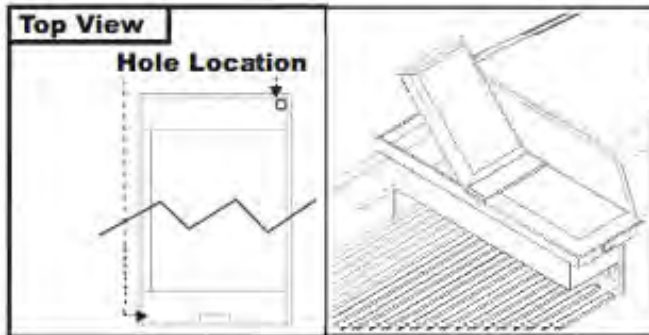


5a

Secure toolbox (A) to the vehicle truck bed using J-bolts (B), flat washer (C), and hex nuts (D).



Fixez la boîte à outils (a) au lit de camion de véhicule en utilisant les boulons en J (b), à plat la rondelle (c), et les écrous de hexa (d).


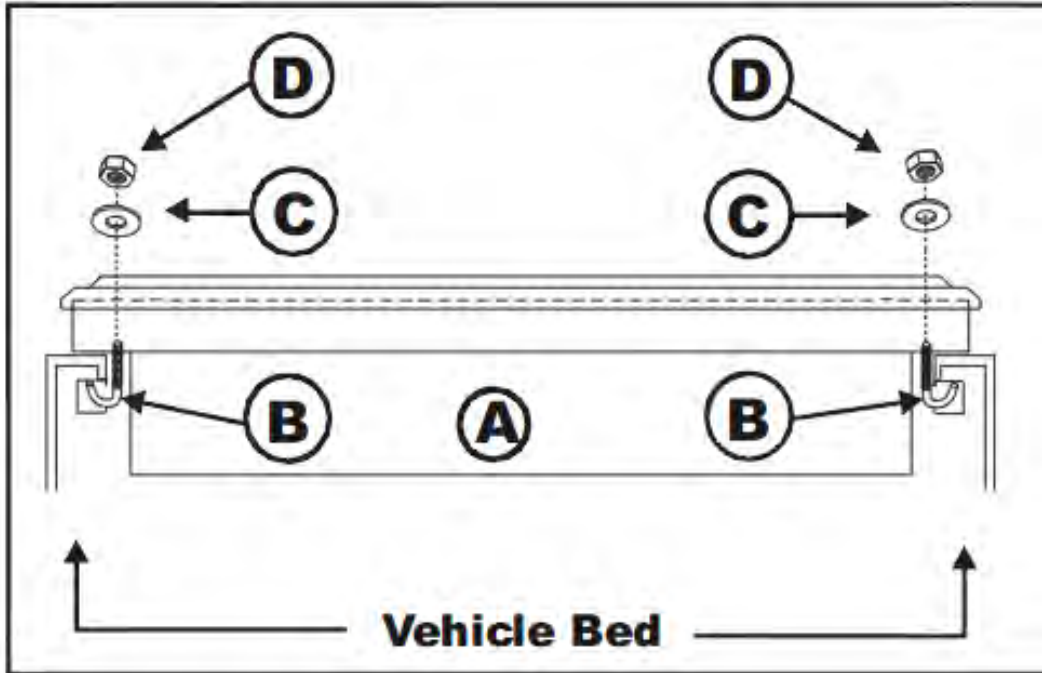


5

Secure toolbox (A) to the vehicle truck bed using J-bolts (B), flat washer (C), and hex nuts (D).




Fixez la boîte à outils (a) au lit de camion de véhicule en utilisant les boulons en J (b), à plat la rondelle (c), et les écrous de hexa (d).

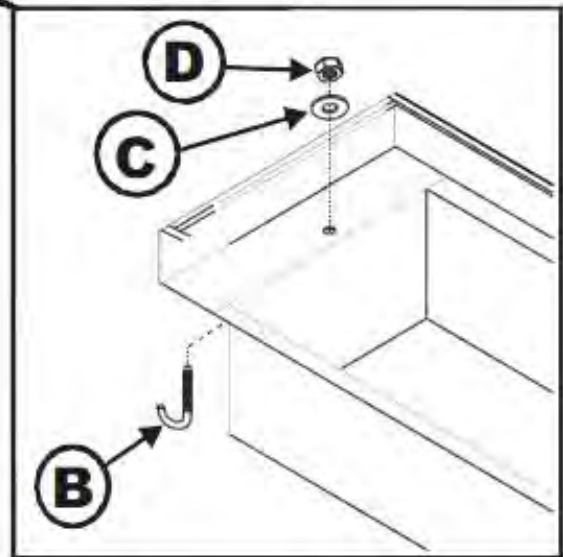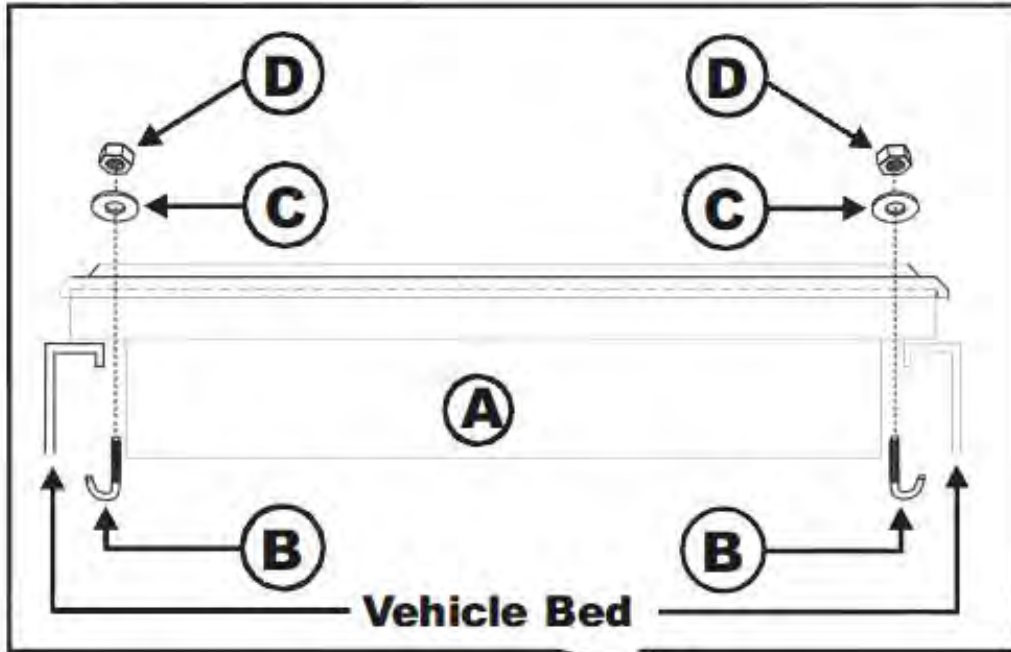


MAINTENANCE INSTRUCTIONS: All locks, latches, latching rods, and hinges should be lubricated regularly to assure smooth and proper operation for the life of the toolbox.

INSTRUCTIONS D'Entretien: Toutes les serrures, verrous, verrouillant des tiges, et des charnières devraient être lubrifiées régulièrement pour assurer l'exécution sans heurt et appropriée pendant la vie de la boîte à outils.

Toolbox Paddle Latch Assembly

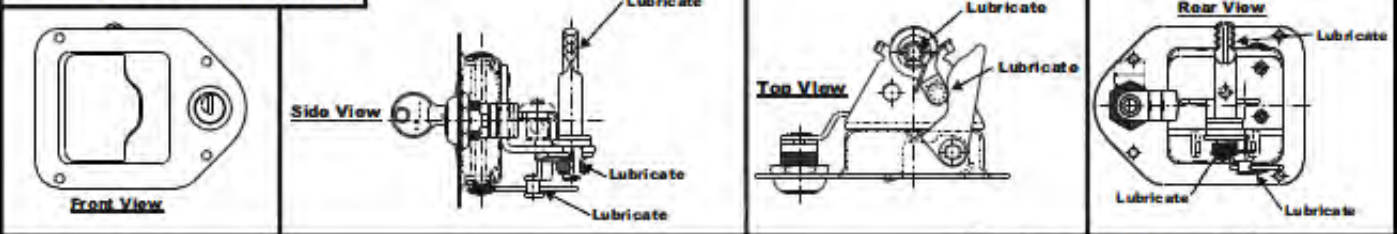

Toolbox Catch Assembly

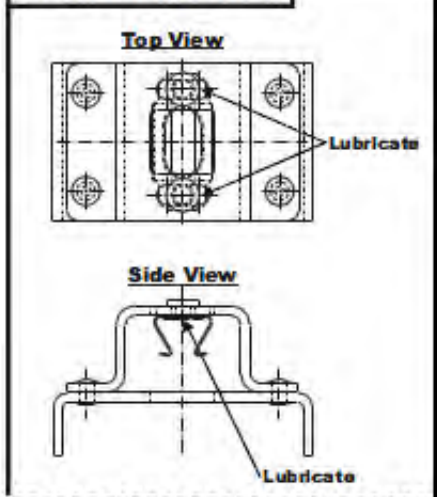

Ever lose your keys? Save Yourself Time and Trouble?

Order some extra keys now and have them when you need them. Please fill out and mail this portion to us. We'll send you a couple of extra keys for your Tool Box for just \$11.00 (American).

Name: _____

Day Phone: _____ - _____ - _____

Address: _____

Method of Payment:

- Cash, Check, or Money Order
- Master Card
- Visa

City, State, Zip: _____

Expiration Date: _____

KEY and LOCK#: _____

Card Number: _____

Please mail form and payment to : Dee Zee, Inc.
 OR P.O. Box 3090
 Fax to: 515-265-7926 Des Moines, IA 50316

CLEANING INSTRUCTIONS: To maintain the luster of your tool box, use a mild detergent.




**Locks are provided as a deterrent to inadvertent opening or easy access to the contents of your toolbox. Contents stored in the toolbox are the responsibility of the user.

After drilling, it is recommended that a sealant or rust inhibitor be placed around all holes drilled into the body panel of the vehicle.


If you should incur any problems with the installation of this product, please feel free to call us at 1-800-779-8222. So that we may better serve you when you call, please have the W/O#, SEQUENCE#, and the DATE from the label on the outside of the box.

Replacement Parts for Crossover Toolbox

Toolbox Hook-Paddle Latch Assembly



Toolbox Hook-Catch Assembly

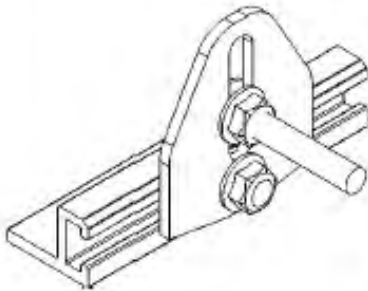

C-Channel Extrusion
Part Number: B 1602



Rotary Plate - Adjustable Latch
Part Number: B 1601



1/4-20 Hex Head Cap Screw
Part Number: PN 70B



1/4-20 Threaded Stud
Part Number: PN 810



1/4-20 Flange Locknut Zinc
Part Number: PN 178



1/4-20 Nylon Locknut Ultra
Part Number: PN 341B



Nylon Standoff
Part Number: PN 860



Pushbutton - Blue Series

Spacer Brace for Push Button
Part Number: B 1623



Adjustable Latch
Part Number: B 1610



Carburetor Clip 7R
Part Number: LCC-2



Shock Mount
Part Number: SL-69



Nylon Bushing
Part Number: PN 116



5/16-18 Nylon Insert Locknut
Part Number: PN 510



10 x 1/4 Square Pan Self Drill
Part Number: PN 872



Push Latch
Part Number: TB 85623



Rotary Latch
Part Number: TB 85624




Rod End Adaptor
Part Number: TB 85626




Replacement Parts for Crossover Toolbox Cont.


Shocks




Blade Style Shock			
Shock #	20#	40#	70#
Part Number	SL1-20	SL1-40	SL1-70



10mm Socket Style Shock			
Shock #	20#	40#	70#
Part Number	SL-3020	SL-3040	SL-3070




10mm Socket Style Shock					
Shock #	20#	40#	60#	80#	100#
Part Number	SL-3220	SL-3240D	SL-3260D	SL-3280D	SL-32100D

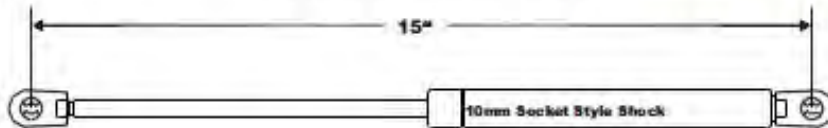

10MM Socket Style "Long" Style Shock		
Shock #	90#	40#
Part Number	SL-3390	SL-3340

Miscellaneous Parts


Foam Latch Gasket
Part Number: TB85409




Shock Clip
Part Number: SL-81



Striker Assembly
Part Number: TB85616



Shock Mount Nut
Part Number: PN 301



Latch Cover Rivet
Part Number: PN 285




Latch Rivet
Part Number: PN 157




Hinge Rivet
Part Number: PN 762



Shock Mount
Part Number: SL-69



Rod Clip
Part Number: LCC-1



Rod Guide
Part Number: TB85615



1/4" Flat Washer
Part Number: PN 72B



1/4 x 1" Sheet Metal Screw
Part Number: PN 97B



1/4 x 1" Sheet Metal Screw
Part Number: PN 97



1/4 x 1" Bottom Head Screw
Part Number: PN 96B



1/4" Locknut
Part Number: PN 341B



Mounting Bracket
Part Number: TBBRACE1



Divider Mounting Channel
Part Number: TB-Channel




Toolbox Divider
Part Number: TB-Divider




Toolbox Divider Tape
Part Number: CO-tape



Rear View: Locking Latch
Part Number: TB85613



Rear View: Non-Locking Latch
Part Number: TB85614



Rear View: Locking Hook
Part Number: Tb85608




Rear View: Non-Locking Hook
Part Number: Tb85608




Ordering Replacement Parts:

Ordering replacement parts for your toolbox is fast, convenient, and easy. Just call our customer service phone number at 1-800-779-2102 for pricing and ordering information. Please provide the customer service representative with the part number from the above parts list.

- 1) Keeping the striker plate perpendicular to the lid, adjust the striker location left and right to align the pin with the latch as shown below. The red dot shows the preferred location

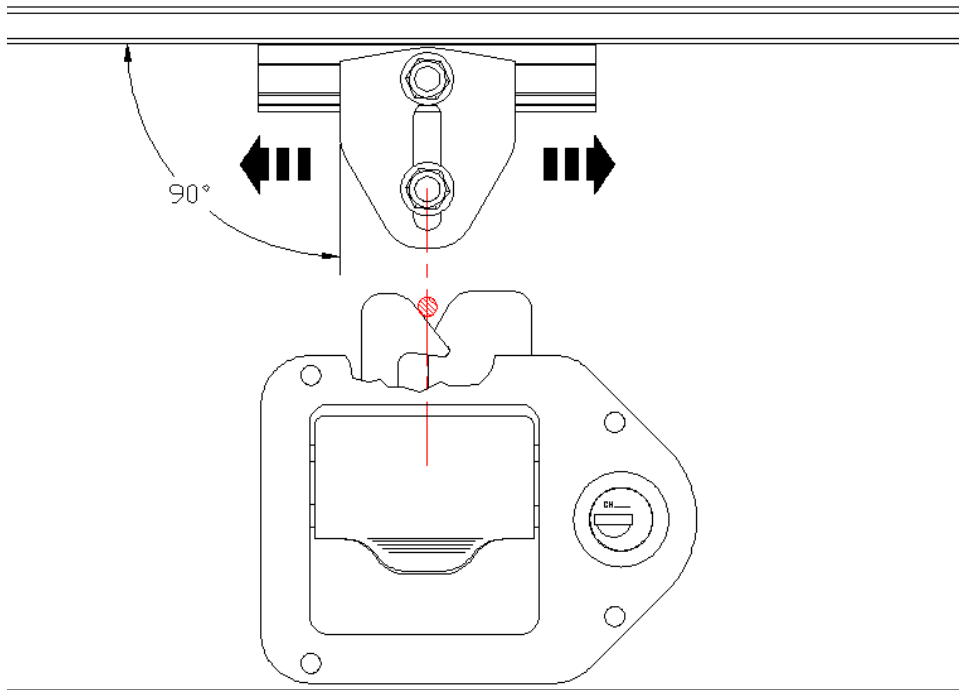

- 2) When the striker pin is correctly centered, tighten to top bolt to set the location.
- 3) Set the pin depth to ensure that the head will clear the latch.

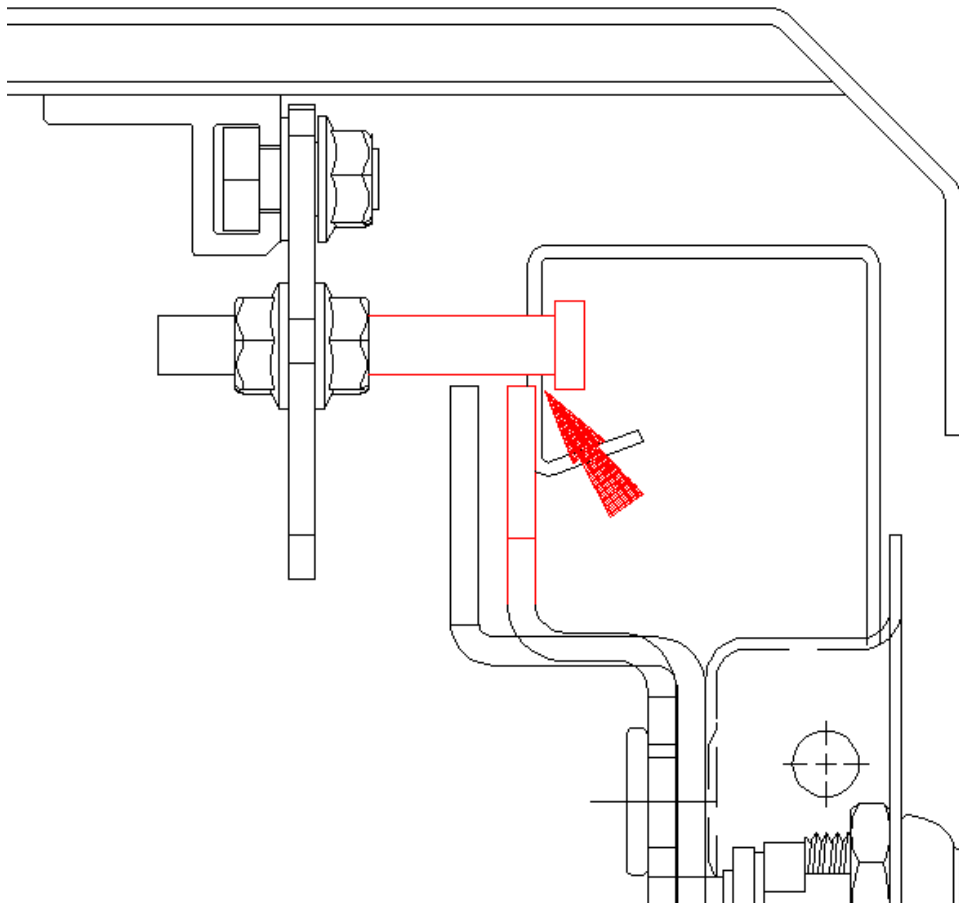

- 4) Tighten the pin in the lowest location, and close the lid. If the lid is able to move up and down when latched, the latch pin needs adjusted. Adjust the pin up the approximate amount the lid is able to move and retighten.

