

LED LICENSE PLATE AND REVERSE LIGHTS

(2022-2026+ TUNDRA)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) LH License Plate/Reverse Light
- (1) RH License Plate/Reverse Light

TOOLS REQUIRED

- 10mm Socket
- Ratchet
- Panel Removal Tool
- Needle Nose Pliers
- 90 Degree Pick


SKU # TU69441

STEP 1



Remove the (2) 10mm license plate screws, and set the license plate aside. Locate the (1) plastic push clip secure the plastic trim behind the license plate to the bumper core. Use a pry tool to pull the center of the clip outwards, and then remove the clip body from the trim panel.


STEP 2

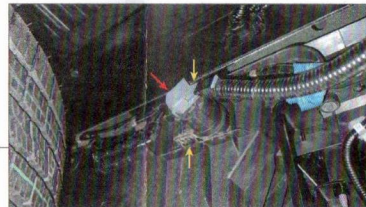

Locate the harness attached to the trailer lighting connector. Press the tab on the top of the connector, and unplug the harness.


Use a pry tool to press the two metal retainers securing the trailer lighting port to the bumper. The trailer lighting port will be removed through the face of the bumper once the retainers are pressed.

STEP 3

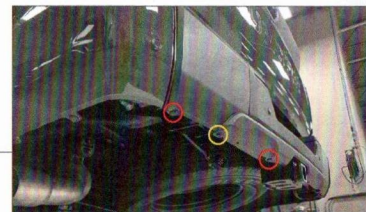


On each side of the bumper, remove (2) plastic push clips and (1) 10mm screw.

STEP 4

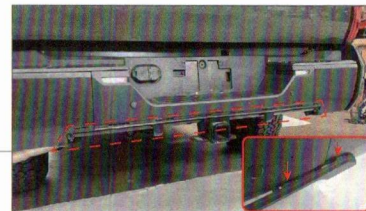

Begin to pull the lower trim panel away from the bumper. It is recommended to use a plastic pry tool to press the retaining tabs on the trim panel while pulling the trim panel away from the bumper.


STEP 5

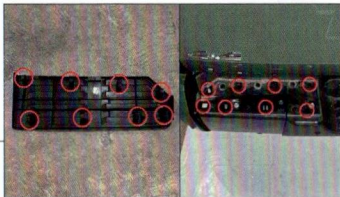

From under the bumper, use needle nose pliers to press the retaining tabs securing the upper bumper pads to the bumper. The tabs may require moderate pressure while pressing upwards to fully dislodge. It is recommended to start from the center of the bumper and work outwards. Using a 90 degree pick can be used to press from above the bumper once the pad begins to lift.

Note: The panels may bend slightly during the removal process, the panels will straighten out once installed to the bumper and when exposed to sun/heat naturally.


STEP 6

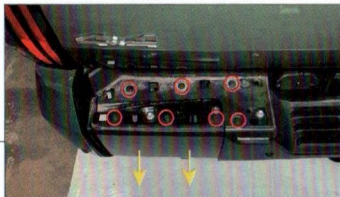

Remove (7) plastic push clips from the top of the bumper on each side of the bumper.


Remove the outer-most bumper cap from the bumper.

STEP 7

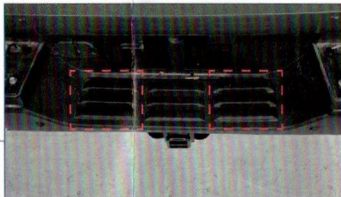


Use a pry tool to lift the (2) center covers from the bumper. These caps mount similarly to the end caps from Step 5.

STEP 8

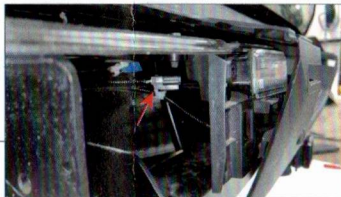

Reach behind the license plate/reverse light and unplug the connector by pressing the tab and pulling the connector away from the light.

STEP 9

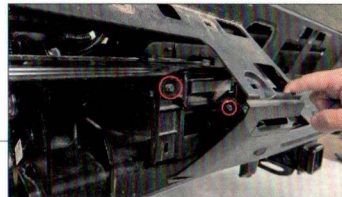

Begin to lift the bumper trim up and away from the bumper slightly, do not attempt to fully pull away. While holding the trim back, remove the (2) Phillips screws from the license plate/reverse light assembly. Then, manipulate the light out from the vehicle.

STEP 10



Fit the new light assemblies into the bumper, and secure using the original (2) Phillips screws per light. Plug the vehicle harness into the light, moderate pressure may be necessary to fully seat the connector. Test for functionality, the red parking light will change to white when the vehicle is in reverse.

STEP 11



Re-assemble the vehicle bumper following Steps 1-6 in reverse order reusing the original bumper hardware.

Installation is now complete.