





Kit Includes

- One (1) or Two (2) 3" LED Pods
- · Deutsch-style wire pigtail
- · Mounting bracket and hardware

Features

- Advanced TIR (total internal reflection) optics
- High intensity LED chips
- · Durable powdercoated aluminum construction
- Integrated Deutsch-style connector
- Pin fin heatsink design

Mounting

Specifications

• Input Voltage: 9-30V

• Input Power: SS3 Sport: 14.5 watts (Main Beam)

SS3 Sport: 0.4 watts (Backlight) SS3 Pro: 36 watts (Main Beam) SS3 Pro: 0.4 watts (Backlight) SS3 Max: 38.5 watts (Main Beam)

SS3 Max: 0.4 watts (Backlight) Current Draw: SS3 Sport: 1.1 amps @ 12.8V (Main Beam)


> SS3 Sport: 30 mA @ 12.8V (Backlight) SS3 Pro: 2.7 amps @ 12.8V (Main Beam) SS3 Pro: 30 mA @ 12.8V (Backlight) SS3 Max: 3 amps @ 12.8V (Main Beam) SS3 Max: 30 mA @ 12.8V (Backlight)


Operating Temperature: -40° to 185°F

• Weight: 2.5 lbs (single), 3.5 lbs (pair)

If you wish, you may use the included hardware to mount your pod. Fasteners are included. The most common mounting style is shown below. Stage Series Pods are also compatible with most standard mounting brackets on the market.

Tools Needed: 1/2" wrench and 5/32" allen

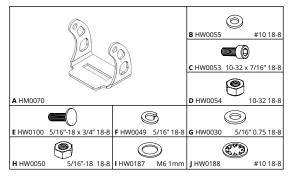




Wiring


| PIN | WIRE COLOR | FUNCTION | VEHICLE WIRING | | | |
|-------|------------|--------------------|--------------------------------------|--|--|--|
| PIN 1 | Red | Main Beam Power | Connect to positive supply | | | |
| PIN 2 | Black | Ground | Connect to negative or common ground | | | |
| PIN 3 | Blue | Backlight Power | Connect to your desired function | | | |



NOTE: This auxiliary lamp draws high current, and requires adequately-sized wiring for safe operation. If you are not using a Diode Dynamics wiring harness, using wire sized 16 AWG or larger. Be mindful of current requirements, especially if you are wiring multiple pods on a single circuit. **All power sources must be** properly fused and capable of safely delivering the required current. If you are unsure, contact us

for assistance, or a professional electrical installer.

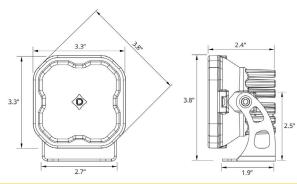

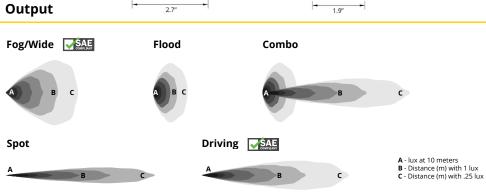

| | SS3 SPORT | | | | SS₃ PRO | | | | | |
|-------------------|--|------------------|-------|---------|--|---------|------------------|-------|---------|--------|
| | | А | В | С | | | А | В | С |] |
| Lens Color/Optics | cd* | Illuminance (lx) | Dista | nce (m) | SKU | cd* | Illuminance (lx) | Dista | nce (m) | SKU |
| White Driving | 54,700 | 547 | 234 | 470 | DD6120 | 66,500 | 665 | 258 | 520 | DD6128 |
| White Flood | 1,750 | 18 | 42 | 80 | DD6121 | 3,100 | 31 | 56 | 110 | DD6129 |
| White Fog | 10,600 | 106 | 103 | 210 | DD6122 | 11,900 | 119 | 109 | 220 | DD6130 |
| White Spot | 151,000 | 1510 | 389 | 780 | DD6123 | 131,500 | 1315 | 363 | 730 | DD6131 |
| White Combo | 31,500 | 315 | 177 | 350 | DD6479 | 35,100 | 351 | 187 | 370 | DD6481 |
| Yellow Driving | 53,500 | 535 | 231 | 460 | DD6124 | 60,900 | 609 | 247 | 490 | DD6132 |
| Yellow Flood | 1,600 | 16 | 40 | 80 | DD6125 | 2,850 | 29 | 53 | 110 | DD6133 |
| Yellow Fog | 9,050 | 91 | 95 | 190 | DD6126 | 10,900 | 109 | 104 | 210 | DD6134 |
| Yellow Spot | 149,000 | 1490 | 386 | 770 | DD6127 | 118,500 | 1185 | 344 | 690 | DD6135 |
| Yellow Combo | 28,100 | 281 | 168 | 340 | DD6480 | 33,406 | 334 | 183 | 370 | DD6482 |
| | * PEAK BEAM INTENSITY Measured Output Output Color White 1,520 lumens White 6000K White Yellow 1,300 lumens Yellow 3000K Yellow | | | | *PEAK BEAM INTENSITY Measured Output Output Color White 3,000 lumens White 6000K WI Yellow 2,700 lumens Yellow 3000K Ye | | | | | |

SS3 Max data available at www.diodedynamics.com

