



GLADIATOR GRILLE W/AMBER LED LIGHTING

(2018+ WRANGLER JL)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Grille Cover
- (1) Upper Grille
- (6) Plastic Push Clips
- (8) Metal Clips
- (8) Screws
- (8) Washers
- (8) Nuts

TOOLS REQUIRED

- Soft Pry Tool
- Phillips Head Screwdriver

SKU # J134252-JL




STEP 1

Using a soft pry tool, remove the (6) plastic push pins across the top of the factory grille cover. Then firmly pull the grille cover away from the vehicle.




STEP 2

Install the (8) supplied push clips to the clip posts across the bottom of the new grille.

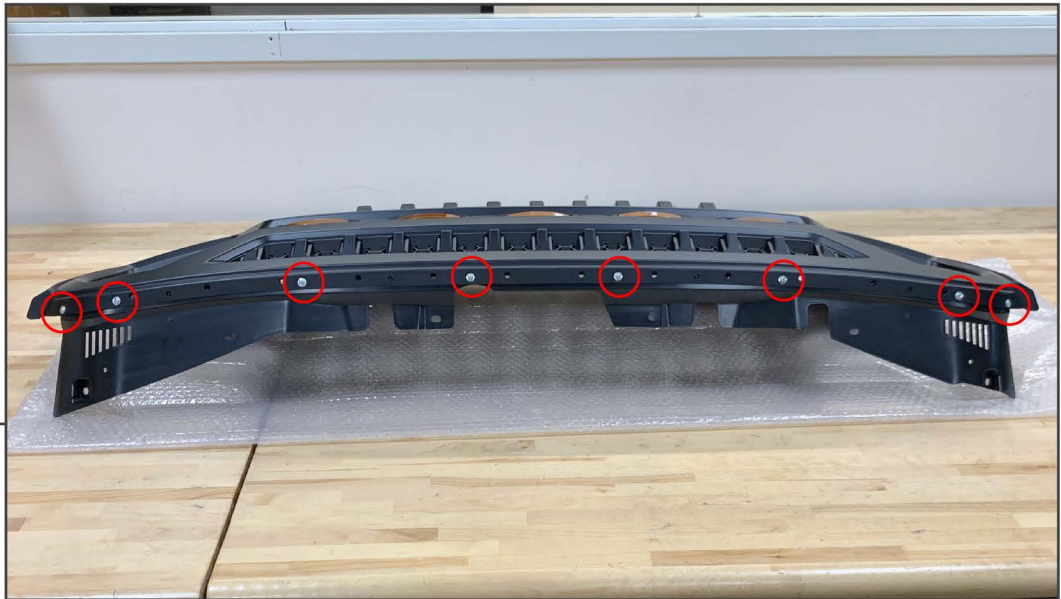

STEP 3

Using the supplied nuts, bolts, and washers attach the upper grille to grille cover.

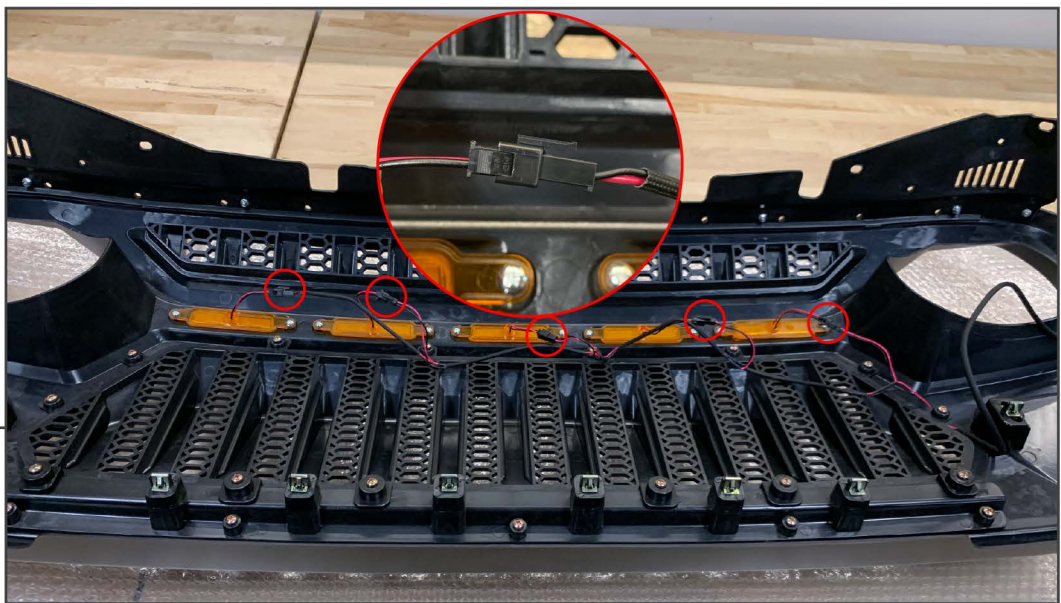

STEP 4

Connect the (5) grille lights with the supplied wiring harness.

**STEP 5**

Fold back the fender liner to access the fender marker light wiring. Remove the (2) 8mm screws and (1) push clip.

**STEP 6**

Wiring Instructions: Tap the grille wiring harness into the factory fender marker light wiring.

| | | |
|--------------------------|---|------------------------|
| Grille LED Lights | - | Marker Light |
| Black | - | Black (Chassis Ground) |
| Red | - | Yellow (+12volt) |

STEP 7



Using a soft pry tool, remove the foam corners from the factory grille and transfer them to the new grille.

STEP 8



Using a soft pry tool, remove the weather stripping from the factory grille and transfer it to the new grille.



STEP 9

Reinstall the grille using the (6) plastic push clips. Install the supplied weather stripping across the top edge of the grille.