



TITUS GRILLE

(2018+ WRANGLER JL)
(2020+ GLADIATOR JT)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Grille Assembly
- (1) Upper Mounting Bracket
- (8) M4 Bolts
- (8) M4 Flat Washers
- (8) M4 Flange Nuts
- (6) Vampire Clips

TOOLS REQUIRED

- Panel Removal Tool
- 7mm Wrench
- Phillips Screwdriver
- Flathead Screwdriver
- Pliers


STEP 1



Open the vehicle hood. Remove the upper weatherseal from the grille using a panel removal tool.

Note: The upper weatherseal will be reused during re-assembly.

STEP 2

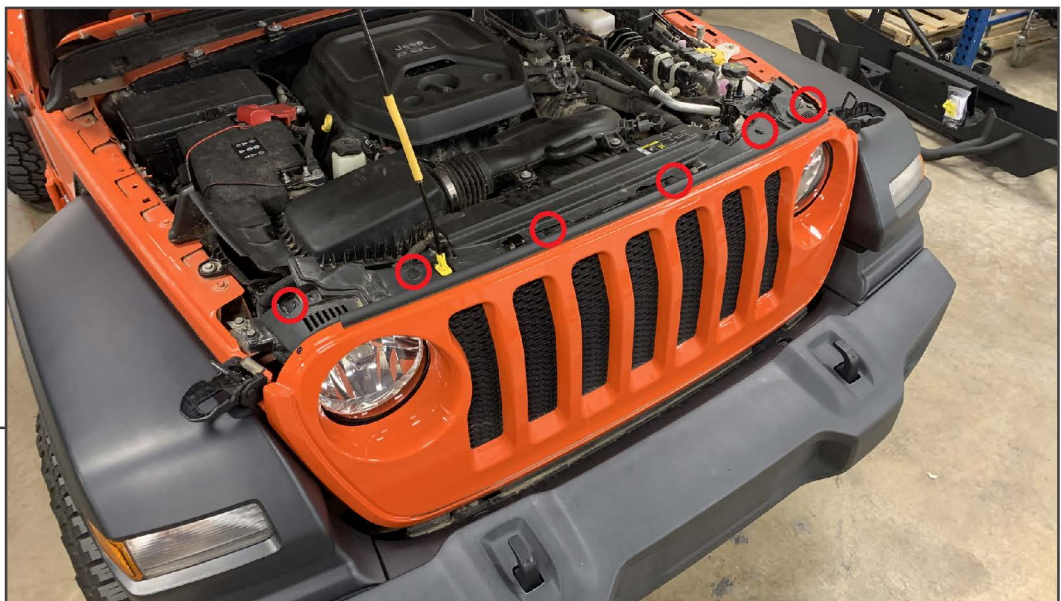

Remove (6) plastic push clips from the upper portion of the grille assembly.


Note: The (6) plastic clips will be reused during re-assembly.



STEP 3


Firmly pull the bottom of the grille away from the vehicle to dislodge the (8) grille vampire clips.

Ensure all of the original vampire clips are removed from the vehicle. Pliers or a flathead screwdriver can be used to remove the vampire clips from the radiator support, if necessary.

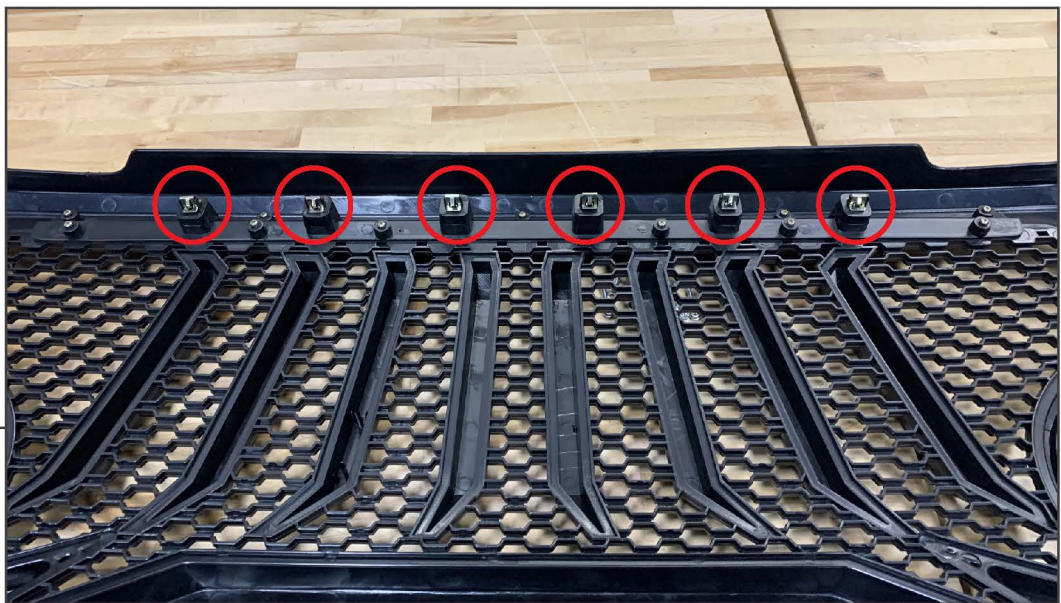

STEP 4

Place the grille face down on a soft surface. Install the (6) vampire clips to the bottom of the grille assembly.

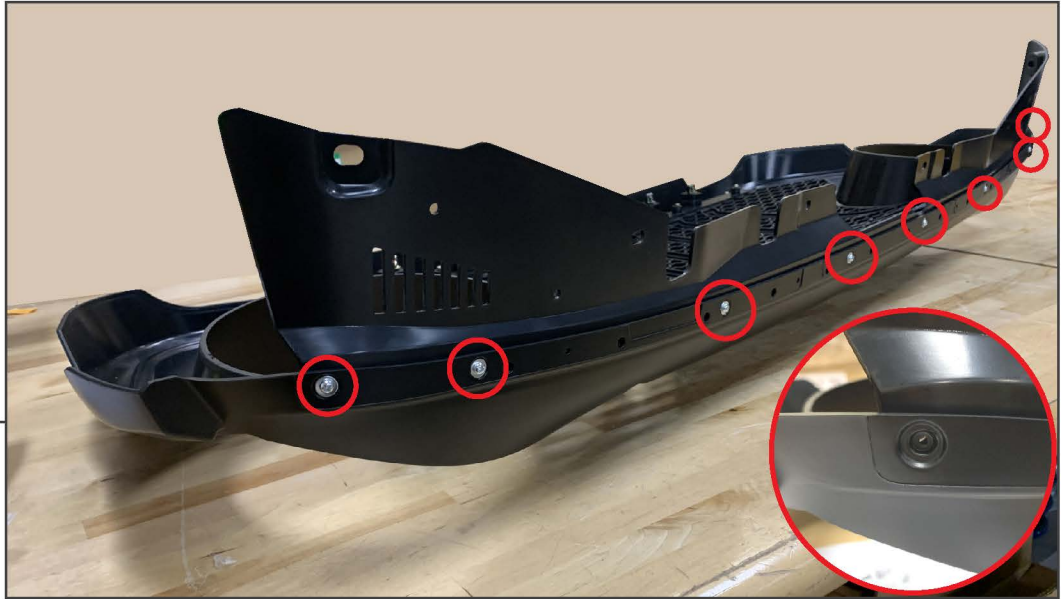**STEP 5**

Align the upper mounting bracket under the upper grille lip. Secure the mounting bracket to the grille using (8) M4 bolts, (8) M4 flat washers, and (8) M4 flange nuts. Ensure to only install the hardware in the holes with the cutout for the flat washer.

**STEP 6**

Align the grille assembly to the vehicle, and firmly press the lower vampire clips into the vehicle radiator support. Once the lower clips are secure, install the upper mounting bracket to the vehicle using the original (6) plastic push clips.



STEP 7

Install the upper weatherseal to the grille assembly by pressing the clips into the pre-drilled holes along the top of the grille.



STEP 8

Close the vehicle hood.

Installation is now complete.