



# TOMAHAWK GRILLE WITH LED LIGHTING

(2018-2023 WRANGLER JL)  
(2020-2023 GLADIATOR JT)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---


- (1) Grille Assembly
- (2) Grille Mounts (LH & RH)
- (1) Wiring Harness
- (6) Plastic Push Clips
- (8) Metal Retaining Clips
- (1) Weather Seal
- (4) Phillips Screws
- (1) Ring Terminal Connector
- (1) Fuse Tap
- (2) Scotchlok Connectors

### TOOLS REQUIRED

---

- Soft Pry Tool
- Phillips Head Screwdriver

SKU # J184714

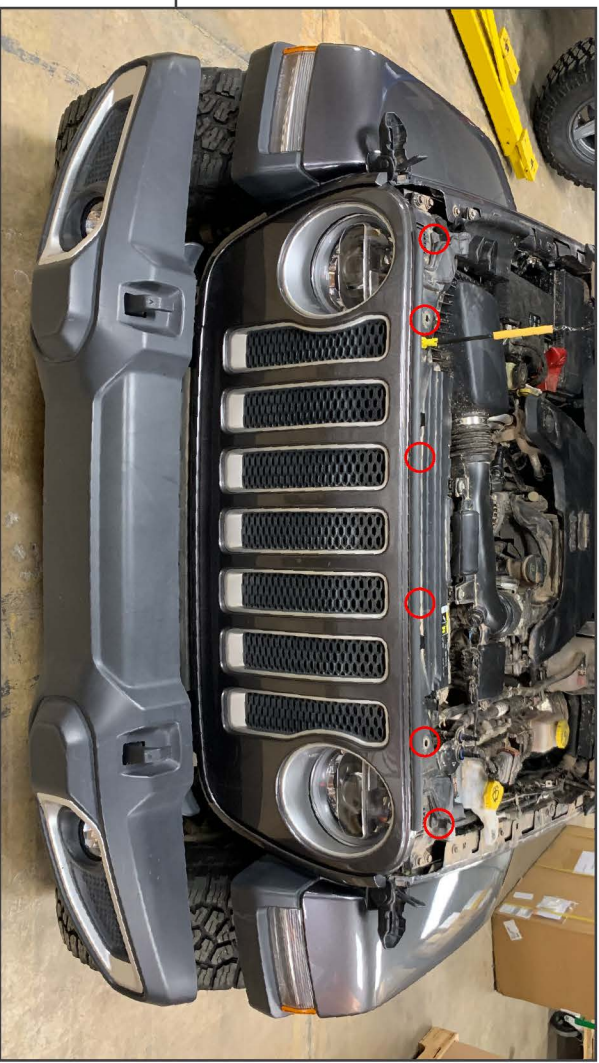

## STEP 1

Using a soft pry tool, remove the (6) plastic push pins across the top of the factory grille cover. Then firmly pull the grille cover away from the vehicle.



## STEP 2

Install the (8) supplied push clips to the clip posts across the bottom of the new grille.



## STEP 3

Using the supplied (2) Phillips screws per side, attach each upper grille mount to grille assembly.



## STEP 4

Route the wiring harness connectors towards the vehicle grille mounting area, and plug each connector into the grille.

Push the bottom of the grille towards the vehicle to engage the lower mounting clips, and then secure the top into place using the (6) plastic push clips.



## STEP 5

Fold back the fender liner to access the fender marker light wiring. Remove the (2) 8mm screws and (1) push clip.



## STEP 6

Wiring Instructions: Route the Yellow wire leads towards the vehicle fender lamp. Tap the grille wiring harness into the factory fender turn signal light wiring. Confirm wiring with a test light before splicing, vehicle year/trim level may vary harness color.

<b>Grille LED Light</b>	-	<b>Turn Signal Light</b>
Yellow [Turn Signal +]	-	White/Green [Turn Signal +]

## STEP 7



Fit the fuse tap to the RED wire harness lead, and fit into the vehicle fuse box at the indicated fuse [F58]. Neatly route the harness outwards, and then attach the ring terminal connector to the BLACK wire lead. Connect the ring terminal to the vehicle battery negative terminal.

## STEP 8



Installation is now complete.