



**PART# 836410R**

**2010+ TOYOTA 4RUNNER 2WD/4WD**

**1.25" LIFT REAR COIL SPACERS**



**2 HOUR INSTALL TIME**

### Components

**(2) 836410R REAR COIL SPACERS**

**Please double check the parts list before beginning installation to ensure all parts are present. If there is something missing, please contact Maxtrac Suspension (714) 630-0363. Please have the boxes present if parts are missing or damaged**

#### **PRIOR TO INSTALLATION:**

- 1. Factory service manual is recommended to have on hand.**
- 2. Secure and properly block vehicle prior to beginning installation.**
- 3. Always wear safety glasses when using power tools or working under the vehicle**
- 4 Modification to any part will void the warranty associated with that product**

**AFTER REMOVING PARTS FROM VEHICLE, SAVE HARDWARE FOR REINSTALLATION**

EDITED 4/22/2025


## REAR SPACER INSTALL



**Step 1** Jack up the rear of the truck and support under the frame rails with jack stands. Keep an adjustable jack under the differential for height adjustment.




**Step 2** Apply some pressure to the differential with the jack and then unbolt both rear shocks at the axle and separate.

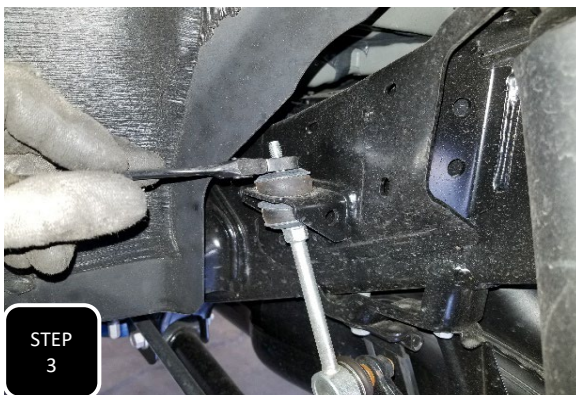

**Step 3** Unbolt both sway bar end links from the frame and remove the upper bushing.




**Step 4** Lower the axle and remove both coil springs along with the bumpstop on top of the coils.

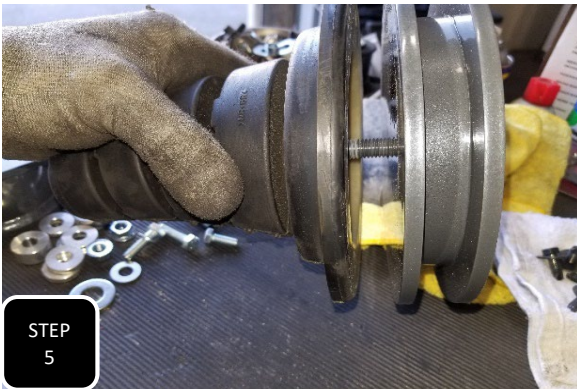

**Step 5** Locate the new spacer and thread it into the hole in the top of the bump stop. Apply pressure between the bump stop and spacer to get the threads started and thread it down until it fully seats.



**Step 6** Loosen both trac bar bolts and remove the upper bolt. **NOTE: THIS WILL ALLOW FOR YOU TO LOWER THE AXLE MORE AND MAKE FOR AN EASIER INSTALL WITH THE ADDED HEIGHT OF THE SPACER.**

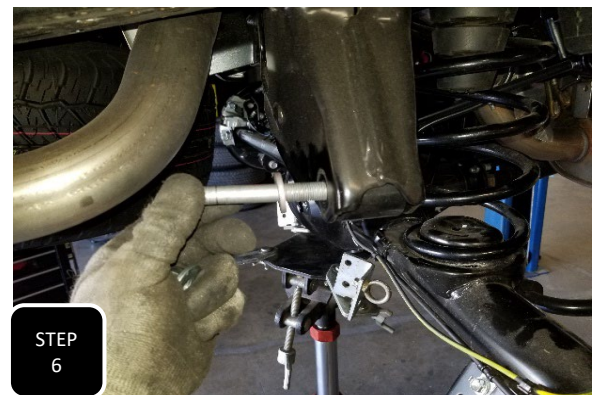



STEP  
7

STEP  
7

**Step 7** Lower the axle enough to install the coil with the spacer. Ensure that they properly seat top and bottom. **NOTE: MAKE SURE THE BRAKE LINES AND ABS LINES HAVE PLENTY OF SLACK AND DO NOT GET STRETCHED OUT.**




STEP  
8

**Step 8** Jack up the axle and re-attach the shocks to the mount on the axle. Torque these bolts to 40 ft/lbs.





STEP  
9

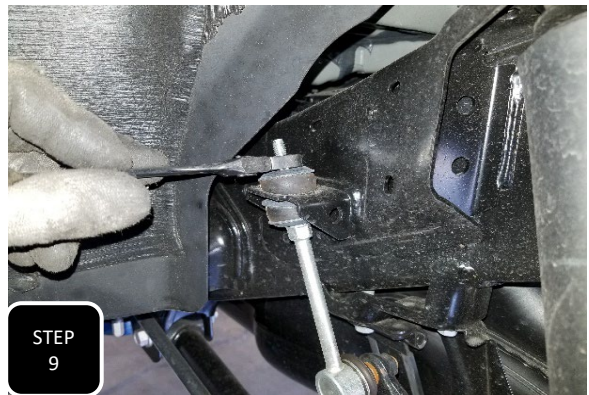

STEP  
9

**Step 9** Re-install the upper sway bar bushings and tighten down. The bushings should have load applied to them, but not be crushed. "They need to move"

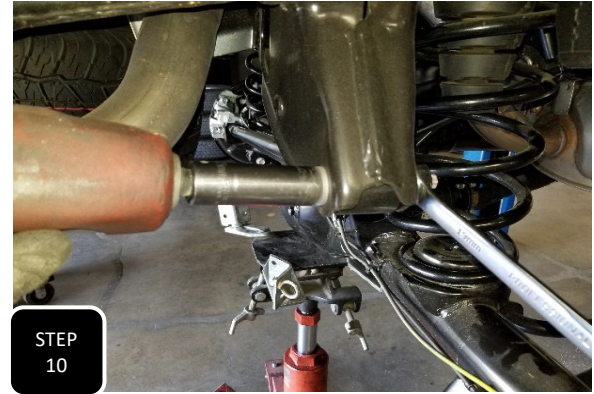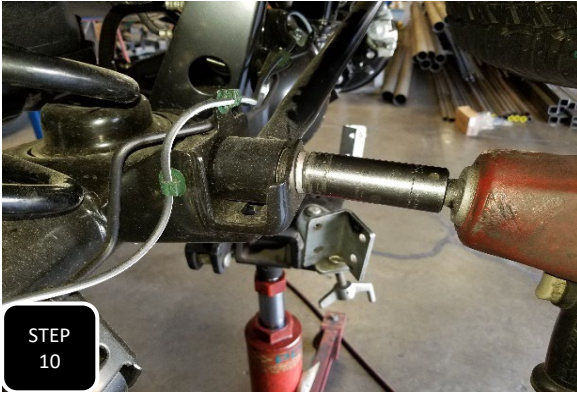

**Step 10** Once the truck is back on the ground at ride height, then you can re-attach the trac bar with more ease. You can use a ratchet strap from the frame to the axle, to align the bolt hole, if you are having trouble getting the upper bolt back in. Next, torque both bolts to 100 ft/lbs.



**MaxTrac**  
s u s p e n s i o n

## RIDE HEIGHT SHEET

\*THIS SHEET MUST BE FILLED OUT PRIOR TO CALLING WITH ANY DISCREPENCIES

YEAR \_\_\_\_\_ MAKE \_\_\_\_\_ MODEL \_\_\_\_\_

4WD / 2WD / AWD

### MEASUREMENTS

\*MOST ACCURATE MEASUREMENT IS FROM THE BOTTOM OF THE RIM, STRAIGHT UP TO THE BOTTOM OF THE FENDER

\*TRUE HEIGHT WONT BE ACCURATE UNTIL VEHICAL IS ALIGNED

\*THE VEHICLE'S CASTER WILL BE INCREASED OR DECREASED IF ONLY THE FRONT OF THE VEHICLE IS MODIFIED

	BEFORE	AFTER	DIFFERENCE
DRIVER FRONT	_____	_____	_____
DRIVER REAR	_____	_____	_____
PASSENGER FRONT	_____	_____	_____
PASSENGER REAR	_____	_____	_____

# LIMITED LIFETIME WARRANTY

Our limited lifetime warranty excludes the following items: bushings, bump stops, ball joints, tie rod ends, rod end/heim joints, and shock absorbers. These parts are subject to immediate wear and tear and are not considered defective when worn. They are warranted for twelve (12) months from the date of purchase only for defects in workmanship.

This Max Trac warranty is void if (1) the vehicle is not aligned after kit installation, (2) proper maintenance is not routinely performed, (3) the Max Trac products are misused or abused in any way in either installation or service, or (4) the products are used in a way that violates federal, state, or local law or regulation in any respect. Max Trac is not responsible for vehicle compatibility with other aftermarket products. Warranty coverage does not include consumer opinions regarding ride comfort, fitment and design after product installation.

Max Trac reserves the right to change, modify or cancel this warranty without prior notice.

**WARRANTY RETURN**

Contact Maxtrac by sending an email with a copy of the original purchase receipt, along with photographs clearly illustrating the failure mode.

1. Upon validating the information provided, Maxtrac will issue a Return Manufacturer Authorization number (RMA).
2. Return your product to Max Trac Suspension at your expense in order to execute a claim under this warranty.
3. Include the RMA on the outside of the box. Any returns without the RMA will be refused.

**NON WARRANTY RETURN CREDIT POLICY**

Your item must be in its original unused and resalable condition to be returned, unless there is a manufacturing defect. You must return the item within 30 days of your purchase. Otherwise, there will be an additional restocking fee.

1. Please contact Max Trac Suspension at (844) 535-1668 to obtain a Return Manufacturer Authorization Number (RMA).
2. Return your product to Max Trac Suspension at your expense.
3. Include the RMA on the outside of the box. Any returns without the RMA will be refused.

**Return Receipt**  
Merchandise that has been installed, used, or altered may be subject to no credit.

**Restocking Fee**  
All items are subject to a restocking fee based on the condition of the packaging and product. Max Trac Suspension does not credit shipping and handling. Credit minus applicable restocking fee will be determined and issued within 10 business days of product receipt. All returns will be credited to your Maxtrac account.



# INSTALLATION WARNINGS

**READ INSTRUCTIONS AND WARNINGS COMPLETELY PRIOR TO INSTALLATION.**

**MAXTRAC IS NOT RESPONSIBLE FOR ANY DAMAGE OR INJURY DUE TO IMPROPER INSTALLATION OR MAINTENANCE.**

Installer is responsible to insure a safe and controllable vehicle after performing modifications. All steps and procedures described in these instructions were performed while the vehicle was properly supported on a two post vehicle lift with safety jacks. Included instructions are recommended guidelines only.

Max Trac Suspension recommends reference to the OE Service Manual corresponding to the model and year of vehicle when either disassembling or assembling factory and related components.

Use caution during all disassembly and assembly steps to insure suspension components are not over extended, causing damage to any vehicle components and parts included in this kit. Unless otherwise specified, tighten all bolts and fasteners to standard torque specifications listed within the OE Service Manual.

Suspension components that use rubber or urethane bushings should be tightened with the vehicle at normal ride height. This will prevent premature wear or failure of the bushing and maintain ride comfort.

Larger tire and wheel combinations may increase leverage on suspension, steering, and related components.

Due to payload options and initial ride height variances, the amount of lift is a base figure. Final ride height dimensions may vary in accordance to original vehicle ride height. Always measure the vehicle ride height prior to beginning of installation.

**MAXTRAC SUSPENSION DOES NOT ADVISE USING WHEELS WIDER THAN 9" OR WHEELS WITH LESS THAN 4.5" BACKSPACING. DOING SO WILL RESULT IN VOIDING ANY AND ALL MANUFACTURER WARRANTIES**

Max Trac Suspension does not recommend the combined use of suspension lifts, body lifts, or other lifting devices.

## **F C e A t e t**

Once the vehicle is lowered to the ground, check all parts which have rubber or urethane components to ensure proper torque. Torque lug nuts to the wheel manufacturer specs.

Move vehicle backwards and forwards a short distance to allow suspension components to settle. Turn the front wheels completely left then right and verify adequate tire, wheel, brake line, and A S wire clearance.

Test and inspect steering, brake and suspension components for tightness and proper operation. Inspect brakes, hoses, and A S lines for adequate slack at full extension, and adjust as necessary.



# ADDITIONAL WARNINGS

## **WARNING**

Max Trac Suspension products should ONLY be installed by a certified professional mechanic with experience working on and installing suspension products. Professional knowledge and skill will typically yield the best installation results.

If you need a list of installers in your area, please contact Max Trac Suspension customer service to find one of our authorized dealers. Max Trac Suspension does not warrant work performed by any dealer, installer, or mechanic.

- All lifted vehicles may require additional driveline modifications and/or balancing.
- A factory Service Manual for your specific Year/ Make / Model should be referenced during installation.
- Use of a vehicle hoist will greatly reduce installation time.
- Speedometer / computer calibration is required if changing +/- from factory tire diameter.
- Vehicle must be in excellent operating condition. Repair or replace any and all worn or damaged components prior to installation.

**FAILURE TO PERFORM POST INSTALLATION INSPECTION AND/OR CHECKS MAY RESULT IN VEHICLE COMPONENT DAMAGE AND/OR PERSONAL INJURY OR DEATH.**

**RECHECK ALL HARDWARE FOR PROPER TORQUE VALUES AFTER 500 MILES AND THEN PERIODICALLY AT EACH SERVICE INTERVAL THEREAFTER.**

## **Vehicle Height**

Increasing the height of your vehicle raises the center of gravity and **WILL** affect stability and control. Use caution on turns and when steering. Vehicles with larger tires and wheels will handle differently than stock vehicles. Take time to familiarize yourself with the handling of your vehicle after product installation.

## **Wheel Alignment**

It is necessary after installation to have a wheel alignment performed by a certified alignment technician. Align the vehicle to factory specifications. It is recommended that your vehicle alignment be checked after any off-road driving. In addition to vehicle alignment, it is necessary to check and adjust vehicle head lamps for proper aim and alignment. If the vehicle is equipped with active or passive safety/collision monitoring and / or avoidance systems including, but not limited to, camera-or radar-based systems, check and adjust your vehicle's systems for proper aim and function.

## **Braking**

Generally, braking performance and capabilities are decreased when significantly larger or heavier tires and wheels are used. Take this into consideration while driving. Also, changing axle gear ratios or using tires that are taller or shorter than factory height will cause an erroneous speedometer reading. On vehicles equipped with an electronic speedometer, the speed signal impacts other important functions as well. Speedometer recalibration for both mechanical and electronic types is highly recommended.



# SAFETY WARNINGS

## SAFETY WARNING

MISUSE OF THIS PRODUCT COULD LEAD TO INJURY OR DEATH.

- Suspension systems or components that enhance the on and off-road performance of your vehicle may cause it to handle differently than it did from the factory. EXTREME CARE must be used to prevent loss of control or vehicle rollover during operation.
- ALWAYS operate your vehicle at reduced speeds and maintain distance between vehicles and obstacles to ensure your ability to control your vehicle under all driving conditions. Failure to drive safely may result in serious injury or death to the driver and passengers.
- Driver and passengers must ALWAYS wear seat belts, avoid rapid steering angles and rates and other sudden maneuvers.
- You should NEVER operate your vehicle under the influence of alcohol or drugs.
- Please check all factory components for excessive wear and tear. Please replace worn factory parts before installing any suspension kits. Failure to do so will void any Max Trac warranty.
- Please inspect all wheel bearings and hub bearings for excessive wear and replace worn components before installing suspension kits. These hub and wheel bearings may wear out sooner with installation of larger tires and wheels. MaxTrac does not warranty these factory parts at any time, also using any wheel that MaxTrac does not recommend will void any warranty of MaxTrac components.
- Constant maintenance is required to keep your vehicle safe. Thoroughly inspect your vehicle before and after every off-road use.
- It is the responsibility of the retailer and/or the installer to review all state and local laws with the end user of this product related to bumper height laws and the lifting of a vehicle before the purchase and installation of any Max Trac products.
- It is the responsibility of the driver to check the area around the vehicle for obstructions, people, and animals before moving the vehicle.
- All lifted vehicles have increased blind spots. Take note of these prior to operating the vehicle.

**DAMAGE IN JURY AND/OR DEATH CAN OCCUR IF ANY OF THE ABOVE WARNINGS ARE NOT FOLLOWED.**



**PART# 836825-4**

**2005-2023 TOYOTA TACOMA 4WD**  
**2003-2024 TOYOTA 4RUNNER 4WD**  
**2006+ TOYOTA FJ CRUISER 4WD**



2.5 HOUR INSTALL TIME



Recommended Tire size  
 33x11.50

Components	Hardware
(2) 836825 STRUT SPACER	(2) 9/16-18 X 6 HEX CAP SCREW
(2) 8368DD 1" ALUM SPACER	(2) 9/16-18 NYLOCK NUT
(2) 8368SP 1/2" ALUM SPACER	(2) 9/16" FLAT WASHER
(2) 8364SP 3/4" ALUM SPACER	(2) M8-1.25 X 40 HEX CAP SCREW
(2) 9/16WASHER 1/8" GOLD SPACER	(2) M8-1.25 X 30 HEX CAP SCREW
	(4) M8 FLAT WASHER

Please double check the parts list before beginning installation to ensure all parts are present. If there is something missing, please contact Maxtrac Suspension (714) 630-0363. Please have the boxes present if parts are missing or damaged

**PRIOR TO INSTALLATION:**

1. Factory service manual is recommended to have on hand.
2. Secure and properly block vehicle prior to beginning installation.
3. Always wear safety glasses when using power tools or working under the vehicle
- 4 Modification to any part will void the warranty associated with that product

AFTER REMOVING PARTS FROM VEHICLE, SAVE HARDWARE FOR REINSTALLATION

REVISED 1/9/2024




**Step 1** Jack up the front of the of the vehicle and support under the frame rails with jack stands. Remove both front tires and proceed with one side at a time.



**Step 2** Remove the cotter pin that is engaged in the outer tie rod end.




**Step 3** Loosen the tie rod nut, then break the tie rod loose by hitting the side of the steering arm with a hammer and separate. **NOTE: NEVER HIT THE TIE ROD ON THE THREADS.**

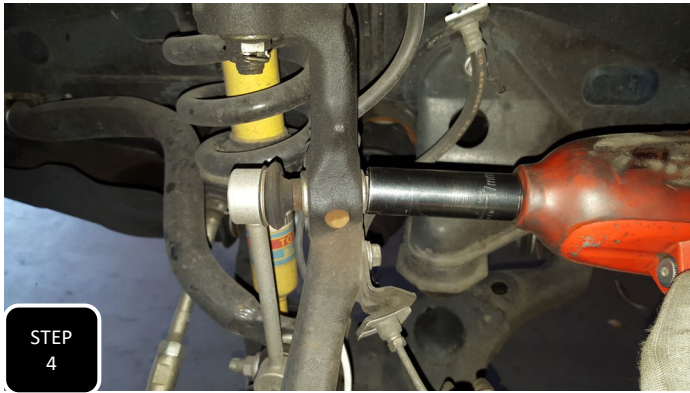


**Step 4** Unbolt the sway bar end link from the neck of the spindle and separate.



**Step 5** Loosen and remove the 3 nuts at the top of the strut and the single bolt at the bottom of the strut.

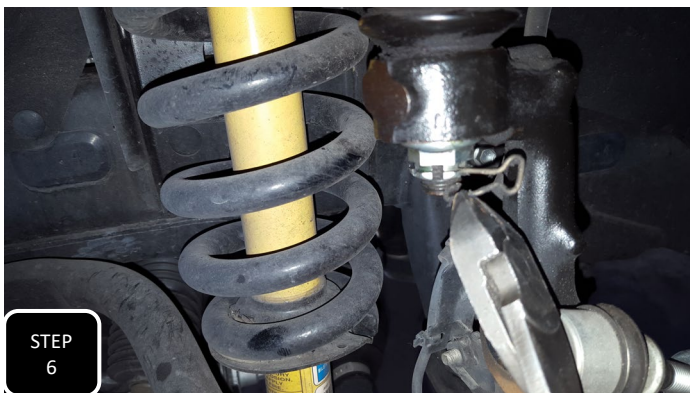


**Step 6** Remove the clip at the upper ball joint and then loosen the nut, but do not remove. Break the ball joint loose by hitting the side of the spindle with a hammer, the nut will catch the spindle, then separate. **NOTE: NEVER HIT THE BALL JOINT ON THE THREADS.**

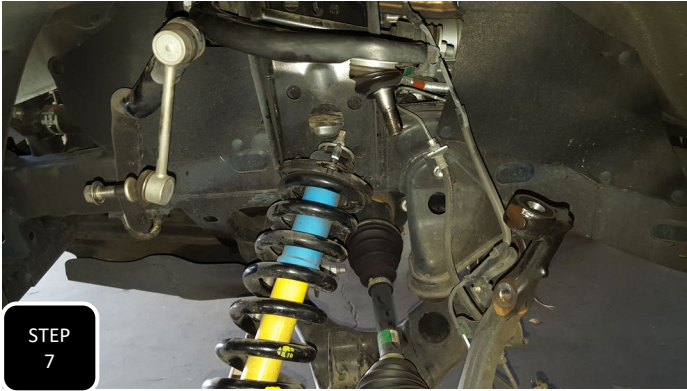

**Step 7** Remove the strut and then attach the strut spacer to the top of the strut using the factory nuts and tighten.



**Step 8** Re-install the strut assembly back into the truck and loosely attach the hardware at the top and bottom.

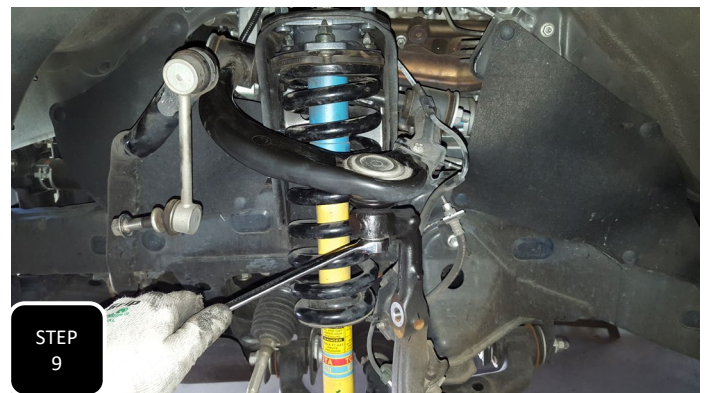


**Step 9** Place a floor jack under the lower control arm and jack up to compress the coil. Now re-attach the upper control arm to the spindle, tighten the castle nut, and re-install the factory clip.



**Step 10** Tighten the provided nuts at the top of the strut and the factory bolt at the bottom.



**Step 11** Re-attach the sway bar end link to the spindle and tighten. **NOTE: THIS STEP SHOULD BE DONE AFTER THE SPACERS HAVE BEEN INSTALLED ON BOTH SIDES.**

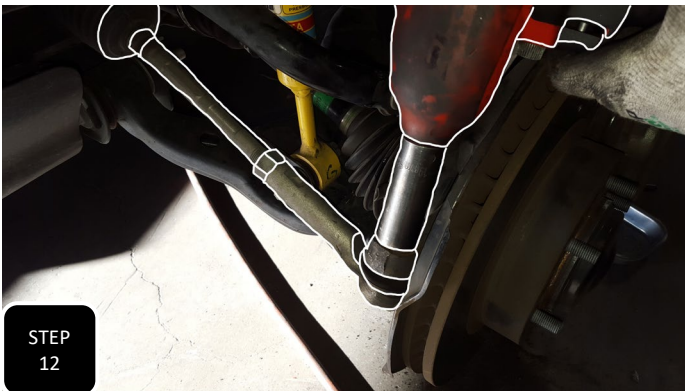

**Step 12** Re-attach the tie rod to the spindle and tighten. Once tight, re-install the factory cotter pin.

REPEAT STEPS 1-12 ON THE OTHER SIDE

## DIFF DROP INSTALL




**Step 13** Unbolt all 4 bolts holding the primary skid plate on and remove the skid plate.



**Step 14** Place an adjustable jack under the front differential and remove the two front mounting bolts. **NOTE: THERE IS ONE MORE DIFF MOUNT TOWARDS THE BACK ON THE DRIVER'S SIDE THAT THE DIFF WILL PIVOT DOWNWARD ON.**



**Step 15** For models with stamped steel supports, bend down the lip of the sub frame support to make way for the diff mount in its new, lower position.

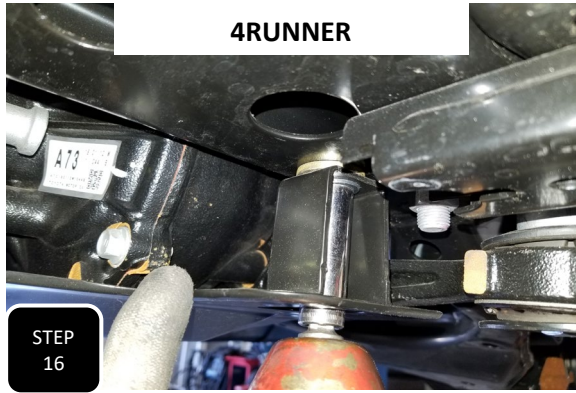

4RUNNER



TACOMA

**Step 16** If your truck is equipped with a secondary skid plate directly below the differential, then remove the front two mounting bolts and for:  
(4Runners) Install the 1/8" thick gold washer with the provided M8-1.25 x 30 bolts and washers.  
(Tacomas) Install the 1/2" thick aluminum spacers with the provided M8-1.25 x 30 bolts and washers.



**Step 17** Some secondary skid plates will have a tab that will need to be bent to clear the diff mount. If your truck has this, bend it now.



**Step 18** Lower the jack down and install the provided 1" tall spacers. Re-use the factory cup shaped washer at the bottom along with the provided 9/16" bolt, nut, and washer at the top. **NOTE: IF THE NYLOCK DOES NOT MAKE CONTACT WITH THE THREADS, OMIT THE WASHER.**



**Step 19** Once the diff drop spacers are tight, locate your primary skid plate. Using a 1/2" drill bit, enlarge the two forward most mounting holes.



**Step 20** Re-install the skid plate using the provided 3/4" tall spacers along with the provided M8-1.25 x 40 bolts and washers near the diff and the factory bolts near the front bumper.

**-Make sure to check the vehicle's toe before driving.**

**-The headlights should be adjusted after modifying the stance of the vehicle.**

**-The vehicle's alignment will need to be adjusted.**

**-All suspension components should be re-torqued after 500 miles.**



**MaxTrac**  
s u s p e n s i o n

## RIDE HEIGHT SHEET

\*THIS SHEET MUST BE FILLED OUT PRIOR TO CALLING WITH ANY DISCREPENCIES

YEAR \_\_\_\_\_ MAKE \_\_\_\_\_ MODEL \_\_\_\_\_

4WD / 2WD / AWD

### MEASUREMENTS

\*MOST ACCURATE MEASUREMENT IS FROM THE BOTTOM OF THE RIM, STRAIGHT UP TO THE BOTTOM OF THE FENDER

\*TRUE HEIGHT WONT BE ACCURATE UNTIL VEHICAL IS ALIGNED

\*THE VEHICLE'S CASTER WILL BE INCREASED OR DECREASED IF ONLY THE FRONT OF THE VEHICLE IS MODIFIED

	BEFORE	AFTER	DIFFERENCE
DRIVER FRONT	_____	_____	_____
DRIVER REAR	_____	_____	_____
PASSENGER FRONT	_____	_____	_____
PASSENGER REAR	_____	_____	_____

# LIMITED LIFETIME WARRANTY

Max Trac Suspension makes no warranty, expressed or implied, as to the merchantability, fitness for purpose, description, quality, productiveness, accuracy or any other matter with respect to every product, all such warranties being hereby specifically and expressly disclaimed by Max Trac. Max Trac may offer technical advice or assistance with regard to the products based on laboratory and/or field experience and customer understands and agrees that such advice represents only good faith opinions and does not constitute a warranty or guarantee. The sole and express warranty provided by Max Trac is to warrant that the products sold as listed comply with Max Trac's specification at the date and time of manufacture. Max Trac makes no warranty that such products shall meet such specification at any time after installation of products. Use of such product is specifically not warranted, and Max Trac specifically excludes from this express warranty parts subject to normal wear and tear after one year, finish after one year, damage resulting from failure to follow recommendations in installation manuals, competition or off-road use, and damages caused by aftermarket products. Max Trac's liability and customer's exclusive remedy for any breach of this limited express warranty is limited to repair, replacement, or refund at Max Trac's option and in Max Trac's sole discretion. There are no warranties which extend beyond the description on the face hereof.

Our limited lifetime warranty excludes the following items: bushings, bump stops, ball joints, tie rod ends, rod end/heim joints, and shock absorbers. These parts are subject to immediate wear and tear and are not considered defective when worn. They are warranted for twelve (12) months from the date of purchase only for defects in workmanship.

This Max Trac warranty is void if (1) the vehicle is not aligned after kit installation, (2) proper maintenance is not routinely performed, (3) the Max Trac products are misused or abused in any way in either installation or service, or (4) the products are used in a way that violates federal, state, or local law or regulation in any respect. Max Trac is not responsible for vehicle compatibility with other aftermarket products. Warranty coverage does not include consumer opinions regarding ride comfort, fitment and design after product installation.

Max Trac reserves the right to change, modify or cancel this warranty without prior notice.

## **WARRANTY RETURN**

Contact Maxtrac by sending an email with a copy of the original purchase receipt, along with photographs clearly illustrating the failure mode.

1. Upon validating the information provided, Maxtrac will issue a Return Manufacturer Authorization number (RMA).
2. Return your product to Max Trac Suspension at your expense in order to execute a claim under this warranty.
3. Include the RMA on the outside of the box. Any returns without the RMA will be refused.

## **NON-WARRANTY RETURN CREDIT POLICY**

Your item must be in its original unused and resalable condition to be returned, unless there is a manufacturing defect. You must return the item within 30 days of your purchase. Otherwise, there will be an additional restocking fee.

1. Please contact Max Trac Suspension at (844) 535-1668 to obtain a Return Manufacturer Authorization Number (RMA).
2. Return your product to Max Trac Suspension at your expense.
3. Include the RMA on the outside of the box. Any returns without the RMA will be refused.

## **Return Exceptions**

Merchandise that has been installed, used, or altered may be subject to no credit.

## **Restocking Fee**

All items are subject to a restocking fee based on the condition of the packaging and product.

Max Trac Suspension does not credit shipping and handling. Credit minus applicable restocking fee will be determined and issued within 10 business days of product receipt.

All returns will be credited to your Maxtrac account.



# INSTALLATION WARNINGS

**READ INSTRUCTIONS AND WARNINGS COMPLETELY PRIOR TO INSTALLATION.**

**MAX TRAC IS NOT RESPONSIBLE FOR ANY DAMAGE OR INJURY DUE TO IMPROPER INSTALLATION OR MAINTENANCE.**

Installer is responsible to insure a safe and controllable vehicle after performing modifications. All steps and procedures described in these instructions were performed while the vehicle was properly supported on a two post vehicle lift with safety jacks. Included instructions are recommended guidelines only.

Max Trac Suspension recommends reference to the OE Service Manual corresponding to the model and year of vehicle when either disassembling or assembling factory and related components.

Use caution during all disassembly and assembly steps to insure suspension components are not over extended, causing damage to any vehicle components and parts included in this kit. Unless otherwise specified, tighten all bolts and fasteners to standard torque specifications listed within the OE Service Manual.

Suspension components that use rubber or urethane bushings should be tightened with the vehicle at normal ride height. This will prevent premature wear or failure of the bushing and maintain ride comfort.

Larger tire and wheel combinations may increase leverage on suspension, steering, and related components.

Due to payload options and initial ride height variances, the amount of lift is a base figure. Final ride height dimensions may vary in accordance to original vehicle ride height. Always measure the vehicle ride height prior to beginning of installation.

**MAX TRAC SUSPENSION DOES NOT ADVISE USING WHEELS WIDER THAN 9" OR WHEELS WITH LESS THAN 4.5" BACKSPACING. DOING SO WILL RESULT IN VOIDING ANY AND ALL MANUFACTURER WARRANTIES**

Max Trac Suspension does not recommend the combined use of suspension lifts, body lifts, or other lifting devices.

## **Final Checks Adjustments**

Once the vehicle is lowered to the ground, check all parts which have rubber or urethane components to ensure proper torque. Torque lug nuts to the wheel manufacturer specs.

Move vehicle backwards and forwards a short distance to allow suspension components to settle. Turn the front wheels completely left then right and verify adequate tire, wheel, brake line, and ABS wire clearance.

Test and inspect steering, brake and suspension components for tightness and proper operation. Inspect brakes, hoses, and ABS lines for adequate slack at full extension, and adjust as necessary.



# ADDITIONAL WARNINGS

## WARNINGS

Max Trac Suspension products should ONLY be installed by a certified professional mechanic with experience working on and installing suspension products. Professional knowledge and skill will typically yield the best installation results.

If you need a list of installers in your area, please contact Max Trac Suspension customer service to find one of our authorized dealers. Max Trac Suspension does not warrant work performed by any dealer, installer, or mechanic.

- All lifted vehicles may require additional driveline modifications and/or balancing.
- A Factory Service Manual for your specific Year/ Make / Model should be referenced during installation.
- Use of a vehicle hoist will greatly reduce installation time.
- Speedometer / computer calibration is required if changing +/- from factory tire diameter.
- Vehicle must be in excellent operating condition. Repair or replace any and all worn or damaged components prior to installation.

**FAILURE TO PERFORM POST INSTALLATION INSPECTION AND OR CHECKS MAY RESULT IN VEHICLE COMPONENT DAMAGE AND OR PERSONAL INJURY OR DEATH.**

**RECHECK ALL HARDWARE FOR PROPER TORQUE VALUES AFTER 500 MILES, AND THEN PERIODICALLY AT EACH SERVICE INTERVAL THERAFTER.**

### Vehicle Handling Warning

Increasing the height of your vehicle raises the center of gravity and **WILL** affect stability and control. Use caution on turns and when steering. Vehicles with larger tires and wheels will handle differently than stock vehicles. Take time to familiarize yourself with the handling of your vehicle after product installation.

### Wheel Alignment Headlamp Adjustment

It is necessary after installation to have a wheel alignment performed by a certified alignment technician. Align the vehicle to factory specifications. It is recommended that your vehicle alignment be checked after any off-road driving. In addition to vehicle alignment, it is necessary to check and adjust vehicle head lamps for proper aim and alignment. If the vehicle is equipped with active or passive safety/collision monitoring and / or avoidance systems including, but not limited to, camera-or radar-based systems, check and adjust your vehicle's systems for proper aim and function.

### Braking Warning

Generally, braking performance and capabilities are decreased when significantly larger or heavier tires and wheels are used. Take this into consideration while driving. Also, changing axle gear ratios or using tires that are taller or shorter than factory height will cause an erroneous speedometer reading. On vehicles equipped with an electronic speedometer, the speed signal impacts other important functions as well. Speedometer recalibration for both mechanical and electronic types is highly recommended.



# SAFETY WARNINGS

## SAFETY WARNINGS

MISUSE OF THIS PRODUCT COULD LEAD TO INJURY OR DEATH.

- Suspension systems or components that enhance the on and off-road performance of your vehicle may cause it to handle differently than it did from the factory. EXTREME CARE must be used to prevent loss of control or vehicle rollover during operation.
- ALWAYS operate your vehicle at reduced speeds and maintain distance between vehicles and obstacles to ensure your ability to control your vehicle under all driving conditions. Failure to drive safely may result in serious injury or death to the driver and passengers.
- Driver and passengers must ALWAYS wear seat belts, avoid rapid steering angles and rates and other sudden maneuvers.
- You should NEVER operate your vehicle under the influence of alcohol or drugs.
- Please check all factory components for excessive wear and tear. Please replace worn factory parts before installing any suspension kits. Failure to do so will void any Max Trac warranty.
- Please inspect all wheel bearings and hub bearings for excessive wear and replace worn components before installing suspension kits. These hub and wheel bearings may wear out sooner with installation of larger tires and wheels. MaxTrac does not warranty these factory parts at any time, also using any wheel that MaxTrac does not recommend will void any warranty of MaxTrac components.
- Constant maintenance is required to keep your vehicle safe. Thoroughly inspect your vehicle before and after every off-road use.
- It is the responsibility of the retailer and/or the installer to review all state and local laws with the end user of this product related to bumper height laws and the lifting of a vehicle before the purchase and installation of any Max Trac products.
- It is the responsibility of the driver to check the area around the vehicle for obstructions, people, and animals before moving the vehicle.
- All lifted vehicles have increased blind spots. Take note of these prior to operating the vehicle.

**DAMAGE, INJURY AND OR DEATH CAN OCCUR IF ANY OF THE ABOVE WARNINGS ARE NOT FOLLOWED.**